ENGINEERING NEWS-RECORD

★

★

A McGRAW-HILL PUBLICATION

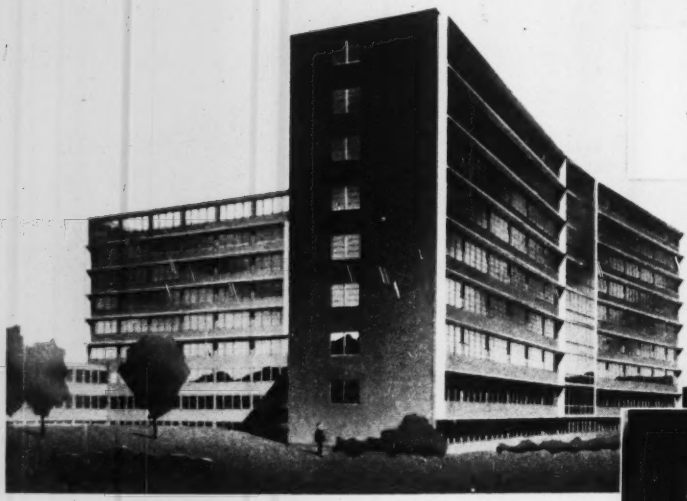

NORTHVILLE STATE HOSPITAL
NORTHVILLE, MICHIGAN
E. R. Little Co., *Engineers*
O'Dell, Hewlett & Luckenbaugh, *Architects*
Drake-Avery Co., *Fabricators*
Stanley Carter, *Fabricator*



IN THE NATION'S LARGEST RADIANT HEATED HOSPITAL

—BYERS WROUGHT IRON PIPE
SAFEGUARDS THE HEATING AND 6 OTHER SERVICES

In addition to its architectural distinction, this hospital is notable for its radiant heating system—an estimated total of 600,000 feet of genuine wrought iron pipe will be used for this service making it the largest radiant heating system ever installed in a hospital. In the Medical Unit shown above, over 130,000 feet already has been installed. The system, utilizing Byers Wrought Iron pipe, is designed to produce approximately two-thirds of the necessary heat. A ventilating system, taking heat from steam coils, makes up the balance. The radiant heating system is controlled by means of outdoor thermostatic equipment regulating the water temperature, and indoor zone thermostatic equipment operating zone pumps. Byers Wrought Iron pipe was also used in all hot and cold water lines, 3-inch and smaller; soil lines; waste and vent lines above ground; and hot water and hot recirculating lines in the tunnel piping. E. R. Little Company, Inc., are Engineers on the project.

The specifiers followed sound, proven practice by specifying genuine wrought iron. This material is serving in the oldest installations in the country, and its durability is further confirmed by previous records of long life under identical service conditions.

Our booklet, THE ABC's OF WROUGHT IRON tells the what, how, and where of genuine wrought iron. Ask for a copy.

A. M. Byers Company, Pittsburgh, Pa. Established 1864. Boston, New York, Philadelphia, Washington, Atlanta, Chicago, St. Louis, Houston, San Francisco. Export Division: New York, N. Y.



Why Genuine Wrought Iron Lasts

This notch-fracture test specimen illustrates the unusual fibrous structure of genuine wrought iron—which is responsible for the unusual corrosion resistance of the material. Tiny threads of glass-like silicate slag, distributed through the body of high-purity iron, halt and disperse corrosive attack, and discourage pitting and penetration. They also anchor the initial protective scale, which shields the underlying metal.

BYERS

CORROSION COSTS YOU MORE THAN WROUGHT IRON
WROUGHT IRON
TUBULAR AND HOT ROLLED PRODUCTS
ELECTRIC FURNACE QUALITY ALLOY AND STAINLESS STEEL PRODUCTS

TOUGH?

Man, they're super-tough!

ARE stone bruises, cuts, snags, on tire killing jobs giving you headaches? If so, your answer is the Hard Rock Lug—because its tread and sidewalls are armored by massive lug bars as protection against cuts and rips—because its extra-thick undertread protects an extra-thick carcass—because its self-cleaning tread assures outstanding traction, unmatched performance.

The Hard Rock Rib is the perfect companion tire for front wheels in rock work. It has the same cord body, same shoulder and sidewall as the Hard Rock Lug, provides easier steering and smooth rolling on even the roughest jobs.

Proof? *More tons are hauled on Goodyear truck tires than on any other kind!*

TWO MORE REASONS WHY IT PAYS TO BUY AND SPECIFY GOODYEAR

ALL-WEATHER
Finest for flotation, rolling big loads faster

SURE-GRIP
Tops for drive-wheel traction on graders and pans

GOODYEAR

We think you'll like "THE GREATEST STORY EVER TOLD"—Every Sunday—ABC Network

All-Weather, Sure-Grip—T. M.'s The Goodyear Tire & Rubber Company, Akron, Ohio

6 hours' work done in 45 minutes

ANYONE CAN USE THE

BERGER JIG COLLIMATOR

famous for

ACCURACY IN ACTION

Jicol

In actual production, the Berger Jig Collimator enables precision alignment in a small fraction of the time normally taken by other methods.

WHEREVER THERE IS NEED FOR PRECISE ALIGNMENT

—in Toolroom, Aircraft Production, Machine Tool Manufacture, Shipbuilding, Construction of Master Jigs; Aligning large Assemblies, and in many other industrial uses...

your plant personnel can use the Berger Jig Collimator readily. No special training is required.

Accurate vertical and horizontal lines are easily obtained and all points on the Jig or Assembly may be located quickly. Relevel, change, check or inspect the structure at any time, easily and effectively.

JICOL ACHNE
with detachable stride level

Berger Jig Collimators are used by plants outstanding for their production efficiency, including:

● HARDMAN TOOL • DOUGLAS • CONSOLIDATED-VULTEE • PRATT & WHITNEY AIRCRAFT • BOEING • LOCKHEED • NORTHROP • NORTH-AMERICAN • CANADAIR LTD. • TURBODYNE • BEECH • AERONCA • RYAN • AND OTHERS.

Leadership **BERGER** *Since 1871*

THIS COUPON BRINGS DATA

C. L. BERGER & SONS, INC. 51031
37 WILLIAMS ST.
ROXBURY, BOSTON 19, MASS.
Send Literature on TRANSITS ☐ LEVELS ☐
ALIDADES ☐ COLLIMATORS ☐

Name .....
Title .....
Company .....
Address .....
City ..... Zone ... State .....

ENGINEERING NEWS-RECORD

ABP Member ABC

Volume 146 MAY 10, 1951 No. 19

WALDO G. BOWMAN
Editor

FEATURES IN THIS ISSUE

The French touch in dams.....W. G. Bowman 28

Found: A sewage works the village can afford.....G. H. Ellis 35

Saving $75,000 on floor costs..... 39

Simple prestressing system for bridge..... 40

Perspective—Letter from Guadalajara..... 132

DEPARTMENTS

Construction Week	17	Foreign	58
Scoreboard	19	Men and Jobs	65
Editorials	21	Education, Research	73
News of the Week	23	Meetings	77
Notes on Legal Decisions	37	Obituaries	78
Book Reviews	43	Construction Business	81
Reader Comment	47	Material Prices	85
Municipal	48	Construction Reports	90

New Products 119

Number of copies of this issue printed 47,556

Managing Editor—Eugene E. Halmos, Jr.

Associate Editors—*New York*, V. T. Boughton (senior associate), R. H. Dodds, F. S. Merritt; *Chicago*, J. R. Carr; *San Francisco*, L. L. Wise; *Washington*, V. B. Smith.

Assistant Editors—*New York*, Melvin Dean, Arthur J. Fox, Jr., T. D. MacGregor, D. E. Reilly.

Staff Assistants—Mary Kiernan, *Research*; Ethel Lyon, *Makeup*; Leo Tarpey, *Printing*; Louise Barker, Madalene Smith, *Editorial*.

Business News—Elsie Eaves, *Manager*, E. M. Huber, Ruth Meyer, J. A. Mahoney, M. W. Roessler, M. Wetzel.

Contributing Editor—N. A. Bowers.

Domestic News Bureaus—Atlanta, Chicago, Cleveland, Detroit, Houston, Los Angeles, San Francisco, Washington. Correspondents in 71 cities in the United States, Canada and Mexico.

Foreign News Bureaus—London, Frankfurt, Paris, Moscow, Tokyo, Bombay, Melbourne, Rio de Janeiro, Mexico City, *Correspondents*—Athens, Rome, Caracas, Buenos Aires, Santiago, Shanghai, Zurich, Johannesburg and 40 other cities.

ROBERT F. BOGER
Publisher

May 10, 1951 ENGINEERING NEWS-RECORD Vol. 146—No. 19

Member ABC and ABP

Published weekly by McGraw-Hill Publishing Company, Inc., James H. McGraw (1860-1948), Founder. **Publication Office, 99-129 North Broadway, Albany 1, N. Y.**

Executive, Editorial and Advertising Offices: McGraw-Hill Building, 330 W. 42nd St., N. Y. 18, N. Y. Curtis W. McGraw, President; Willard Chevalier, Executive Vice-President; Joseph A. Gerard, Vice-President and Treasurer; John J. Cooke, Secretary; Paul Montgomery, Senior Vice-President, Publications Division; Ralph B. Smith, Editorial Director; Nelson Bond, Vice-President and Director of Advertising; J. E. Blackburn, Jr., Vice-President and Director of Circulation.

Subscriptions: Address correspondence to Engineering News-Record—Subscription Service, 99-129 N. Broadway, Albany, N. Y., or 330 W. 42nd St., New York 18, N. Y. Allow ten days for change of address.

Please indicate position and company connection on all subscription orders.

Single copies 35¢. Subscription rates—United States and possessions, $6.00 a year; $9.00 for two years; $12.00 for three years. Canada, $8.00 a year; $12.00 for two years; $16.00 for three years. Pan American countries, $10.00 a year; $16.00 for two years; $20.00 for three years. All other countries, $20.00 a year; $30.00 for two years; $40.00 for three years. Entered as second class matter October 29, 1936, at the Post Office at Albany, N. Y., under Act of Mar. 3, 1879. Printed in U. S. A. Copyright 1951 by McGraw-Hill Publishing Co., Inc.—All Rights Reserved.

A REPEAT ORDER *is the Result of Performance*

THIRTY-NINE repeat orders demonstrate a lot of performance — and it must have been satisfactory performance too.

Brown & Root, Inc., know equipment. They can have any Shovel, Crane, Dragline or Pullshovel they want — and they have bought their fortieth Northwest.

They have had them in light digging and heavy (the one in the picture is digging *granite*).

Add it up for yourself! A Shovel can be a real source of profit or a colossal headache and there is a lot more than the price you pay to be considered. The experience of Northwest users is the best guide there is and when outfits like Brown & Root, Inc., put their money on Northwest you can be sure Northwests will make money for you. Plan ahead now and follow the Northwest Crowd.

NORTHWEST ENGINEERING COMPANY
1502 Field Bldg., 135 South LaSalle Street, Chicago 3, Illinois

39 REPEAT ORDERS

BROWN & ROOT, Inc.
HOUSTON, TEXAS
buy their fortieth
NORTHWEST

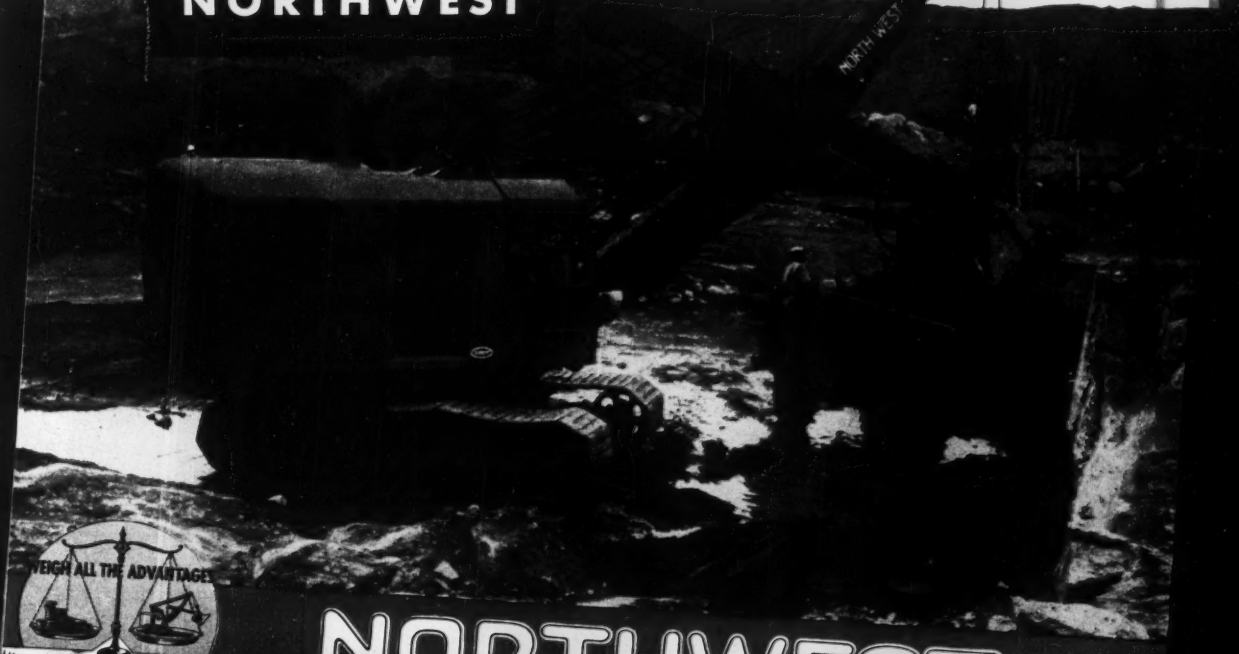

WEIGH ALL THE ADVANTAGES

NORTHWEST

CRAWLER and TRUCK MOUNTED SHOVELS • CRANES • DRAGLINES • PULLSHOVELS

C TOURNAROCKER boosts production 38% for McGraw Construction

In dump position, back end of Rocker body is below rear wheels . . . bowl rests on edge of bank . . . loads dump clear. Drive wheels are always on firm ground.

NEW . . . C Tournarockers now have 18-ton body increasing capacity by 12½%. Prime movers with Tournamatic transmission and torque converters are also available, as well as the "Roadsters" with their heavy-duty, truck-type transmission. Performance figures reported here were made with earlier 16-ton Roadster units.

Here's another time study from McGraw's records: During a 26½-hour period, the C Tournarocker hauled 1844 cu. yds. of slag over 2500' one-way distance. That's 69.6 pay yards per hour.

Tournarocker—Trademark Reg. U.S. Pat. Off. C146b

On steel mill expansion in southern Ohio, McGraw Construction Company, Inc. of Middletown had 200,000 cubic yards of slag to move from new building areas. Material was shovel-loaded into 2 conventional 15-ton dump trucks and one 16-ton, rear-dump C Tournarocker . . . then hauled about half a mile for use as railroad fill. Contractor's records, covering a period of 1080 working hours, show the Tournarocker delivered 4618 loads, or 59,430 cubic yards . . . an output 38% greater than either of the 2 trucks. Both trucks were loaded by the same 1½-yd. shovel and worked the same haul and the same length of time as the Tournarocker, yet one moved only 43,000 yards; the other, 41,800 yards. Of the 144,230 yards placed on the fill by all 3 haul units, Tournarocker handled 41% . . . the first truck, 30% . . . the second truck, 29%.

5000' cycle every 12 minutes

On a typical 2500-ft. one-way haul, the high-speed "C" delivered 13 pay yards of slag every 12 minutes. That's 5 loads . . . 65 cubic yards hourly . . . or about 120 tons of the 3700-lb. material per hour for McGraw Construction Company's LeTourneau rear-dump hauler.

Superintendent Frank Conner stressed high mechanical efficiency and exceptional mobility as the main reasons for Tournarocker's greater output. "The unit has been 95% efficient," he said. "Its small turning radius (13'9") was a decided advantage on the fill. No widening or turn-around expedients were necessary."

Consider what this fast-hauling ability can mean on *your* job. Get all the facts . . . write or ask your LeTourneau Distributor about 35 m.p.h. Tournarocker TODAY.

R. G. LeTOURNEAU, INC. PEORIA, ILLINOIS

HIGH-SPEED, RUBBER-TIRED EXCAVATING • HAULING • LIFTING EQUIPMENT

LETOURNEAU LET EQUIPMENT

MURPHY DIESEL

dependability and responsiveness...

...means plenty of air when you need it!

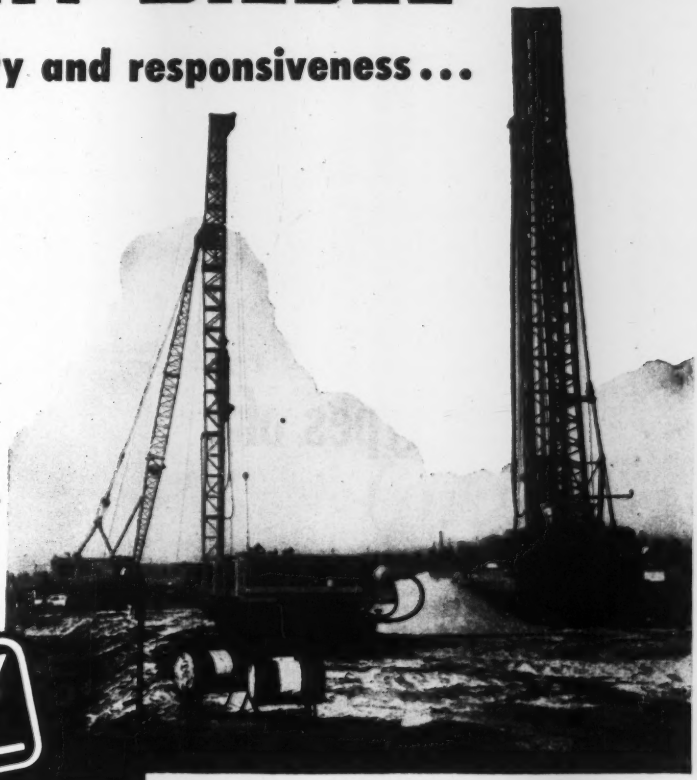

MURPHY DIESEL

Heavy duty power

for construction

Murphy Diesel Engines and Power Units for construction, 90 to 226 H.P., 1200 and 1400 RPM. Generator Sets, 60 to 140 K.W.

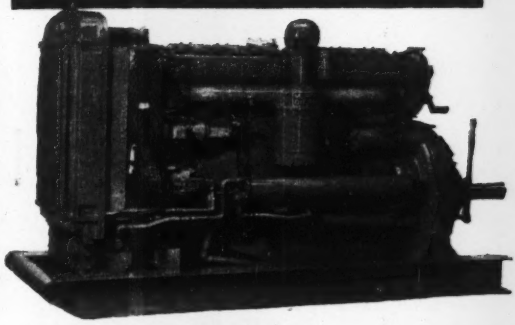

"Plenty of air when you need it" requires "plenty of power" and it has to be the right kind of power . . . dependable, economical and responsive—and that's just the kind you get with Murphy Diesels. The job on which the photograph above was made is a good example of the need for good power and plenty of air. In the salt marshes on the New Jersey Turnpike four Murphy Diesel powered 600 cu. ft. Le Roi compressors supply air used to fill 80 ft. casings with sand under pressure.

Whatever your job, if you want dependable, economical and responsive power it will pay you to find out more about Murphy Diesel Power. Complete information on Murphy Diesel design is given in the booklet *"10 Questions to Ask a Diesel Engine Salesman"*. Ask your Murphy Diesel Dealer for a copy or write direct.

MURPHY DIESEL COMPANY

5311 W. Burnham St. Milwaukee 14, Wis.

Qualified dealers throughout the nation

Only the TIMKEN Company offers

all 3

types of

Rock Bits



and a complete Rock Bit Engineering Service!

WHICH type of rock bit is best for your particular job? If you want an impartial answer, go to an unbiased source—the Timken Company. We're the only manufacturer who has no axe to grind for any one type—because we make *all three* types of rock bits:

From top to bottom above—

1. **MULTI-USE**—gives lowest cost per foot of hole when full increment of drill steel can be drilled and when control and reconditioning of bits are correct.
2. **CARBIDE INSERT**—for extremely hard and abrasive ground. Drillers spend less time changing bits.
3. **ONE-USE "SPIRALOCK"**—for use where reconditioning is impractical or undesirable. Lowest unit cost. Has revolutionary new "Spiralock" union.

You'll get qualified help in selecting the bit you need, too. The Timken Company alone offers you a complete Rock Bit Engineering Service—with the world's largest rock bit field organization, backed by more than 17 years' experience.

FREE BOOKLET! Shows and describes full line of bits. A helpful guide to rock bit buying. Write on your company letterhead to The Timken Roller Bearing Company, Rock Bit Division, Canton 6, Ohio. Cable address: "TIMROSCO".

TIMKEN

TRADE-MARK REG. U. S. PAT. OFF.

your best bet for the best bit
... for every job

MACK TRUCKS... for All-Out Effort

● Today's all-out effort in National Defense and civilian supply places an ever-increasing strain on truck equipment. Fact is, up to 75% of all incoming and outgoing materials at the nation's defense plants are now hauled on motor trucks.

Under such emergency conditions "Built Like A Mack" takes on added significance . . . means trucks that stand up better under the punishing wear and tear of bigger loads and more intensive service.

Wherever they operate . . . in whatever phase of the national economy . . . Mack trucks have one thing in common. Being Macks—they're built to outlast them all—to give *long-lasting* economy and reliability. That's a basic Mack advantage, vitally important during periods of uncertainty when replacements may be difficult to obtain.

Your nearest Mack branch or distributor has the right Mack for your particular line of business—a truck that's built better to give you benefits in low-cost maintenance and peak performance for many years to come.

Mack TRUCKS

. . . outlast them all

Mack Trucks, Empire State Bldg., New York 1, New York. Factories at Allentown, Pa.; Plainfield, N. J.; Long Island City, N. Y. Factory branches and distributors in all principal cities for service and parts. In Canada: Mack Trucks of Canada, Ltd.

Clearing the way for the New Jersey Turnpike, these hustling Macks are giving all-out performance for Geo. M. Brewster & Son, Inc., one of the leading contracting firms in the East.

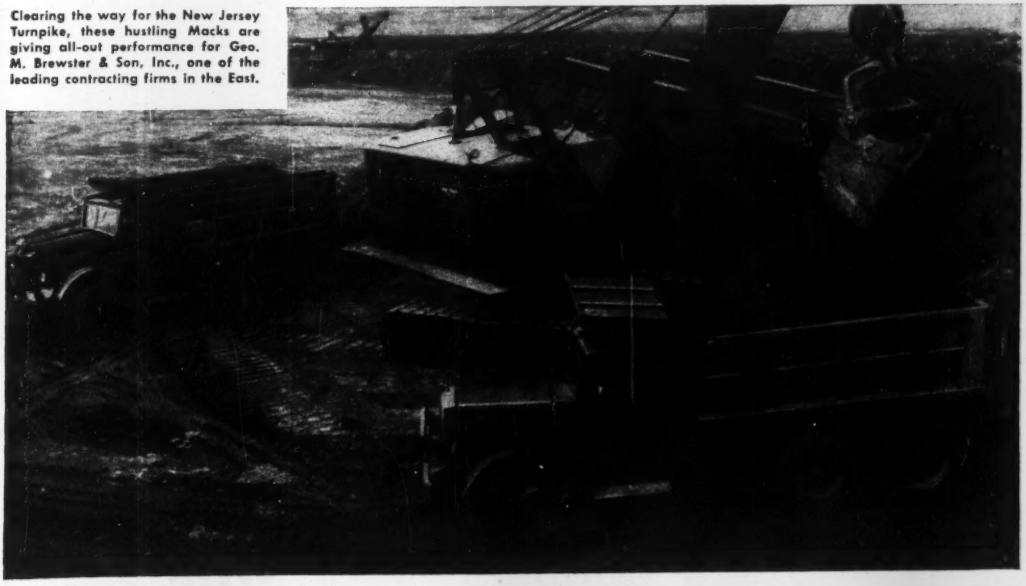

Wilkes-Barre, Pa., Chicago, Denver, Houston, Los Angeles,
New York, Odessa, Tex., Philadelphia, Pittsburgh, San Francisco, Bridgeport, Conn.

ACCO

AMERICAN CHAIN & CABLE
AMERICAN CABLE DIVISION

TRADE MARK

In Business for Your Safety

Tru-Lay *Preformed* **Wire Rope**

NEWS BRIEFS

Nobody loves a sewage plant—Alki Point is an historic spot in Seattle, Wash. The city's founders landed there 100 years ago. Recently it received a new distinction when it was approved by the city council as the site for a sewage disposal plant. At once owners of nearby property rose up and said, "This historic Plymouth Rock of the West Coast belongs to all Seattle, Washington State and the nation, and should not be made into a sewage rookery." However, some said they wouldn't mind giving up their property for a hospital or a sanitarium. City Engineer R. W. Finke, pointing out that only Alki Point has the currents to carry away the diluted sewage, refused to concede that the plant would damage adjacent property. Meanwhile, city officials were saying as little as possible, hoping that the storm would blow over. Now irate citizens seek a city-wide vote.

New use for X-rays—A news item from Portland, Ore., says that X-rays are now being used on logs and heavy timbers to find defects which are hidden from the naked eye by bark and the outer wood.

Distaff contractor—Massachusetts has a woman construction boss and she's easy to look at and get along with too. This slender, dark-haired commander of bulldozer operators, masons, carpenters, electricians, painters and plumbers, is Miss Sarah E. Scenna of Malden. As superintendent of the Alpine Construction Co., she supervises the building of houses cheaper by the dozen. Just now she is working on a project in Fitchburg. She estimates and orders required materials, hires and if need be, fires. She comes from a family of builders. Miss Scenna says men don't mind taking orders from a woman if she knows how to give them. But she is firm about having things done right. "I try to keep the men feeling that they are superior. At the same time I try to earn their respect," she says.

Annexation fight—An internecine legal struggle is going on between Fort Wayne, Ind., (pop. 132,840) and its little neighbor, New Haven (pop. 2,000) to decide which municipality shall annex the valuable East Side industrial area with a tax valuation of $16,000,000. New Haven and Adams Township need the tax base for their consolidated school system, while the big industries located there would prefer the status quo as their present tax

(Continued on page 14)

We can help you Figure Your Savings on any Scaffolding Job

with UNIVERSAL Ezebilt

HORIZONTAL BRACE
SIDE BRACE
PANEL LEG
PANEL SLEEVE
GRAVITY LOCKING TRIGGER
NO NUTS—NO BOLTS
MASON PANEL
Standard SUX panels provide three plank bearing levels. Use of brackets increases working area and allows passageway for hod carriers and wheelbarrows.
CIRCLING
Ezebilt's swivel action makes it especially adaptable for scaffolding cylindrical stacks and other circular structures.

You can figure your savings with the one best scaffold that is unrivaled for ease of assembly and for economy in operation. Ezebilt's exclusive Gravity-Lock feature helps you erect faster—no nuts, bolts or tools required—makes indoor and outdoor scaffolding jobs easier.

Distributors throughout the country—Write for Complete Descriptive Catalog

UNIVERSAL MANUFACTURING CORP.
World's Largest Producer of Steel-Panel Scaffolding
220 NORTH STREET • ZELIENOPLE, (PITTSBURGH DISTRICT) PA.
For Tubular Towers Catalog—Write our AMERICAN TUBULAR ELEVATOR CO. DIVISION

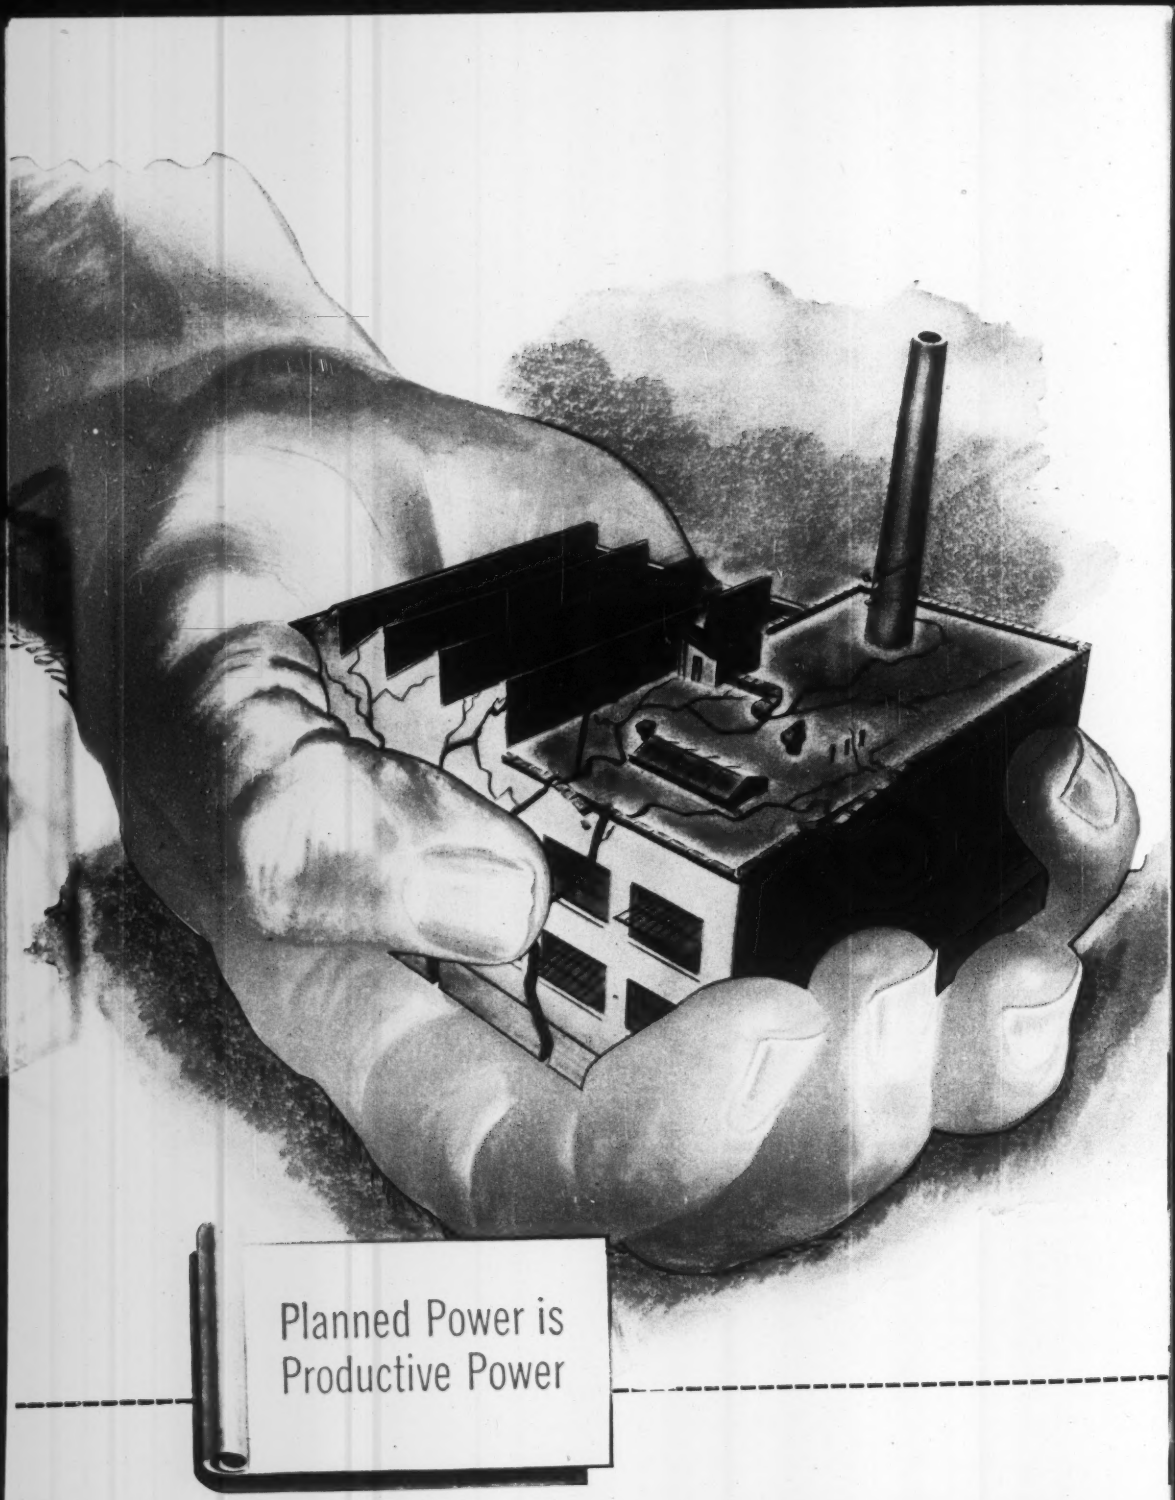
Planned Power is
Productive Power

"Squeezed" Voltage

can throttle production...

Plan power FIRST!

A properly planned distribution system maintains the right voltage to keep production at top level. The vital role of power in industrial plants makes it very important to select the proper system in the first stages of planning for new building or expansion. Adequate power is essential to the efficient operation of the finest engineered production line.

Planning for adequate plant power—present and future—must be a co-ordinated part of the whole planning job. Electrical distribution systems which are superimposed as an afterthought often are costly and inadequate.

Westinghouse engineers can assist you in the critical early stages of selecting an electrical distribution system for your plant. There is "one best" system for any given plant, and our engineers have the skill and experience to help you choose it. They can propose adequate, efficient electrical systems for present *and* future loads . . . at the lowest long-term cost to you.

Our engineers have worked for years to bring new economies and new efficiency to plant power distribution. Take advantage of their knowledge. Get the most out of your power *and* your plant. Call your nearest Westinghouse Office or write Westinghouse Electric Corporation, P. O. Box 868, Pittsburgh 30, Pennsylvania.

I-94890

An Excellent Aid to Distribution System Planning
B-4045 contains fact-filled pages and color diagrams completely explaining the 11 basic systems used in industry today. This booklet will provide a specific answer to your power distribution problems.

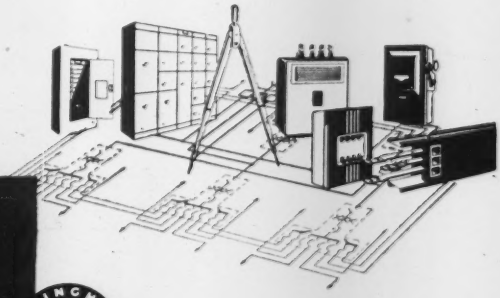

YOU CAN BE SURE... IF IT'S

Westinghouse

WESTINGHOUSE

SYSTEM PLANNING

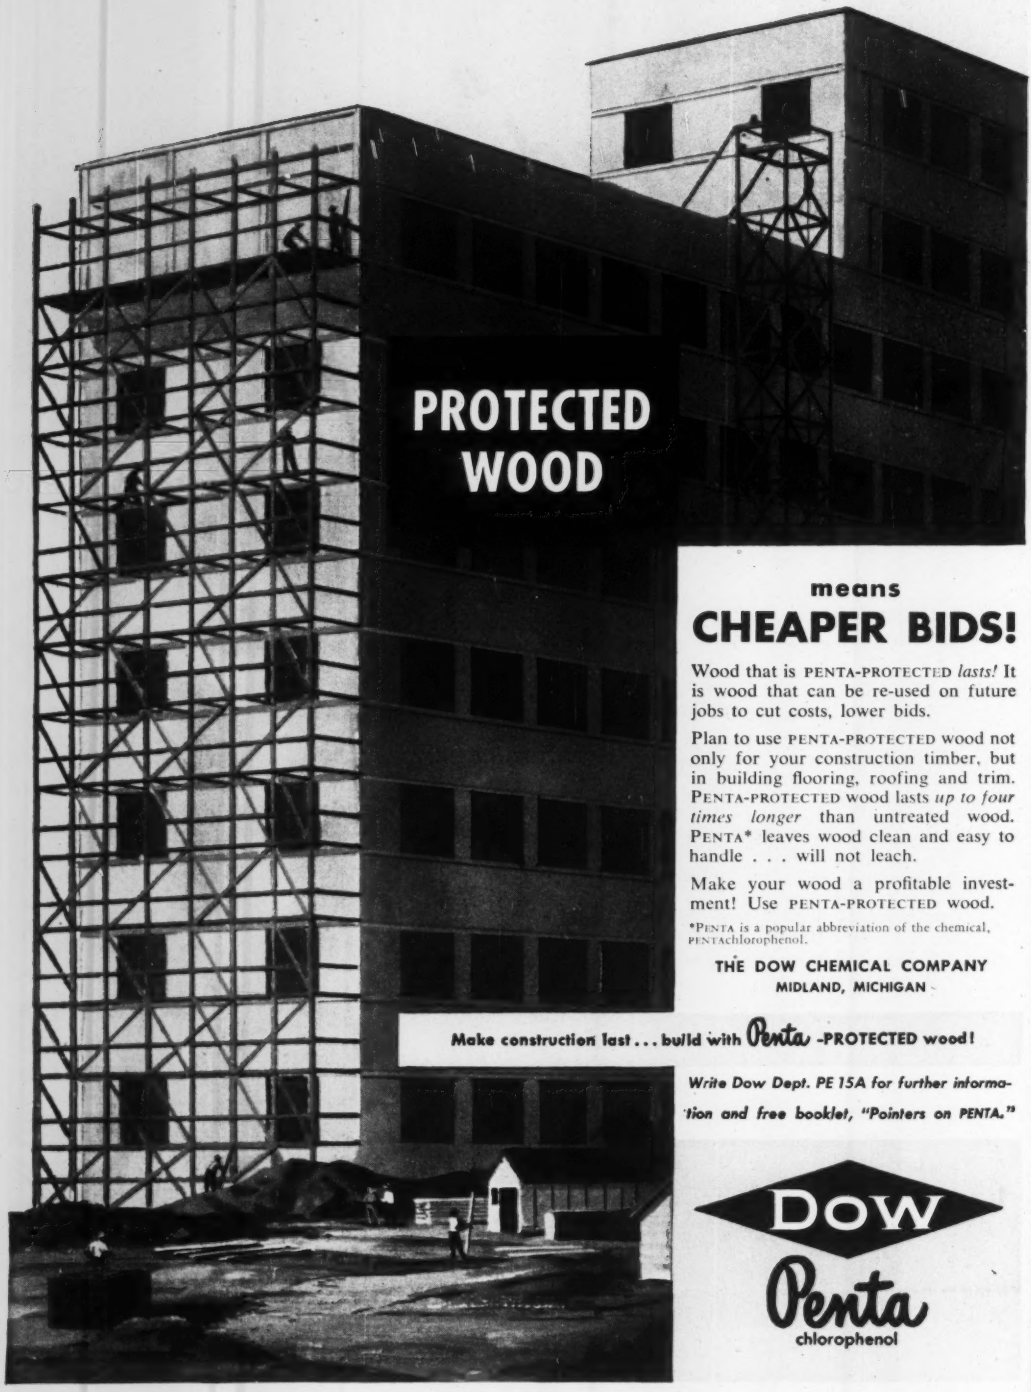

means

CHEAPER BIDS!

Wood that is PENTA-PROTECTED *lasts!* It is wood that can be re-used on future jobs to cut costs, lower bids.

Plan to use PENTA-PROTECTED wood not only for your construction timber, but in building flooring, roofing and trim. PENTA-PROTECTED wood lasts *up to four times longer* than untreated wood. PENTA* leaves wood clean and easy to handle . . . will not leach.

Make your wood a profitable investment! Use PENTA-PROTECTED wood.

*PENTA is a popular abbreviation of the chemical, PENTAchlorophenol.

THE DOW CHEMICAL COMPANY
MIDLAND, MICHIGAN

Make construction last . . . build with Penta -PROTECTED wood!

Write Dow Dept. PE 15A for further information and free booklet, "Pointers on PENTA."

DOW
Penta
chlorophenol

THIS CUSTOMER CHOSE...

LORAIN "TL" on CRAWLER

...and got *these* Features

• Two travel speeds in both directions (standard). • Drop forged treads —stronger, longer life. • 4-way ratchet and pawl tread and travel lock. • "Full-circle" steering with turntable in any position. • Oil-enclosed propelling mechanism — runs in oil bath. • "Packaged" propelling mechanism —removable as a unit. • Drop forged rollers — wearing surfaces heat treated. • Rust-proof tread adjustment — no rust, bind or freeze. • Choice of 3 crawlers — standard, extra long or wide gauge.

THIS CUSTOMER CHOSE...

LORAIN "TL" on RUBBER

...and got *these* Features

• 8 forward speeds — 1 to 33 m.p.h. • Carrier built specially for shovel-crane duty. • Multiple tires for soft ground flotation. • Patented equalizer beams eliminate rear springs. • Heavy-duty air brakes. • Choice of 4 or 6 wheel models — 2 or 3 axles. • Choice of 4 or 6 wheel drive • Built by the originators of rubber-tire cranes. • Choice of 15 or 10 ton capacities. • Extra-wide track units for maximum lifting capacity on rubber. • Single-engine, Self-Propelled models also available.

BOTH CHOSE THESE FEATURES

TL

- A modern idea in Turntable design — with these features:
- *A complete package, all essentials included, no extras to buy*
- *Interchangeable "packaged" components — such as engine, clutch shaft, cab, etc. — individually removable and interchangeable*
- *5 identical clutches with interchangeable parts*
- *A one-piece, all-welded, all-steel turntable bed*
- *Oil-enclosed cut gears*
- *Interchangeable parts*
- *Anti-friction bearings*

. . . plus many more your Thew-Lorain Distributor will point out in action. Ask him for a "TL" job visit!

THE THEW SHOVEL CO., LORAIN, OHIO

THEW LORAIN TL

See Your Distributor for Full Facts

For Drawings That Won't Get 'EDGY' With Age...

Specify Arkwright Tracing Cloth! Then you can be sure that no matter how often a master drawing is yanked out of the cabinet, it will never become ripped, or paper-frayed around the edges to spoil your work.

Arkwright Tracing Cloth is the best insurance you can get that your drawings will never go brittle, discolor or become opaque with age. Best insurance, too, that original drawings are always sharp, clean and ghost-free. Erasures on Arkwright cloth re-ink without feathering. And every roll is carefully inspected for pinholes, thick threads or imperfections of any kind.

All good reasons for you to remember: if a drawing is worth saving, put it on Arkwright Tracing Cloth. Would you like a sample? Write Arkwright Finishing Company, Providence, R. I.

ARKWRIGHT
Tracing Cloths

AMERICA'S STANDARD FOR OVER 25 YEARS

rate is $1.84 as against a current Fort Wayne rate of $4.00. So those are the reasons for various legal developments in the Allen County Courts.

Man of one idea—The lifelong ambition of one Japanese finally has resulted in a tunnel being built through a mountain in the middle of Saka village, Hiroshima prefecture, Japan. Tamekichi Une, 61, had the tunnel in mind when he left Saka village at the age of 16 to make his fortune in Hawaii. He returned to the town in 1949 and contributed his entire savings, $28,000, to the project. Other villagers were so moved they volunteered their services and worked with Une to build the tunnel to facilitate transportation and traffic. It was completed March 25.

New England tradition—An old-fashioned covered wooden bridge was torn down in Sheffield, Mass., recently as unsafe. But residents there wanted to preserve an old New England tradition. So they are going to build a new bridge of just the same type as the old one.

Mandatory parking facilities – New legislation planned by the government of Ontario will permit municipalities to require owners of business buildings to provide off-street parking facilities.

Grand Coulee's predecessor—Man is about to do what nature stopped doing many thousands of years ago—send water flowing through the Grand Coulee in Eastern Washington. The Coulee is the ice age channel of the Columbia River, which now flows some distance to the west. It was carved when giant glaciers formed an ice dam across the river in the same place where Grand Coulee Dam is now. As the glaciers melted, the river returned to its present channel and the ice age channel was stranded high and dry. As the Bureau of Reclamation prepares to pump water into the gorge, it has invited five nationally-known geologists—William Herbert Hobbs of the University of Michigan, Richard Foster Flint of Yale, J. Harlen Bretz of the University of Chicago, Charles Campbell of Washington State College and Ernst Antevs of Globe, Ariz.—to give their opinions as to the length of time since the river was diverted from the gorge. Water will be pumped 280 ft out of the reservoir behind Grand Coulee Dam into the Coulee, 27 mi long. Beginning next year, canals from the lower end of the Coulee will deliver the water to the dry sagebrush lands of the Columbia Basin project, ultimately to 1,029,000 acres.

Construction Men
LOOK UP TO . . . . . .

OWEN
The Universally Popular
BUCKETS

for MAXIMUM CLOSING POWER
for GREATER PENETRATION
for CAPACITY LOADS & PROPER BALANCE
for RAPID, COMPLETE DISCHARGE OF ALL MATERIALS
"A mouthful at every bite"

• Yes, ON THE JOB Construction men all over the world are SOLD on OWEN BUCKETS for excavating, material handling, dredging, etc. Standardization on OWENS is common practice, but proven wise practice.

• If our catalog isn't in your files or on your desk, just drop us a line and we'll dispatch your copy to you promptly.

THE OWEN BUCKET CO.
6019 BREAKWATER AVE. • CLEVELAND 5, OHIO
Branches: New York, Philadelphia, Chicago, Pittsburgh, Cleveland

Use JOY AIR-POWER and TOOLS

for all-around best performance

ON THE JOB

JOY Portable Compressors and "Silver Streak" Air Tools make a highly efficient, time-and-money-saving team—the most modern units you can put on the job. They're light, compact and easy to handle, yet ruggedly built for real heavy-duty service. JOY Portables are available in seven sizes, ranging in capacity from 60 to 630 CFM at standard pressure. JOY Air Tools feature the exclusive "Dual Valve" that makes air do more work, plus cadmium plating for better lubrication, closer tolerances, and prevention of rust and scoring. • Let us show you how JOY equipment can reduce your costs, and produce more work per man-hour. *Write for bulletins, and ask for an actual demonstration.*

PORTABLE COMPRESSORS





SHEETING DRIVERS

JOY Q-81, an adaptation of the K-81 for driving wood or light steel sheeting.



BACKFILL TAMPERS

JOY C-35, an easy tool to handle, yet delivers powerful blows for faster tamping.

SPADERS

JOY M-2, a light tool for digging in clay, shale, hardpan, or hard-frozen ground.

Consult a Joy Engineer

W&D C2060

JOY MANUFACTURING COMPANY

GENERAL OFFICES: HENRY W. OLIVER BUILDING · PITTSBURGH 22, PA.

IN CANADA: JOY MANUFACTURING COMPANY (CANADA) LIMITED, GALT, ONTARIO

THE CONSTRUCTION WEEK

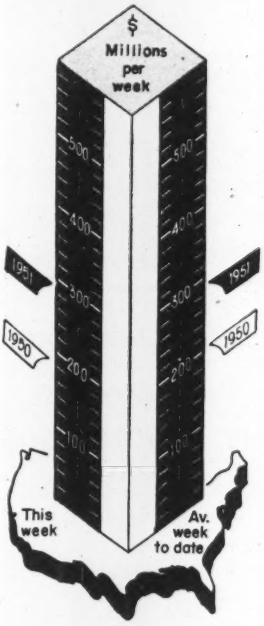

Amount of contracts let

	Week of May 10 '51	Cumulative 19 wks 1951	1950	% chge
Federal	$29.1	$826.2	$530.0	+56
State & Mun.	90.9	1,337.6	1,139.6	+17
Total Public	$120.0	$2,163.8	$1,669.6	+30
Total Private	174.8	3,399.4	2,244.5	+51
U. S. Total	**$294.8**	**$5,563.2**	**$3,914.1**	**+42**

(Other figures of the week, and ENR Index numbers, p. 103)

PNYA LEASING WITHIN LAW?—New York's Port Authority lawyers are busy studying legal angles after real estate interests yelped loudly over PNYA's plans to build and lease general industrial buildings at three metropolitan area airports. PNYA, reaching desperately for revenue-producing facilities to make the airports self-supporting, already gets revenues at the airports from drug stores, newsstands, a bank, beauty parlors. It sees no reason why it shouldn't bring commercial enterprises into leased buildings on the airports. Realtors center their attacks on provisions in the agreements by which PNYA operates the airports, noting that the fields are to be operated for "public purposes."

FUEL FOR FIXED-FEE FIGHT—Impending court action over the New Jersey Turnpike Authority's award of a $7,700,000 cost-plus contract for administration building, restaurants and service facilities (ENR May 3, p. 27) got some added fuel, when the Public Buildings Contractors Association, Inc., a New York group, announced it was "in complete accord" with the protest against the contract award. The Turnpike Authority told a state legislature committee that it was exempt from state rules prohibiting cost-plus contracts. Legislators refused a decision, said the matter was up to the courts. Said H. L. Fischer, president of PBCA: "We want to make our views known. The legality of such action must be challenged. . . . The excuse that . . . a rigid completion schedule dictated . . . the award . . . is refuted . . . by the fact that all other contracts . . . were let as required by New Jersey law. . . . The right of authorities to deviate from accepted legal methods of awarding contracts should be challenged."

QUICKIE FIRMS—Rumors are beginning to be heard of defense construction contracts being given to architect-engineer and contracting firms hurriedly formed for the purpose. At this early stage in the game, when many established companies have not yet been utilized, this spells trouble on the inflation front—according to those with memories of the 1940 defense buildup. The new firms need manpower. The best and easiest place to get it is from existing organizations (at a premium) and construction costs consequently are forced to go up. If the quickie firms lack experience and know-how—as they sometimes do if they stem from political pull—the costs and troubles are apt to be compounded. So say people with memories of the not-too-long-ago.

ATOMIC CONSTRUCTION INSPECTION—To correct what it called a "startling weakness" in the construction program of the Atomic Energy Commission, the House Appropriations Committee has urged AEC to hire engineers and architects to check the work of private firms that design and build its projects.

TOLL ROAD GROUP WOULD HAVE GREAT POWERS—Missouri legislators are considering a bill that would put a plan for a system of toll roads before the voters at a general election. The turnpike authority proposed would be managed by a bipartisan commission appointed by the governor. The authority would have—among other powers—the right to order the discontinuance or relocation of any highway that might affect the construction or operation of a turnpike.

WORCESTER — Shrewsbury St. at intersection with Envelope Terrace. Built in 1921. Photos 1922 and 1950.

SHAWSHEEN VILLAGE (above)—Haverhill Street near Route 28. Built 1923. Photos taken in 1924 and 1950.

BOSTON—Commonwealth Avenue just west of Summit Street. Built 1923. Photos taken in 1924 and 1950.

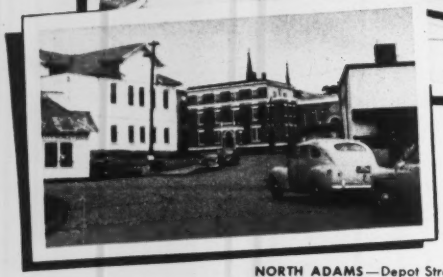

NORTH ADAMS—Depot Street Built in 1920. Photos taken 1922 and 1950.

Here today – *and still here tomorrow*

. . . that's the story of

Massachusetts' *CONCRETE* Streets

Massachusetts—the state that gave our nation many of its most cherished traditions—also can cherish its time-honored concrete streets. Many of these fine old pavements, having served for more than a quarter of a century, are still in good condition and ready for many more years of hard use.

The experience in Massachusetts is typical, for all over America there are countless concrete pavements that have given a generation or more of dependable service. Public officials, motorists and taxpayers again and again have found that paving streets and highways with concrete is a good investment in the future. Concrete is reasonable in first cost and it serves far longer with less maintenance. The all-important result: ***low annual cost.*** With concrete pavements it's truly a case of "here today —*and still here tomorrow*."

Concrete also is safer. Wet or dry, night or day, concrete's gritty texture provides uniformly high skid resistance while its light color helps reduce accidents by reflecting more light at night. Send for a free copy of "*Concrete for Modern Streets.*" It is distributed only in the U. S. and Canada.

PORTLAND CEMENT ASSOCIATION

Dept. A5b-17, 33 West Grand Avenue, Chicago 10, Illinois

A national organization to improve and extend the uses of portland cement and concrete through scientific research and engineering field work

MAY CONSTRUCTION SCOREBOARD

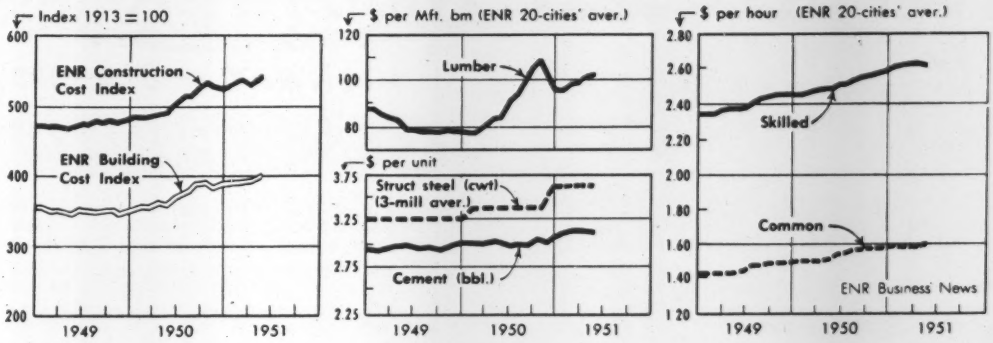

ENR INDEXES (1913 = 100)	May '51	Apr. '51	% Change	May '50	% Change
Construction Cost	543.90	538.69	+0.9	496.55	+ 9.5
Building Cost	402.07	398.78	+0.8	364.27	+10.3
Material Prices (20-cities' average)					
Cement, bulk, per bbl	3.153	3.148	+0.2	2.961	+ 6.5
Structural Steel, (3-mill aver.), per cwt	3.650	3.650	0.0	3.400	+ 7.3
Sand, per ton	2.093	2.090	+0.1	1.968	+ 6.3
Lumber, 2x4 Fir, per M. ft. bm	111.843	111.500	+0.3	93.266	+19.9
Lumber, 2x4 Pine, per M. ft. bm	96.950	96.316	+0.6	80.666	+20.1
Common brick, per M	31.275	31.175	+0.3	28.087	+11.3
Ready-mixed concrete, per c. y	10.900	10.925	−0.2	10.318	+ 5.6
Structural Clay Tile, 3x12x12 per M	143.964	143.339	+0.4	132.900	+ 8.3
WAGE RATES (20-cities' average)					
Common	1.608	1.595	+0.8	1.511	+ 6.4
Skilled (aver. 3 trades)	2.629	2.619	+0.4	2.485	+ 5.8
Bricklayers	2.900	2.895	+0.2	2.756	+ 5.2
Structural Ironworkers	2.581	2.568	+0.5	2.450	+ 5.3
Carpenters	2.408	2.393	+0.6	2.249	+ 7.1

CONTRACTS AWARDED (thous.)	April 1951	April 1950	% Change	Four Months 1951	Four Months 1950	% Change
Total U. S. (ENR reported)	$1,053,434	$885,044	+ 19.0	$4,997,847	$3,480,193	+ 43.6
Private	558,498	549,861	+ 1.6	3,058,081	2,013,361	+ 51.9
Public	494,936	335,183	+ 47.7	1,939,766	1,466,832	+ 32.2
Federal	230,076	55,741	+312.7	763,263	470,908	+ 62.1
ENR Constr. Volume Index, '13 = 100	515	484	+ 6.4	598	455	+ 31.4
NEW CONSTRUCTION CAPITAL						
Total	476,847	299,653	+ 59.1	4,312,082	1,406,765	+206.5
State & Municipal Bond Sales	296,072	147,219	+101.1	966,432	811,579	+ 19.1
Corporate Security Sales	180,775	152,434	+ 18.6	669,765	595,186	+ 12.5
Federal (non-federal work)				73,425		
Federal (federal work)				2,602,460		

MATERIAL SHIPMENTS & LABOR SUPPLY	February (F) March (M) 1951	1950	% Change	Two Months (2) Three Months (3) 1951	1950	% Change
Cement, thous. bbls., Bu. of Mines	11,294(F)	9,824(F)	+14.9	23,531(2)	19,456(2)	+20.9
Fabr. Struc. Steel, thous. tons, AISC	195(M)	157(M)	+24.2	541(3)	422(3)	+28.1
Lumber, mil. ft. bm., NLMA	2,884(F)	2,865(F)	+ 0.6	6,083(2)	5,498(2)	+10.6
Lumber Prod., mil. ft. bm., NLMA	2,763(F)	2,463(F)	+12.2	5,768(2)	4,850(2)	+18.9
Contract Constr. Employ., thous. BLS	2,314(M)	1,907(M)	+21.3	(Av.) 2,262(3)	(Av.) 1,896(3)	+19.3

for LARGER PROFITS and BETTER RESULTS IN EVERY PHASE OF CONCRETE PAVING!

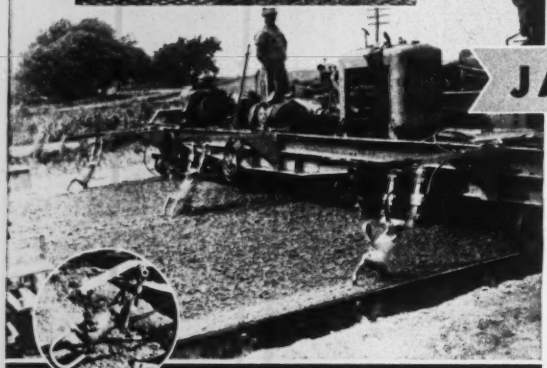

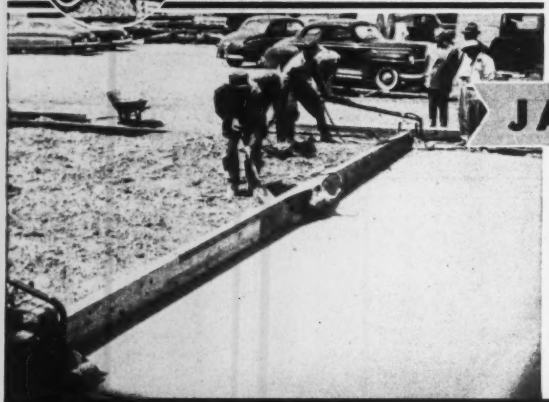

HIGHWAY and AIRPORT

JACKSON VIBRATORY PAVING TUBE

The JACKSON Paving Tube, which is quickly attached to any standard finisher, provides full width internal vibration through full depth of the slab. The harsher mixes are readily made plastic. Important savings in cement can be made, or important gains in compressive strength and durability achieved when no cement reduction is made. Spreading costs are reduced, finishing progress is much more rapid, complete compaction is accomplished and concrete is perfectly puddled at side-forms and joints. It is adaptable to slabs 6" to 24" thick and quickly adjustable from 10' to 25' widths, in the field. May also be attached to standard spreaders for vibrating the first course in thick slab construction. Write for complete details.

JACKSON SIDE FORM VIBRATOR

Eliminates manual vibrating of concrete at side forms. Saves the better part of two men's labor. Mounts on any modern finisher, Jackson Vibratory Paving Tube or Spreader. Employs two or more vibratory units which are simultaneously lowered into or raised from the concrete by the finisher operator. Units operate close to forms or reinforcement, ride over any obstruction without fouling. Will not penetrate into sub-base. Assures thorough compaction regardless of speed of finisher, no spots missed. Long-wearing, trouble-free. Write for complete facts.

MUNICIPAL PAVING - BRIDGE DECKS HIGHWAY WIDENING and PATCHING, etc.

JACKSON VIBRATORY SCREED

Strikes off to any crown, undercuts at curb or side-form, works right up to and around manholes and other obstructions. With it center joints may be eliminated and full widths (up to 30') poured. Requires only two men on widest slab, due to strong tendency to propel itself. It's the only screed that can be rolled back on 4 rollers for second pass. Contractor has only to secure plank cut to proper length and crown to be set for any job. Powered by Jackson 1.25 KVA Portable Power Plant. Most productive, most versatile of all screeds. Write for details.

VIBRATORS for every type of concrete construction FOR SALE or RENT at your Jackson Distributor.

ELECTRIC TAMPER & EQUIPMENT CO.
LUDINGTON - - - - MICH.

Emotional economy

In recommending that the budget of the Construction Statistics Division of the U. S. Bureau of Labor Statistics be cut from $655,000 to $150,000, the subcommittee of the House Appropriations Committee let its zeal for economy obscure its judgment. Such a deep cut, if based on careful study of the situation, suggests that the subcommittee felt that the Construction Statistics Division should be abolished, but didn't have the courage to recommend it. A more likely explanation is that this is merely an example of economy by emotion—cut something to make a showing.

The construction information provided by the Bureau of Labor Statistics is widely used by residential builders, materials producers and suppliers, financing institutions and retailers of home furnishings and appliances. Such information—the number of new dwellings coming on the market, how they are financed, what they cost, what materials are being used—is not available elsewhere. Suddenly to remove this source of business guidance would hardly be in the public interest.

Whether the $655,000 budget is too large is another question. Government bureaus have a tendency to grow—they neither die nor fade away—and statistical operations particularly can be carried on and expanded ad infinitum. But to cut the budget of any agency 75% demands that the decision be backed up by careful study and definite conclusions. There is no evidence that the House Appropriations subcommittee cut the construction statistics budget other than on the shallow excuse that it served as a good and politically harmless place to cut.

Road prospects brighter

Prospects for a satisfactory year of road construction and rehabilitation have brightened greatly in the past few weeks. Contracts let during the first three months of 1951 totaled $267 million, which is $5 million above last year's lettings to the same date. Moreover, the Defense Production Administration has just announced that 151,000 tons of steel will be made available to the Bureau of Public Roads for June allotments, as it was in May. If steel allotments continue to be made at this monthly rate they will add up to the 1,800,000 tons estimated by the Bureau of Public Roads as necessary for an effective road-building program this year.

Even more encouraging is the belief in Washington that the top men in the Defense Production Administration are convinced that better highways are essential to the defense program, and that a sustained high annual rate of road building is needed. Also, neither the DPA nor the Department of Defense favors any relaxation of the strict limits on truck overloads set up last December, despite what appear to be persistent efforts on the part of the representatives of trucking interests within the Defense Transportation Administration to get those controls relaxed. During World War II, great damage was done by needless overloading of trucks under the excuse that it was essential to the war effort. That mistake will not be repeated this time if the control system set up last December can be maintained.

Belt tightening unavoidable

Engineers who are going ahead with plans calling for an early start on work not closely connected with the defense program should read carefully a recommendation sent to the nation's bankers by the Voluntary Credit Restraint Committee of the Federal Reserve Board. Stating that the money sought by industries of the country for new plant and equipment has reached the enormous total of $24 billion dollars, the committee tells the bankers to tighten up on loans unrelated to defense. Here is a straw in the wind, if there ever was one.

This $24 billion in plant expansion is 29% above last year's figure. When that fact is set against the announcement that under the Controlled Materials Plan all but 15% of the nation's steel output may be allocated to defense-rated work, it seems obvious that construction not related to defense has a rough road ahead. Already the pinch is being felt. In New York City, for example, school construction is practically at a standstill for want of steel.

The suggestion in these pages (ENR March 22, p 13) that pollution-control agencies review the orders they have issued calling for early starts on non-defense projects was not well received in some quarters. Yet it was made as a realistic appraisal of a situation that now becomes increasingly clear.

Of course, pollution-control bodies are not the only public agencies that should review their programs. The same applies to plans for public buildings that are not absolutely essential, to parkways, to channels or harbor works, to flood-control and irrigation and to power projects that cannot be brought into service for several years.

If every public agency sits back to wait for someone in Washington to make the decision, the confusion by late summer is going to be appalling. Here is an opportunity for engineers to demonstrate that they do take a more objective view of questions of this kind. By urging the organizations of which they are a part to act now they should have the satisfaction of knowing that they had a part in avoiding an impossible-to-meet demand for scarce materials that must come before the end of the year.

Better for paving work

Less mixing water is needed for a given slump in concrete made with Duraplastic air-entraining portland cement. The result is a more workable, more uniform and more plastic concrete that dumps, spreads and finishes easily. And it allows earlier protection for curing.

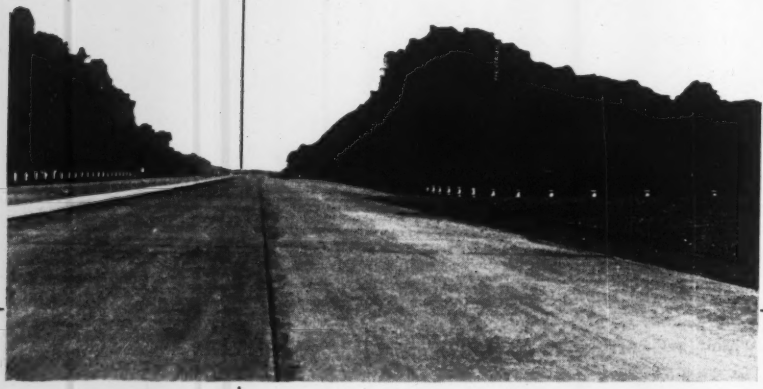

Makes more durable concrete

Duraplastic cement minimizes segregation and bleeding. Thus, concrete is fortified against the destructive effects of freezing-thawing weather and the scaling action of de-icing salts. (Penn-Lincoln Parkway, Allegheny Co., Pa. Duraplastic paving, bridges, underpasses and Atlas White Duraplastic used in white concrete reflecting median dividers. Designed by Pennsylvania Department of Highways. Contractor: Johnson, Drake & Piper, N. Y. Curb by Polselli and Angelucci, Philadelphia.

YET DURAPLASTIC* COSTS NO MORE

It sells at the same price as regular cement and requires no unusual changes in procedure. Complies with ASTM and Federal Specifications. For descriptive booklet, write Universal Atlas Cement Company (United States Steel Corporation Subsidiary), 100 Park Avenue, New York 17, N. Y.

*"Duraplastic" is the registered trade mark of the air-entraining portland cement manufactured by Universal Atlas Cement Company.

ATLAS®

DURAPLASTIC

AIR-ENTRAINING PORTLAND CEMENT

Makes Better Concrete at No Extra Cost

OFFICES:

Albany, Birmingham, Boston, Chicago, Dayton, Kansas City, Minneapolis, New York, Philadelphia, Pittsburgh, St. Louis, Waco.

"THE THEATRE GUILD ON THE AIR"—*Sponsored by U. S. Steel Subsidiaries—Sunday Evenings—NBC Network*

ENR-D-124

ENGINEERING NEWS-RECORD

MAY 10, 1951 VOL. 146 NO. 19

NPA slaps complete controls on all construction work

National Production Authority order demands permits for every type of work—Housing under controls for first time —Put 25-ton limit on steel use

Vincent B. Smith
Washington Staff

Construction got a severe jolt last week. The National Production Authority extended its construction controls to cover every category of public and private work.

Under the agency's new order, no project using more than 25 tons of steel may be started without an NPA permit. (Previously the limit was 50 tons.) There are no exemptions from the all-inclusive licensing requirement. It hits factories, power plants, pipe lines, hospitals, schools and highways, along with every other type of facility.

Since midnight of May 3, when the new rule took effect, any job requiring more than 50,000 lb of steel must get NPA approval before work begins. In figuring the steel total for a job, NPA specifies a long list of products—from structural shapes and reinforcing bars to pipe and nails—enumerated in the agency's iron and steel order M-1.

NPA issued the broad licensing requirement in an amendment of its basic M-4 construction order. Other changes included in the amendment look small by comparison, but they are important.

• **Housing under controls**—Housing is brought under construction controls for the first time. M-4 as amended requires permits for apartment houses over three stories high, above the basement, and for single-family homes that cost more than $35,000 to build. The new restrictions won't be used to hamper ligitimate housing jobs, but apartment house licensing will curb the recent rash of projects designed for easy conversion into hotels or office buildings.

Permits likewise now are mandatory for terminal warehouses and television and radio broadcasting facilities. In a concurrent move last week, NPA also withdrew its exemption of newspaper plants; they are back under the commercial building classification, requiring licenses for construction. Outdoor advertising signs are banned completely; the amendment transferred them from the commercial to the amusement-entertainment list which first came out in the original prohibitory order of Oct. 26, 1950.

• **Misgivings**—Construction leaders greeted the new order with misgivings. The Associate General Contractors of America pointed out that machinery for issuing the permits would have to start functioning promptly if the defense program and essential civilian projects were not to suffer severe delays. AFL spokesmen expressed fear that the order would shrink employment and cause workers to migrate out of places where they will be needed later for defense construction.

In fact, construction people doubted the necessity for the broad extension of controls. This attitude showed up plainly in a meeting of the Construction Industry Advisory Committee with NPA officials on the day before the order was issued. The 20 industry members present passed a resolution opposing any changes that would add restrictions to M-4. There was no reason for imposing more controls, they said.

• **Shortages growing**—Manly Fleischmann, NPA administrator, saw things differently. Explaining the basis for the order, he cited the growing critical shortage of structural steel and overriding need of steel in our defense, defense-supporting, and highly essential civilian programs. The new measures, he said, will regulate and control the distribution of structural steel and steel products used by the construction industry in conjunction with the Controlled Materials Plan.

On CMP, the advisory committee agreed with Fleischmann and his NPA lieutenants. The industry representatives unanimously asked that all construction except private housing be placed under CMP, provided claimant agencies are set up to take care of construction requirements. That's what NPA plans to do (ENR, April 19, p. 23).

Fleischmann expects the new construction controls to start "squeezing some of the water" out of defense and defense-supporting programs even

(*Continued on page 24*)

Forces plan $6.9-billion construction

Cash expenditures for military construction in fiscal year 1952, starting July 1, will amount to $1.9 billion, according to the Defense Department budget submitted to Congress last week by President Truman.

The 1952 figure represents a big increase over the $400-million estimated cash outlay for military construction in the fiscal year now coming to a close.

The $1.9 billion to be expended in fiscal '52 will pay part of the bill for $2.4 billion of military construction already authorized or recommended, plus an additional $4.5 billion soon to be asked for. Added together, the resulting $6.9 billion indicates a heavy carryover of military construction expenditures into fiscal year 1953.

Contract authority already enacted for military construction totals $2.1 billion. Congress has before it a supplemental request for $300 million that is expected to pass soon. Under proposals to be submitted within a few weeks, the military will ask for another $4.5 billion. Congress is expected to approve that request.

• **Distribution**—Out of that $4.5 billion, the Air Force will get $2.5 billion and the Army and Navy $1 billion each. The three services plan to spend $750 million of this construction money during fiscal year 1952. From funds already appropriated and/or in process of approval by Congress, they will spend these additional sums during the same year: Air Force, $600 million; Army, $300 million; and Navy, $250 million. Thus the total cash expenditures for military public works in fiscal '52 are expected to amount to $1.9 billion.

Contract awards will run considerably higher than cash expenditures. With enactment of the additional authority for $4.5 billion of military construction, the three services will attempt to get much of that work under contract during the course of the year.

Construction controls

(*Continued from page 23*)

before CMP takes effect. Steel requirements submitted for both defense and essential civilian programs have been running too high, he believes. Project licensing and CMP together will control the distribution of construction steel and bring requirements into some sort of balance with supply.

• **Highways get less**—It is too early to say what projects will be approved for early construction. Industrial building that does not contribute to the defense effort will certainly be curtailed. The government has repeatedly asked industry to postpone jobs of that kind. In the field of public works, Fleischmann indicated his personal belief that substantial amounts of steel will be made available for hospitals and schools, but "much less than usual" for highway projects.

Chief Mobilizer Charles E. Wilson (director of the Office of Defense Mobilization) has given similar indications during recent months of expected cutbacks in steel for highways. Over the weekend he implied broader curtailment of public works in a letter to governors, mayors and county officials asking them to postpone deferrable projects and to submit proposed borrowings of $1 million or more to the Federal Reserve Board's Voluntary Credit Restraint Committee for clearance.

• **See volume reduced**—Before last week's NPA order came out, construction was headed for a $27-billion year. The new restrictions may reduce the 1951 construction expenditures by a couple of billion—possibly more, depending upon the rigidity with which the restraints are put into application.

NPA's construction advisory group had good reason for opposing the added curbs. In view of the steel industry's capacity to produce structural and reinforcing material, the construction outlook indicated no overtaxing of the potential supply. Under controls in effect before last week, construction spending in the third and fourth quarters of 1951 was expected to drop considerably below last year's figures for the same periods.

But top mobilization officials, looking at the total steel situation, saw the picture in a different light. Now that broader controls have been imposed, construction people will do their part to make the new rules work. They only hope that the processing machinery for handling the large volume of permit applications will be operated promptly and effectively.

Applications for constructing permits under the new order will be made on the same form (NPA F-24) that has been used in applying for commercial building authorizations previously.

Gen. Young quits District as engineer commissioner

Brig. Gen. Gordon R. Young retired last week as engineer commissioner of the District of Columbia. Ill health—plus a recommendation by the physical evaluation board at Walter Reed Hospital—caused him to give up his post seven months before reaching sixty, the retirement age.

His successor will be appointed by President Truman from a recommendation by Maj. Gen. Lewis A. Pick, Chief of Engineers, and approved by Army Chief of Staff Gen. J. Lawton Collins. Meanwhile, the senior assistant engineer commission, Lt. Col. Thomas J. Hayes III, will carry on the duties of the office, as recommended by Gen. Young.

In his five years and nine months as engineer commissioner—the longest term served by an engineer officer in that position since it was created in 1878—Gen. Young assisted the completion of several major projects, including new bridges across the Potomac and Anacostia Rivers, the Whitehurst Freeway, and the du Pont Circle underpass.

He served two years in France during World War I. In the last war he was chief engineer of the Caribbean Defense Command and later commanding general of Fort Belvoir.

Among his earlier assignments with the Corps of Engineers, Gen. Young served as district engineer at Charleston, S. C., Kansas City, Mo., and Norfolk, Va. In the early 1940's, he became department engineer of the Panama Canal, where he was successively district and division engineer.

Price control not clear to equipment companies

Although only an inkling of Price Stabilizer Michael V. DiSalle's new pricing order concerning construction equipment had reached the manufacturers early this week, some in the industry have expressed concern over its workability.

Some manufacturers believe that any attempt at this time to roll prices backward or forward, based on a complicated procedure supposedly included in the new pricing order, basically is unsound and unworkable.

One line of thinking within the industry is that the government can't expect peak production of construction equipment while at the same time requiring the manufacturers to absorb increased production costs.

If the new price controls affecting construction equipment are too restrictive, according to Julian R. Steelman, president of the Construction Industry Manufacturers Association, some manufacturers may find it necessary to cut the volume of their present production back of the 1949-50 levels to keep from suffering a loss.

There appears to be a divergence of opinion among the manufacturers as to what should be done to clear up the current confusion on pricing of equipment. Some believe an all-out effort should be exerted to make any suggested program work. Others think a "hands-off" policy may be best at present, in the belief that confusion will mount so rapidly that appropriate pricing relief will be granted the manufacturers as an incentive for them to operate at peak capacity, limited only by availability of materials.

The construction equipment manufacturing industry, in general, favors any sensible price control that can be adopted under prevailing costs.

Hyland becomes president of the Moles in New York

Richard V. Hyland, of Madigan-Hyland, New York consulting engineers, is the new president of The Moles, an association of New York heavy construction men. He succeeds James F. Salmon, New York manager of the Arundel Corp.

Hyland and M. J. Madigan joined forces in 1929 to form the present consulting firm. At first, they specialized in cost estimates and analyses of public works contracts in the East.

Since the mid-30's Madigan-Hyland has been consultant to such organizations as the New York Central Railroad, Triborough Bridge and Tunnel Authority and the cities of New York and Los Angeles.

AWWA debates national water policy; acts for fair share of short material

Waterworks men review, censure nation's water policy in Miami—See hope of strong claimant agency—Assn. expands fluoride stand

Arthur J. Fox, Jr.
Assistant Editor

Wolman vs. Morris was the main event in Miami last week as the American Water Works Association drew top talent from opposing camps to give national water policy—or lack of it—a lively going-over.

Samuel B. Morris, general manager and chief engineer of Los Angeles' Department of Water and Power, who served on the President's Water Resources Policy Commission, touched the high spots in a quick review of what that group recommended in its three-volume report (ENR Dec. 21, 1950, p. 23).

We must stop and re-examine policies under which present works have been built; and now, while we are at war, is a good time, said Morris.

• **Beyond engineering**—Abel Wolman, Professor of sanitary engineering at Johns Hopkins University, asserting national water policy is not just an engineering problem but one of social philosophy, claimed none-the-less that such policy must have the orderliness that engineers, "the last surviving quantitative Indians in this country," can give it.

The "grant-in-aid philosophy" of today stems from the 1934-42 period of high emotion, last period in which major decisions should have been made, said Wolman. And now, with no single uniform federal policy covering land and water, he stated, expenditures for water supply and water use projects have reached unintelligible dollar totals—more money having been spent in less than four years since 1947 than in the 150 years of prior U. S. history.

"There's a limitation of money. That's an astonishing thing to say," quipped Wolman, as he urged a return to the benefit cost ratio for measuring project feasibility. He warned that desirable local responsibility would be lost in basinwide water resource development under federal agency control; asked that proposed legislation be made public as recommended by the President's commission, now, before drastic alteration by interested federal departments; and pleaded that more attention be given Engineers Joint Council's recommendations to the President's study group (ENR July 6, 1950, p. 21).

• **On claimant agencies**—"How long will the government continue to ignore the waterworks industry and its need for a suitable claimant agency," asked Wendell La Due, Akron (Ohio) water and sewerage superintendent, in opening a session on critical materials and civil defense.

The nearest thing to an answer came from W. J. Orchard, general manager of Wallace & Tiernam Co. and sparkplug in the concerted effort by water, sewage, public health and equipment manufacturer interests to gain recognition of their materials needs.

"We think we know we are, but we don't know," said Orchard in what—although not completely satisfying—was perhaps the most encouraging progress report he has been able to make to date.

Since a fruitless session Jan. 17 with National Production Authority, there has developed competition among Washington claimant agencies wanting to represent water and sewage interests. Water and sewage works people dislike their present tie-in with Housing and Home Finance Agency, claimant only for domestic water supplies, not for domestic sewerage nor for industrial water or waste-disposal plants. And they want no part of any other existing agency, feeling their need vital enough to warrant formation of an independent setup such as the electric utilities Defense Electric Power Administration.

The direct approach to NPA has been swapped for grass roots action. AWWA members and those of the three other cooperating associations have been wiring their congressmen—apparently with result. Another session with NPA reportedly was set for Tuesday of this week. Faith in the ultimate outcome was evidenced in Orchard's statement that some 20 men would be needed to staff the proposed new claimant agency, at salaries $5,800 to near $9,500—suggestions of eligibles are sought.

• **Civil defense**—Waterworks men should handle waterworks problems in planning for civil defense. This was the position taken by J. S. Longwell, Piedmont (Calif.) consulting engineer, in reporting results of a survey made in February by AWWA Secretary Harry Jordan.

Among its findings: Of 48 state and 2 territorial sanitary engineers responding, all but 6 had been given civil defense assignments; 20 said they had waterworks men in CD organizations; 15 are without mutual-aid plans; 45 have had no orders for protective anti-sabotage measures.

• **To fluoridate or not to fluoridate**—A full-house session on fluoridation practices shed but little light on that subject, evidenced some little warmth. The scheduled presentation was mostly a rehash of information already published. The prolonged discussion that followed indicated that feelings on the subject of fluoridation vary widely, as does information.

A Missouri delegate, speaking for his delegation, expressed definite opposition to fluoridation of water supplies; others from elsewhere implied like feelings.

AWWA's general policy committee, however, reaffirmed its 1949 position that where public demand develops and local medical and dental societies approve, state and local health authorities and water suppliers may properly participate in fluoridation programs. It added that recommendations of fluoridation are the prerogative of health groups; after approval, it is up to the waterworks industry to follow through willingly and intelligently where proper controls are assured.

A. E. Berry assumed AWWA's presidency for 1951-52 (ENR Apr. 26, p. 29). Honorary memberships went to C. R. Cox of the New York State Health Department, S. B. Morris and S. S. Powell, Baltimore consultant. Wendell La Due won the Diven medal; Malcolm McIlroy, Cornell U. professor, the Goodell Prize, which is sponsored by Engineering News-Record.

Meeting registration totalled 1,906; next year's convention will be held in Kansas City, Mo., May 4-9.

Gen. Lytle Brown dies; Engineers head, 1929-33

Maj. Gen. Lytle Brown, 78, former chief of the Army Corps of Engineers, died at Franklin, Tenn., May 3.

After graduation from West Point in 1898, General Brown was commissioned a second lieutenant of engineers and served on the Mexican border and in the Spanish American war in Cuba and the Philippines, where he became city engineer of Manila and engineering officer for Northern Luzon.

While commanding a battalion of Engineers at Fort Levenworth, Kan., in 1911, he made Douglas MacArthur, future General of the Army, his adjutant.

In 1917 he became colonel and the next year wartime brigadier. He later commanded many districts for the Engineers. In the second world war he served in important advisory capacities. He was chief of Engineers from 1929 to 1933.

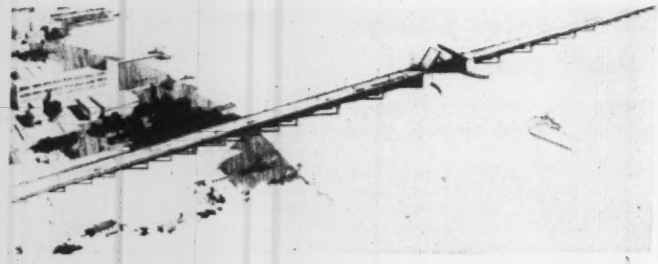

Jacksonville awards contract for substructure of 3,667 bridge

A $1,179,668 contract for the substructure of the 3,667-ft Gilmore St. Bridge over the St. John's River in Jacksonville, Fla., has been awarded to Diamond Construction Co., Washington, D. C. The low bid was $181,000 below the estimate of the Florida State Road Department.

At the same time, the road bureau rejected for the second time a $5,208,000 combined bid on both the substructure and superstructure (ENR May 3, p. 17). Unit prices for the structural steel in this bid were considered excessive.

Located in downtown Jacksonville, the bridge will be part of the planned $50,000,000 Jacksonville Expressway. River traffic and adjoining terrain dictated a medium level structure with a movable span over the main channel. The Corps of Engineers called for a movable span with 174-ft horizontal clearance when open, and 37-ft clearance above mean sea level when closed.

The bridge will rest on two abutments, 23 land piers and 13 river piers, all of concrete. They will have concrete-encased steel piles.

• **Spans made continuous**—Designed for H20-S16 loading, the bridge will be deck-type, carrying two 26-ft roadways separated by a 4-ft wide mall. A series of three-span continuous-rolled beams, with 61-87-61-ft spans will form both ends of the structure. These will consist of 36-in., 194-lb wide-flange sections. Beams will be spaced 6 ft 8 in. apart under the 7-in. thick concrete pavement.

Adjoining the series of continuous beams will be three-span continuous plate-girder sections, with 130-154-130-ft spans. On each side of the movable span, the roadways will be supported on three-span continuous deck trusses, with 168-224-168 ft spans.

• **Movable span**—The movable span will be a 174-ft double-leaf bascule of the Chicago type, carrying a 5-in. steel-grating deck. Each leaf will consist of two trusses, spaced 58½ ft apart. Truss panels will be 15½ ft long. The trunnion girder will be a box section 66½ ft long, weighing 59 tons. Two 50 hp motors on each leaf will be capable of closing or opening the leaves in 90 seconds.

Details of the design were described at a meeting of the Florida Engineering Society, by Paul M. Huddleston, partner, Reynolds, Smith & Hills, Jacksonville, designers of the bridge.

Army OK's Hudson bridge for Empire State's thruway

The New York State Thruway Authority won another legal point last week in its battle for a suitable Hudson River crossing, a key link in the 535-mile super road now under construction, when the Army granted a permit to put a bridge across the wide Tappan Zee separating Nyack and Tarrytown.

The controversial bridge (ENR Feb. 1, p. 112) will be the only structure over the Hudson for a distance of 33 miles—in an important part of the state.

The roadway of the deck-truss structure will be 37 ft wide in each direction to accommodate safely six lanes of traffic. There will be a center mall, 10 ft wide, which also will be available for parking of disabled vehicles. The bridge will be 90 ft wide between railing and its grade will not exceed 3%—a standard Thruway specification.

A 1,000-ft tied-arch main span will clear the navigation channel 143 ft above the water at the center and 138 ft at the supports. Originally, a 5,800-ft earth-filled causeway was planned for the west shore link but Army engineers asked its elimination to forestall possible navigation hazards for small craft and to prevent dangerous ice jams.

Chamber scores federal water policy

The U. S. Chamber of Commerce lashed out at parts of the report of the President's Water Resources Policy Commission (ENR Dec. 21, 1950, p. 23), in recommendations adopted at its annual convention in Washington, D. C., last week.

The chamber charges that "conservation of water resources and water resource development have been and are being used as the initial step in the socialization of natural resources industries."

In a four-point policy recommendation for mobilization, the chamber urged:

1. That where water resource development should be undertaken to assist the defense effort, federal, state and local governments should confine themselves to necessary and proper governmental functions and should not undertake projects which private enterprise is able and willing to construct.

2. That the American free enterprise system continue and be fostered in the development of water resources, subject only to usual regulatory powers of government.

3. That all federal multi-purpose projects and project activities be re-examined to determine if they contribute immediately to national defense. Only those proposals which contribute immediately to defense should be approved. All others should be eliminated from present consideration in order to conserve funds for defense requirements.

4. That, so far as is possible and in aid of financing the federal defense effort, water resources development should be financed by private institutions, rather than by federal expenditures.

• **Power policies**—Attacking power marketing policies, the chamber proposes that power produced at federal dams be "disposed of to existing local generating, transmitting, and distributing systems" by one of three methods:

1. Private installation of the power facilities.

2. Leasing generating facilities to existing systems.

3. Selling the power at the busbar "without discrimination as to price and without discrimination or preference among applicants for power contracts."

The policy statement urged that "federal power projects, power cooperatives and municipal and state power districts should be subjected to taxes equivalent to all federal, state and local taxes on proprietary businesses."

Protective devices contain Miss. flood

Although spectacular, and posing critical problems at times, the recent Upper Mississippi River flood did not break through any of the major protective facilities that have been installed generally in accordance with standards recommended by the Mississippi River Commission back in 1927.

The greatest headwaters flood to roll down the river from the Minnesota basin since 1892. This year's flood kept from disastrous proportions and was passed into lower reaches where, in 1947, the river carried water in far greater volume and pressures than those experienced during the recent emergency.

Only two levees were breached by the high water. One was the Louisa No. 13 Levee just below the major levee protecting Muscatine, Iowa, and the other was the Carroll District Levee—both of which are provided to give nominal protection to abandoned agricultural areas that are now used mainly as wild life preserves.

As a precautionary measure, Lock and Dam No. 20, near Canton, Mo., were taken out of service and the motors removed to keep them out of high water.

• **Locks and dams open**—Of the 26 locks and dams between St. Paul, Minn., and Alton, Ill., only three were working with the dam gates closed. Two of these were hydroelectric projects. All others were operating wide open to avoid impeding the flow of the swollen waters.

Army engineers and officials of the various levee districts along the upper river took early precautionary measures. A total of 100,000 sand bags were distributed to critical points by the U. S. District Engineer at Rock Island, Ill. Under the Mississippi River Commission's standards the major levees are built to a height of three ft above the record stage.

In addition to meeting threats from the height of the water as it rolled along, engineers had to gage the ability of the levees to hold against continued high pressures for periods of three and four days at a stretch. Weak spots were watched and baffle walls and other protective devices placed.

• **Common Causes**—Levee failures are caused most commonly by overtopping, wave wash or scour on the riverside of the levee slope, seepage through the levee and sandboils that occur on the landside. Strong winds increase the incidence of failure by creating additional water turbulence.

A big problem in protected areas is the inability of storm and sanitary sewers to discharge properly at such a time. Many municipalities do not have sufficient pumping capacity.

The outstanding fact of the Upper Mississippi flood is that all of the major levees performed according to plan and that not a single person or any livestock had to be evacuated from behind these levees.

There were some evacuees from behind the two breached secondary levees and thousands of others had to be removed in those cases where they lived between the major levees and what is normally the river's edge.

California compiles data on state water conditions

The California departments of public health, natural resources, and public works have started to compile data on the condition of the state waters. The studies were requested by the state water pollution control board.

The survey will include sampling and analysis of the quality of water in 30 of the state's fresh water streams and lakes at a total of 60 different sampling stations. State agencies also will compile for the pollution board all data pertaining to this subject already in their files and records.

S. F. city fathers oppose Bay Area Council proposal

The controversy over the second San Francisco Bay crossing has been brought to a boil again—by city administrators who have come out against the proposed Bay Area Council "master plan" (ENR, Nov. 23, 1950, p.31).

Submitting data prepared with the aid of City Engineer Ralph Wadsworth and Public Works Director Sherman Duckel, Chief Administrative Officer Thomas A. Brooks called the plan vague and impractical.

His report to the Board of Supervisors on the plan states that approval would be the "equivalent of abandoning its endorsement of the southern crossing." Earlier, the board had favored a crossing from the southern industrial area of San Francisco to Alameda, which had been proposed by a 1946 Joint Army-Navy Board (ENR, Feb. 13, 1947, p. 3).

The Bay Area Council plan suggests a bridge from the northern San Francisco financial and shipping area, crossing the existing bridge at its midpoint on Yerba Buena Island, and extending on to the Oakland mole vicinity, south of the terminus of the present bridge in the East Bay—thus forming an "X" with the existing bridge. Another bridge was proposed farther south than the location recommended by the Army-Navy.

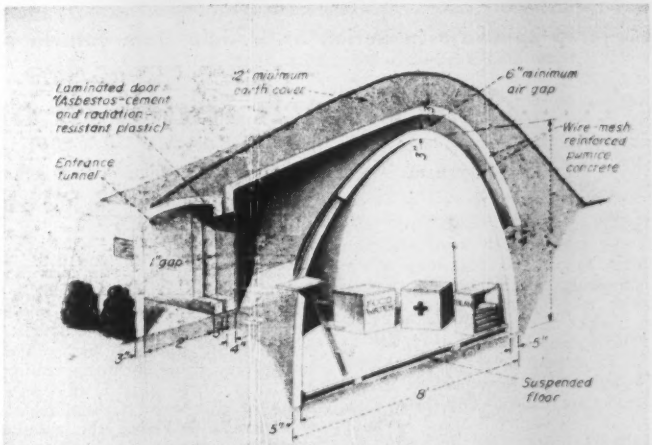

PRECAST BOMB SHELTER—Two separate reinforced concrete shells and a cross-tunnel comprise a bomb shelter that will accommodate up to seven persons and emergency equipment, which is being offered for sale (erected) to the public for less than $1,000. Designed by Consulting Engineer Jacob Feld, it is expected to provide full protection against atomic bombs at distances greater than 2,500 ft from ground zero. Arthur DeBevoise, president of A. DeBevoise Co., Inc., Bayside, N. Y. contractor, has applied for patents and formed a company, Bomb Shelters, Inc., to precast, sell and erect these shelters, as well as larger ones. He also plans to license other contractors.

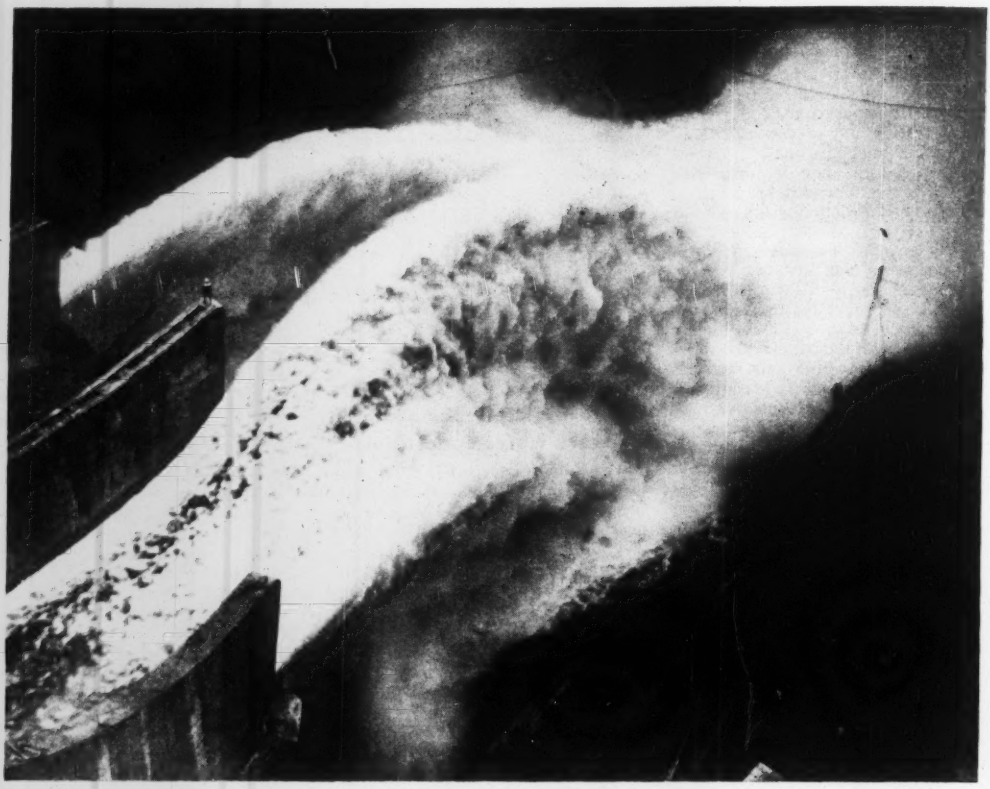

Ski-jump spillways in action at L'Aigle Dam furnish spectacular example of . . .

. . . . . The French touch in dams

Waldo G. Bowman
Editor

THE FLAIR for the unusual and spectacular so frequently associated with things French has turned up in the dam field. Specifically, this French touch may be noted most strongly in a series of structures nearing completion along the upper reaches of the Dordogne River in the Massif Central, as the mountains of central France are called. On these dams will be encountered novel ski-jump spillways discharging high in the air from the roofs of the powerhouses; prestressed concrete girders; precast concrete forms that become the permanent faces of a dam; distribution of concrete by a combination monorail and bridge crane system; a semicircular powerhouse; and the use of steel cables to hold the spillways in place.

None of these features is, of course, the result of a whim or even of a calculated desire to create a striking visual effect or a novel structural form. Each results from careful but bold design to fit a dam to a given site and operating conditions. In general concept and in important details they are the product of Andre Coyne, France's top dam designer and one of Europe's best. And another key figure in their creation is Marcel Marv, director of equipment for the Massif Central region of Electricite de France, the national electricity authority that builds and operates the country's hydro projects.

• Power when you need it—The Dordogne River basin is one of the most important in France from a hydro development standpoint. Its source is the highest peak in the Massif Central (El 6,190 ft), and its course, in a generally south and west direction, soon leads it into a series of gorges about 90 miles long, which end at an elevation of less than 600 ft. In these gorges and on the tributaries that empty into them are many good dam sites whose development promises the production of over 2 billion kwh of energy annually. The gorge dams alone, of which there are four, account for 1.7 billion kwh of this energy by utilizing 1,200 ft of head through four reservoirs that are practically continuous for a distance of 60 miles.

But it is not alone the size of the block of power that the Dordogne can turn out that makes it significant. To an even greater degree it is important because its power will be available in the winter months of maximum demand when the hydro plants in the high Alps and the Pyrennees are frozen up. Moreover, the Dordogne's water supply is so ample that it can assure a continuous power output—and no less than 50%

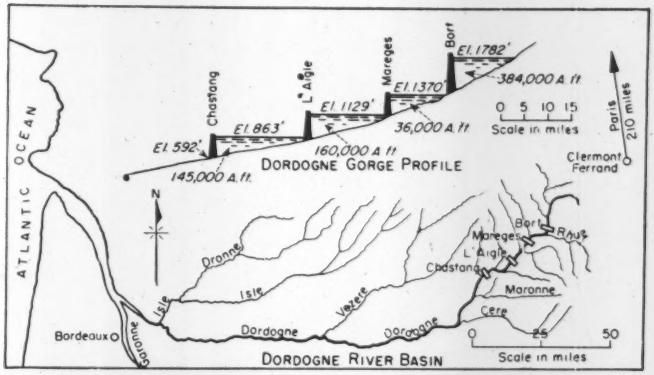

NEW DAMS ON THE DORDOGNE produce hydro power and handy precedents:

L'AIGLE: Ski-jump spillways.

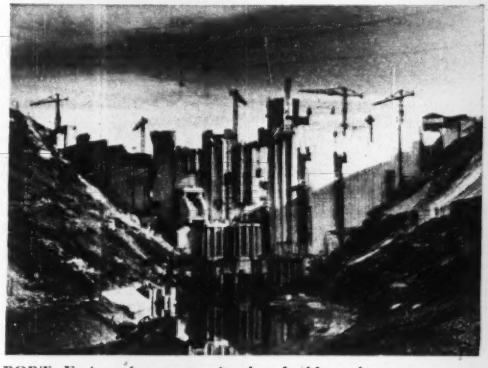

BORT: Facing of precast units that double as forms.

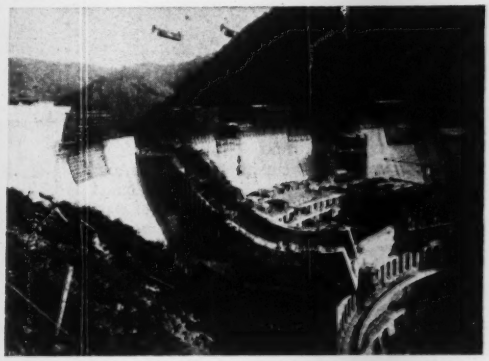

CHASTANG: Spillway forms suspended from trusses.

of the maximum even in the driest year of record.

By the end of this year there will be ten power plants in operation in the upper reaches of the Dordogne, four of which will be the gorge plants that comprise the heart of the system, and are the principal subject of this article. Two of these dams—Bort-les-Orgues at the upper end and Chastang at the lower—are still under construction. The second project from the upper end, Mareges, was completed in 1935, while the third, L'Aigle, has been generating power only since 1947. Except for Mareges, which is a concrete arch, the dams are all of the arch-gravity type. They vary in height between 280 and 394 ft, making the Francis-type turbine with a vertical shaft the logical generating unit to be used.

Operation of the system contemplates using the three lower installations as run-of-river plants—since their reservoirs are relatively small—with Bort acting as a supply and regulating reservoir and also generating a sizeable chunk of power on its own. In detail, the four plants will have the following annual output in millions of kwh: Bort, 340; Mareges, 362; L'Aigle, 500; and Chastang, 515. Data on these new dams are given in the accompanying tabulation.

• **Ski-jump spillways**—The common denominator of the four dams—and the feature that figures most strongly in the French touch characterization—is a new type spillway, named—also with a French touch—the "saut de ski" or ski jump. Terminating high in the air and throwing its discharge a hundred or more feet downstream, the resemblance to a ski jump is readily apparent.

The most obvious advantage of the device is to remove the erosive impact of the water from the toe of the dam. This would be an advantage even though the erosion were merely moved to a less critical location in the river bed. Actually, the erosion is also much less because the jet of discharged water has its velocity reduced by air friction and at the same time is converted into finely divided particles—becoming a mixture of air and water—with only a moderate energy of impact.

After this advantage of the ski-jump spillway was accepted, others were recognized as possible and logical. Making the spillway serve as the roof of the powerhouse was one. Another that automatically followed was the grouping of the dam, spillway and powerhouse into a compact

DATA ON DORDOGNE DAMS

	Height (ft)	Length (ft)	Volume (cu yd)	Turbines (kva)
Bort	394	1,280	900,000	2 at 100,000 1 at 35,000
L. Aigle	312	951	320,000	4 at 50,000
Chastang	280	1,150	332,000	2 at 90,000

single unit. A saving in materials resulted and, most important, a saving in excavation, as compared to that required when spillways, and sometimes powerhouses, have to be carved out of the abutment rock. The principal disadvantage of the compact grouping is a slower construction tempo, caused by the necessity for simultaneous building of three types of structures in a confined working space.

As with many innovations, the concept of the ski-jump spillway was suggested by an installation made without any idea of general utility in mind. It came about this way: On the Mareges Dam the spillway had to be placed at the right abutment. Here there was a large outcrop of hard rock just downstream and, since it would be costly to remove, Mr. Coyne decided to terminate the spillway on top of it, about 50 ft above the stream bed. The resulting reduction of erosion was so notable that when he came to design L'Aigle Dam in a narrow gorge, which required center-of-the dam spillways or else abutment tunnels, he chose the former and, recalling Mareges, terminated them on top of the powerhouse.

L'Aigle Dam, built by the contracting firm Les Entreprises Leon Ballot, thus had the first ski-jump spillways, although another dam designed at the same time by Mr. Coyne —St. Etienne-Cantales, on the Cere, a Dordogne tributary—has them too and was completed first (ENR Aug. 8, 1946, p. 182).

• **The L'Aigle spillways**—Each of the L'Aigle spillways—there are two disposed symmetrically about the dam centerline—is designed for a discharge of 70,000 cfs. And because of the narrowness of the gorge they are aligned and shaped to direct the jets of water into the center of the stream and away from the gorge walls. This is done by tilting the discharge ends of the slabs until their inside edges are 10 ft higher than the outside, at the same time giving the bucket something of a spoon shape. Such a surface causes the sheet of water flowing down the spillway to rotate or twist toward the inside, thus increasing the height and decreasing the width of the discharge jet. Such rotation also breaks the jet into particles and mixes it with air. The spillways project the water 165 ft downstream even when operating at only about half of full discharge.

Since the weight of the water on the spillway can reach 3,000 to 4,000 psf, a 3 ft thick slab had to be used across the powerhouse span, which at L'Aigle is 71 ft. And because a spillway of this kind joins two very rigid structures—the dam and the powerhouse—the possibility of high stresses from expansion and contraction must be taken into account.

This was done at L'Aigle by cutting the spillway slab with a transverse joint several feet above the powerhouse roof. Then, to be sure that the lower end of the slab and

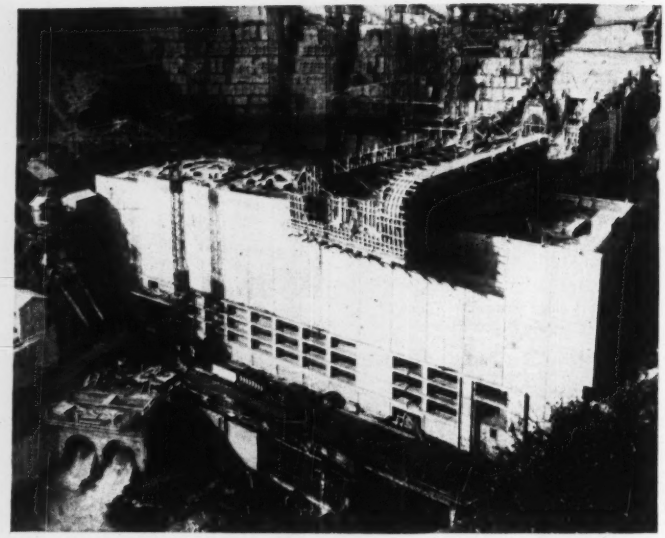

BORT POWERHOUSE with a plane front wall contrasts with a semicircular one at L'Aigle and the concave facade at Chastang.

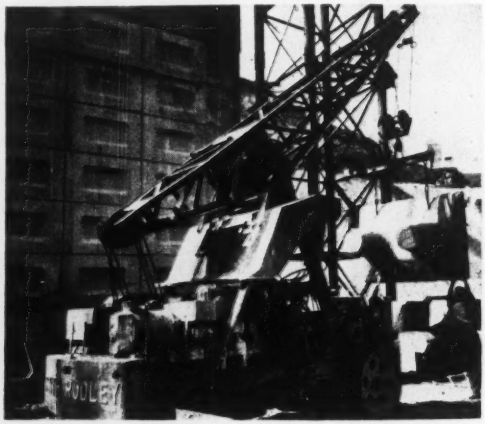

PRECAST FORM UNITS at Bort are also the permanent faces of the dam. The 3½-ton units are erected by a small motor crane.

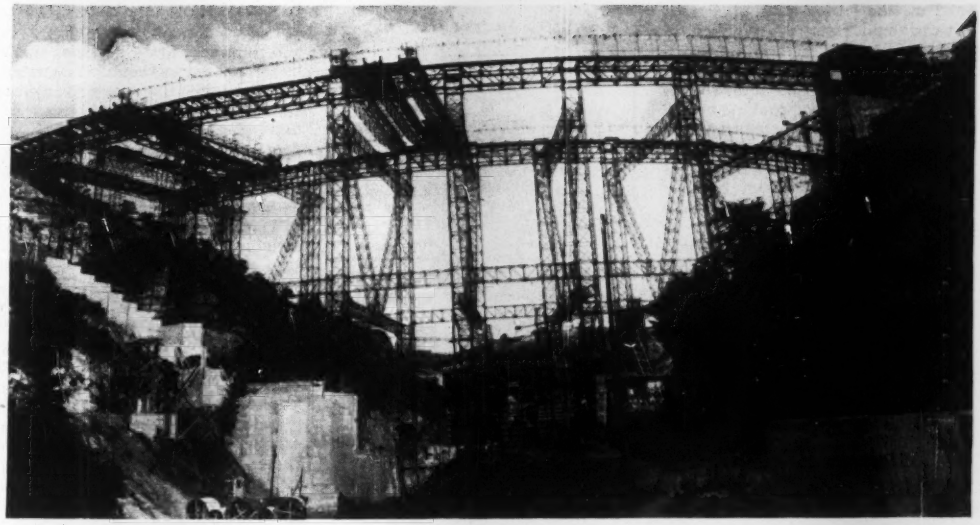

CONCRETE DISTRIBUTION SYSTEM at Bort operates on this steel frame-work. A monorail loop from mixing plant to dam follows the top trusses, which also support the two double bridge cranes that handle the buckets to points of discharge.

its powerhouse support was effectively joined to the dam, ten horizontal steel cables were placed in the roof slab under each spillway, and each cable tensioned to 150 tons after the concrete was poured. It is also envisioned that these cables will aid in resisting the torsion that may occur when only one of the spillways is in operation.

Similar prestressed concrete is used for the 6½ ft thick inside guide walls of the spillways, which act as girders where they pass over the powerhouse. Here both horizontal and vertical cables are employed, the latter reacting against the roof slab.

• **Novel powerhouses**—The narrow gorge at L'Aigle also fathered another innovation—the use of a semicircular powerhouse. The only way that the four 50,000-kva generating units could be arranged in the constricted space was in an arc pattern, and it was logical to have the powerhouse walls follow the same curve. The resulting unique architectural effect is heighted by a symmetrical arrangement of lines of horizontal and vertical windows.

The powerhouses of the other Dordogne ski-jump spillway dams—Bort and Chastang—also benefit from architectural attention to their windows. A horizontal motif is used at Bort where the wall is plane, while vertical windows are used in the slightly concave wall at Chastang.

At Chastang also, the concreting of the spillways over the powerhouse roof furnished a departure from the ordinary. To carry the forms without extending supporting framework to the powerhouse floor, the contractor, Societe Generale d'Entreprises, suspended them from a series of 12 steel falsework trusses. Spanning 80 ft between the powerhouse walls, they were 26 ft deep and equipped with a total of 104 slings carrying 15 load-distributing girders. The entire assembly weighed 630 tons, and was installed initially and then moved to the second spillway in pieces by the 25-ton materials cableway.

To cut down stripping time and difficulty, the bottom of the forms was composed of prefabricated concrete panels left in place. And to strike the falsework trusses speedily, they were set on hardwood blocks which could later be burned away with a blow torch.

• **Precast dam faces**—The dam still under construction at Bort-les-Orgues, even more than L'Aigle and Chastang, adds luster to French dam building accomplishments. Although its single ski-jump spillway follows the precedents previously set, several other aspects of the design and construction are quite extraordinary. One that immediately commands attention is the use by the contractor, Entreprises Metropolitaines et Coloniales, of a novel facing of precast units that serve also as the concrete forms.

A total of about 45,000 of these units is required. Weighing 3½ tons each, the units have face dimensions of 5x7 ft and are about 18 in. thick, with two projections (for anchorage) extending backward another 2 ft. It was decided that the units could not be any smaller or lighter and still have the necessary stability and strength under the pressure of a 5 ft depth of freshly poured concrete being vibrated into place.

Only one size unit is required, since the downstream dam face is made in a series of steps, instead of the more usual curve, with each step being an exact multiple of the unit height of 5 ft.

The units are manufactured in a building at the base of the concrete plant. Rigid steel molds are used. Set on a vibrating table they are filled by a bucket brought from the mixer by an overhead crane. Completed units are carried out onto the dam by a cableway, and then set up as the dam facing and forms by a small motor crane.

The same plant that turns out the face slabs also manufactures special prefabricated concrete units for all the projecting parts on the upstream face of the dam, such as trash racks, gate grooves and platforms. Using prefab units for these parts saved expensive and difficult forms and falsework on the dam. At the points where they are installed they take the place of the face units, and become an integral part of the concrete of the dam.

• **Job-made cement**—It is also noteworthy that 70% of the cement re-

quired for Bort Dam is manufactured on the job. A slag cement, it is wet-ground from slag shipped in from the Lorraine steel mills, an expedient adopted when it became clear that sufficiently ample and regular supplies of cement could not be counted on from commercial mills.

The dry slag is fed from storage silos into three ball-grinding kilns containing water equivalent to 30% of the weight of the charge. These kilns turn out 10 tons per hour of slag ground to the extreme fineness of 3,200 sq cm per gram. In the form of a paste it is then stored in vats equipped with agitators until it is pumped to the concrete mixers where it is combined with 30% of portland cement and the stone aggregates.

The resulting concrete has the advantage of having a low heat of hydration (80 cal per gram), appreciably reducing the footage of refrigerated water pipes that are to be used on Bort dam for the first time in France. The concrete is slow setting, but periodic tests prove its three-month-strength to be equal to that of a straight portland cement concrete of the same age.

The cement factory is an integral part of the concrete plant, the whole being housed in a single building set into the hillside. Slag and aggregates are brought in at the highest level by bucket tramways or teleferiques. Below this are the slag grinding kilns, and on the next step down the concrete mixers—6 of 4-cu yd capacity in two groups of three for the mass concrete, and 2 of 2-cu yd size to serve the pre-cast-units plant and supply the smaller batches required for reinforced concrete work. Below the mixer floor is the charging station for the buckets that are moved to the dam on the monorail system.

•Unique concrete distribution—The most spectacular and unusual feature of Bort dam is the installation of monorails and bridge cranes used to move 3-cu yd buckets of concrete from the mixing plant to the dam monoliths. It is believed to be both unprecedented and more nearly automatic than any concrete distribution system yet devised.

After the foundation concrete had been placed by cableway, a steel framework, (photo previous page), was erected over the dam. It consists of an upstream and a downstream line of square latticed columns, braced by both longitudinal and lateral struts and by lateral diagonals. Along the top of each line of columns, which are 154 ft apart, a heavy truss is placed to serve as the craneway. The top flanges of the top chords support the



SCHEMATIC DIAGRAM of Bort's monorail and bridge crane concrete distribution system.

rails for two double 9-ton bridge cranes which span between the column lines, and from these chords also the monorail system is suspended.

For concreting the lower 250 ft of the dam, where 90% of the concrete volume is concentrated, buckets hooked onto monorail carriages at the mixing plant move out along the inside edge of the downstream truss. At the desired location, they are picked off automatically by one of the bridges crane hooks, which then moves them transversely (upstream) to a point directly over the point of deposit, to which they are lowered and discharged.

The bridge crane hook then raises the empty bucket, moves on across the span to the inside of the upstream truss where it hooks it on to the monorail carriage, which has continued around the circuit and is waiting for it.

Each monorail carriage has a cab and an operator who thus moves buckets round and round the continuous track—out on the downstream truss back on the upstream truss. The capacity of the system, which was designed to place 234 cu yd per hour, is limited only by the number of bridge cranes used, in this case two with four hooks.

This mode of concrete distribution was used until the concrete reached the elevation of the top transverse struts of the framework. At this point the upstream part of the framework (that is, that portion which had not been concreted into the dam) was removed, and the monorail circuit transferred to the downstream truss. Full buckets then came out on the inside as before, but returned along the outside of the same trusses.

As a part of this rearrangement, the bridge cranes were cut down to about half their original span, with their upstream tracks running on one of the completed steps of the dam face. They could thus continue to take buckets from the monorail and lower them to front-face areas not yet concreted to full height.

For concreting the 150-ft height of the dam above the elevation of the monorail, four hammerhead cranes were installed on one of the steps of the downstream face. Shuttle carriages were placed on the top struts of the framework to take the buckets from the monorail and move

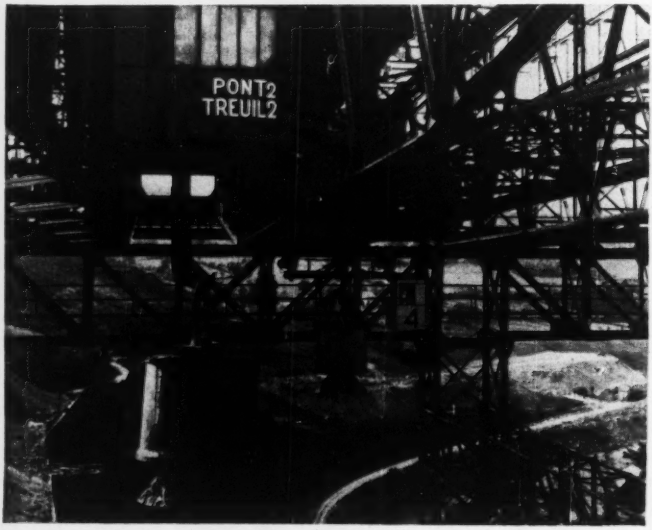

EMPTY BUCKETS moving back to Bort mixing plant. One in foreground on bridge crane hook will be attached to a carriage on the monorail loop, like the one in the background marked with a 4 on the operator's cab.

them within reach of the hooks of the hammerheads. Only about 75,000 cu yd of concrete had to be placed by this relatively slow method.

Bort dam concreting is now nearing the end so that this radically new method of distribution may be adjudged a success. It takes its place beside the ski-jump spillways as a French touch that deserves to command attention.

• **And poor foundations too**—No discussion of Bort would be complete without noting that this largest of French dams is founded on two kinds of foundation rock of widely different strengths—gneiss, 15,000 to 20,000 lb per sq ft, and micaschist, 5,000 lb per sq ft. Moreover, a crushed cleavage plane or fault between the two formations crosses the gorge directly under the dam. Between this main fault and a second one, which intersects it in the left abutment area, is a deposit of crushed micaschist that introduced other difficulties.

Both bold design and ingenious construction attended the placing of a major dam at this site, which was fixed by the location of the village of Bort directly below, and the absence of any gneiss at all farther upstream. These design decisions were taken: (1) to curve the dam so that the arch action could operate against the downstream gneiss; (2) to make the cross section such that there would be a minimum of 50 ft width of bearing on the gneiss at any elevation; (3) to extend upstream the base of the monoliths resting on the micaschist thus reducing the unit pressure to 3,000 lb per sq ft at the same time making these projections or heel-blocks high enough that they could serve as supports for the trash rack structures at the penstock intakes; (4) to leave wide joints (13 ft) between the two monoliths on the river bed so that they can complete any differential settlement before they are concreted in at the end of the job; and (5) to clean out and span the cleavage planes or faults with a grillage of railroad rails.

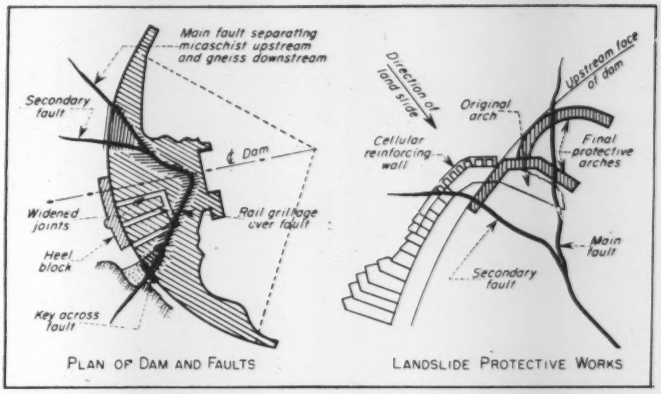

HOW POOR FOUNDATION WAS TREATED to support Bort Dam across a fault that divided strong gneiss from weak micaschist.

Construction ingenuity was required when slides in the micashist along the faults (which contained considerable slick clay) threatened to bring down most of the left abutment. When injection of nearly 400 tons of cement grout failed to arrest the movement, a concrete arch was built about half way up the hillside, abutting at one end on the gneiss and at the other on an outcrop of sound micaschist.

This arch was not founded very deeply and, a year later, another movement cracked it. Grout injection that required 600 additional tons of cement was followed by building a cellular wall behind the arch to reinforce it. A series of deep shafts were sunk to the sound micaschist, and concreted, after which the material between the shafts was excavated and replaced with concrete, resulting in a continuous web. This reinforcing wall was 10 ft thick, and permitted excavation in the stream bed to proceed.

Toward the end of the foundation work, however, another set of protective works had to be built higher up on this same abutment in order that a bad area of crushed micaschist (in the angle between the main and secondary faults) could be removed and replaced with concrete. These works took the form of two arches built in trenches dug as deep as 120 ft into the micaschist but taking support on the gneiss outside the fault area.

Finally when all of the bad material had been removed down to the base of the dam, the faults were cleaned out, concreted where they were particularly wide and then spanned by the rail grillages.

It can thus be fairly said that Bort Dam, from bottom to top, is a worthy example of the French flair for using unusual dam building techniques. And since it is the key structure in the Dordogne power system it is apt to be remembered for many years.

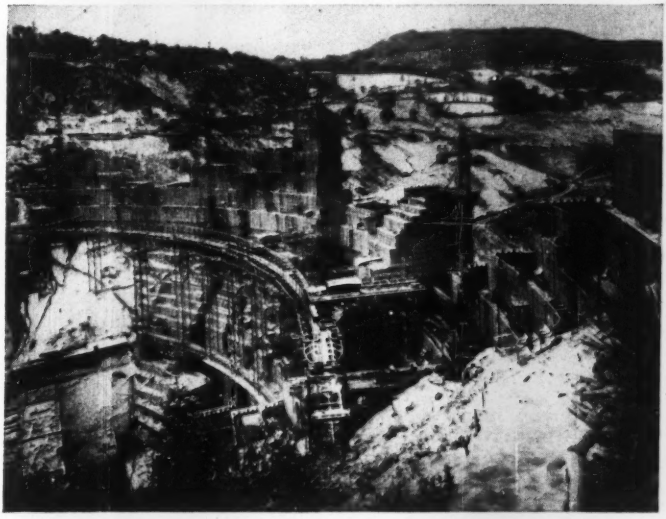

FOR TOP OF DAM CONCRETING at Bort, hammerhead cranes handle buckets brought out by monorail whose loop is now carried only on the downstream trusses of the framework, since the upstream trusses and supports have been removed.

We've given this diagram a name...

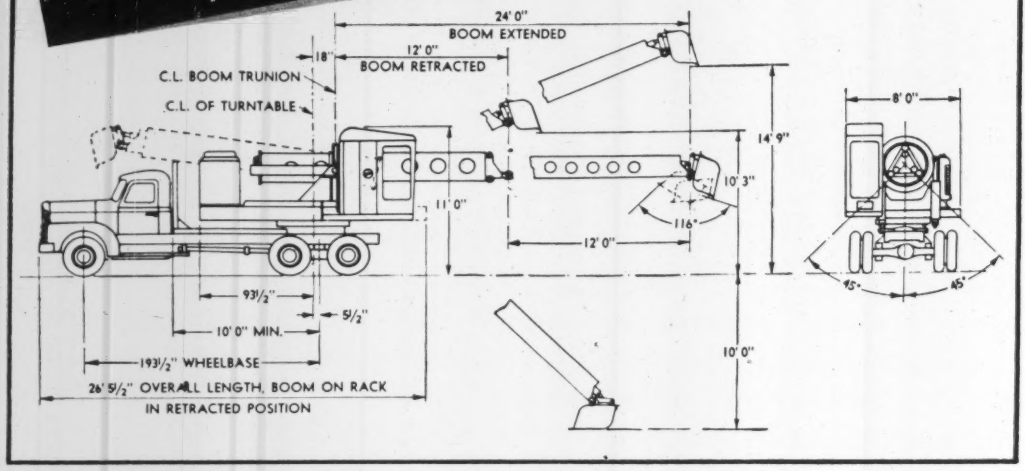

"SIMPLICITY"!

THIS IS THE ONE WORD that really describes the Multi-Purpose Gradall Construction Machine. The Gradall handles more types of construction work—more simply—than any other machine on the market! Whether it's trenching, excavating, ditching, grading, or pavement removal, the Gradall handles the job speedily and with such accuracy that much costly hand labor is eliminated.

One of the big reasons for this unusual simplicity of operation lies in the Gradall's *hydraulic design*. You get the full advantages of hydraulic power in the all-welded boom, rather than having it dissipated through mechanical transmission, as in ordinary construction machines.

But ask for a demonstration to see for yourself. You can arrange this with your Gradall Distributor.

Gradall Distributors in over 60 principal cities in the United States and Canada

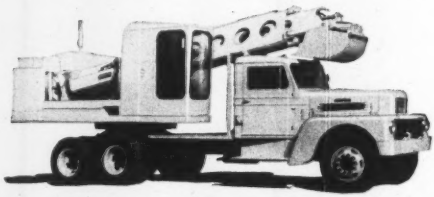

GRADALL
MULTI-PURPOSE
CONSTRUCTION MACHINE
with HYDRAULIC DESIGN

Gradall®
DIVISION OF WARNER & SWASEY Cleveland

GRADALL—THE MULTI-PURPOSE CONSTRUCTION MACHINE

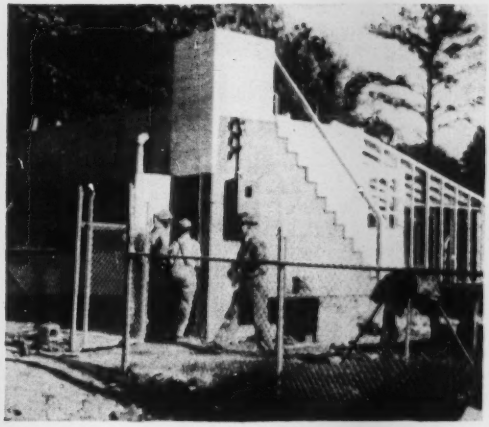

A very small town got a very cheap solution to its sewage-disposal problem . . .

Found: A sewage works the village can afford

George H. Ellis
Johnson & Williams, Consulting Engineers
Washington, D. C.

THE SMALL-TOWN sewage disposal problem has been licked for Mathews, Va.—at the startlingly low cost of $18,387.62.

Mathews, fishing and oystering town and county seat, centers on a peninsula that juts into Chesapeake Bay. It's a typical small town, with three square blocks of business section—courthouse, library, auto agencies, drug store, bank, and not much more.

But in this limited downtown area there had developed a sewage problem: overcrowded septic tanks, seepage from some, confusion as to which tank belonged to whom and concern that pollution might reach the offshore oyster beds.

First efforts of the town leaders to find a way out of their quandary brought forth a $100,000 plan. (It might as well have been $100 million; financing was obviously out of the question.) This plan was nothing but a scaled-down version of the typical municipal installation.

So, the president of the town bank and some of the business men formed —and invested their money in—the Mathews Corporation, and engaged Johnson and Williams, Washington, D. C., consulting engineers.

• **Needs found small**—A thorough survey proved that the problem did not extend beyond the business section; beyond its limits the community becomes immediately and distinctly rural. Further, since there were no basements needing service, deep sewers weren't needed; sub-frostline depth was sufficient.

In setting size of treatment plant, population was no index since the area is busy by day and nearly vacated at night. A count of business house personnel and probable customer traffic, together with total sanitary facilities, was considered. The result arrived at was that sewage would equal that from a population of 100 persons, assuming a rate of 100 gal per capita per 24-hr day—total flow: 10,000 gpd. Peak flows were figured at 300% of normal.

No known sewage treatment plant had been built to give complete treatment to so small a flow.

• **Choice of treatment**—Contact aeration was the treatment decided upon as offering the most economical installation. Treatment was designed for 95% BOD removal. (For more on contact aeration as applied to small installations see ENR Mar. 16, 1950, p38, Nov. 3, 1949, p 27.)

Simplicity of design and operation was stressed from the start; no allowance was made for aesthetic effect. The whole plant could have been undergound, leaving a small, neat blower house above grade; but the additional cost of excavation ruled against this. Other features and niceties frequently incorporated were barred because of cost. Final construction cost was a gratifying reward.

• **Not pretty, but cheap**—The plant, offering all the essentials of a complete treatment works, was designed as a reinforced concrete box 12½ ft square by 15 ft deep, with reinforced concrete partitions dividing the digester, settling tanks and aeration chambers. Tanks and chambers have hopper shaped bottoms, eliminating need for mechanical sludge collectors. A lean-to greenhouse was put against the rear of the plant to cover two 4 x 13¾-ft sludge drying beds and also to house the air blowers.

Other equipment, including a hypochlorinator, was put under stairs leading to tops of the tanks. A bar screen was built in the influent line in the yard. No grit removal was deemed necessary; a weir in the effluent was the only flow measurement means provided.

There is 2¼-hr detention in the primary sedimentation chamber; 1¼ hr in each of the two aerators; 1½ hr detention in both the intermediate and final sedimentation chambers. Sludge is digested before drying; effluent chlorination, storm or flood water overflows, and headwall with flap-gate were also included.

• **Aeration**—Air is fed in at the rate of 4 cu ft per gal of estimated sewage by two small rotary-type positive blowers. Use of two blowers affords the possibility of cutting down to 2 cu ft per gal at night when the sewage flow is negligible. A larger blower equal to the two small ones combined was installed as a standby. Air is diffused into the sewage through 24 12-in. long by 4-in. dia porous carborundum diffuser tubes arranged

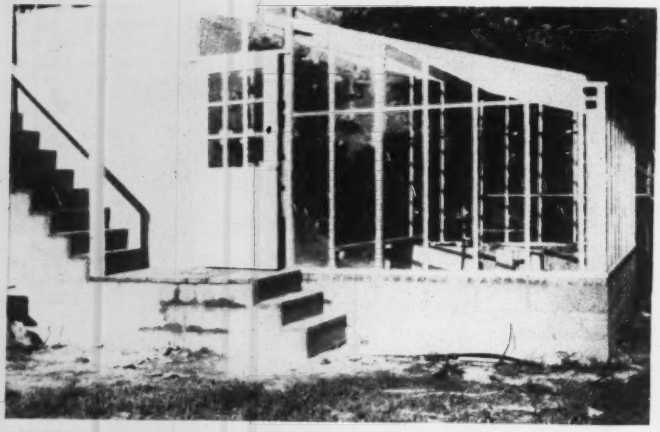

GREENHOUSE for sludge drying was placed against the wall of the tank.

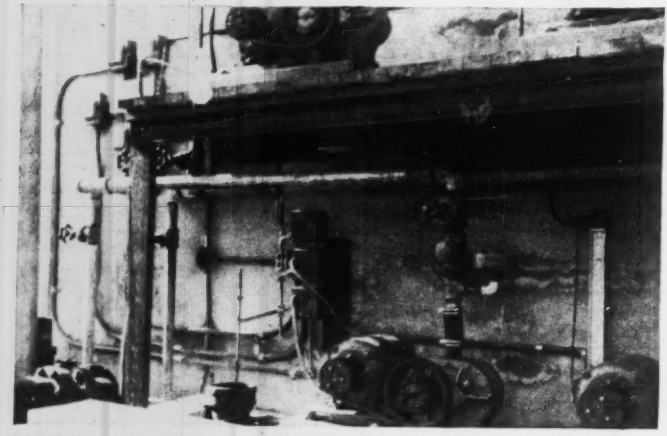

BLOWERS are in the greenhouse. Other automatic controls are under stairs.

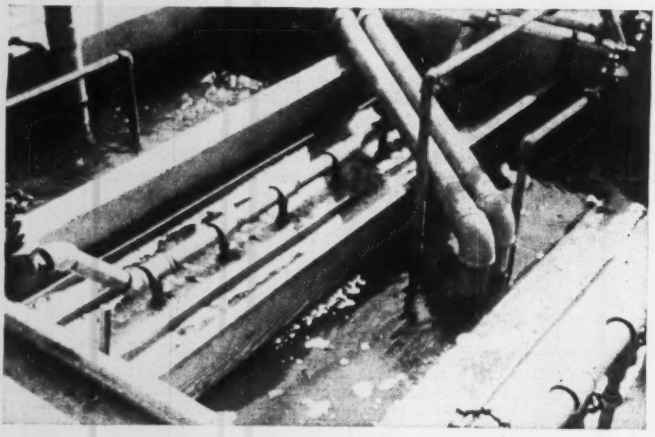

FLOW is from left through primary settling, first-stage aeration and intermediate settling tanks shown here. Two 3-in. diagonal pipes are for sludge return to inlet end.

in pairs, 12 tubes in each aeration chamber.

The porous tubes are 9 ft below the liquid surface, and the diffused air filters up through contact plates arranged vertically on 1½-in. centers. Contact plates are standard cement-asbestos building boards ¼-in. thick. Diffuser tubes hang in place at the ends of 1-in. pipes which supply the air to them. A good diffusion of air is evidenced by a quiet bubbling over the entire surface of the aeration chambers. Early difficulty in sealing the ends of the tubes to prevent leaking was overcome by use of soft rubber gaskets.

• **Double-duty air**—Since air service is an integral part of the plant, air-lift pumps were installed for all pumping operations. And since no pumping operation lasts as much as a minute, air to the diffusers can be interrupted during pumping without consequence to aeration. Air is introduced to the lift pumps at a point 8 ft below the sewage surface in the aeration tanks. At the opening of a valve, the air flows to the pumps against the 8-ft head instead of going on down to the diffusers which are at 9-ft depth.

Thus, pumps are operated with no additional cost. And, there being no moving parts about the pumps except the operating air valves, low maintenance cost is assured.

• **Flow and control**—Incoming sewage collects in a 2½-ft square wet well and is pumped by air lift—automatically operated by a float—to the top of the primary settling chamber. A 4-in. air lift, manually operated, pumps settled solids from this primary settling tank's hopper bottom to the top of the digester; digested sludge flows by gravity through a manually operated gate valve to the drying beds. Two 3-in. air lifts, automatically operated, pump settled solids from the aerators, intermediate and final settling tanks back to the inlet end of the primary settling chamber.

Air is controlled by a 1¼-in. solenoid valve actuated by electric impulse from a relay and a sequence timer. This permits setting up a schedule of automatic pumpings with timing adjusted to keep the hopper bottoms as clean as possible—far cleaner than could manual operations depending on a plant attendant. All of the regular plant operations can be scheduled and accomplished in consecutive order automatically day and night, Sundays and holidays. And time, duration, and sequence of all of the operations have a wide range of adjustments and variations, which

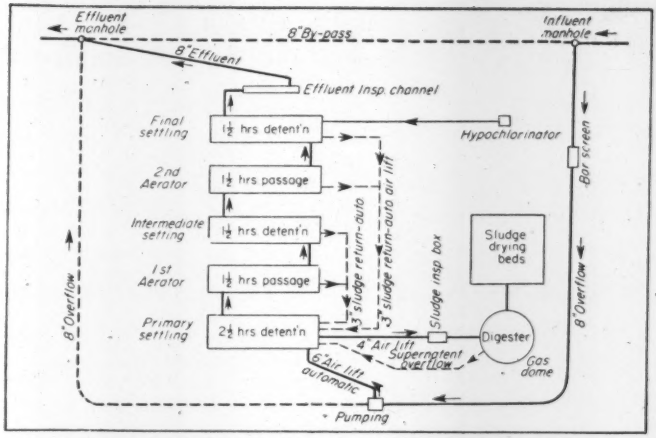

SIMPLE and SMALL—the Mathews plant is designed for automatic operation in every possible step. Attendant needs only to visit plant twice daily.

permit setting of operations to match exactly the flows anticipated.

A plant inspection each morning and evening by the attendant is enough to insure good operation.

Removal of sludge from the primary settling chamber into the digester was not made automatic because of the relatively small flows. It was not possible—with small flows and variations of large magnitude—to schedule automatic operation; over-pumping could too easily happen and would be detrimental. Under-pumping the primary settlement into the digester can be compensated by the plant attendant, but over-pumping would result in filling the digester with clarified sewage. This would displace the digester supernatent which in turn would flow into the primary settling tank with a strong septic and anaerobic action.

Over-pumping in the operations of desludging the aerators, intermediate and final settling tanks is not detrimental. Since this sludge is pumped into the primary settling tank for resettling, over-pumping simply means recirculation within the plant—and increased oxygenation.

• **Cost of building, operating**—The completed sewerage system—840 lf of 8-in. sewers, 450 lf of 4-in. laterals, manholes and appurtenances—plus the plant cost the grand total mentioned above, $18,387.62. The system is being operated at an average monthly cost of $75: $30 for electric power, $35 for labor, and $10 for materials. Total operating cost is 75¢ per capita per month.

These costs seem to indicate that the solution to small town sewerage problems may be near at hand, that small communities faced with orders to abate pollution are not without hope to meet the demands.

Contractors contributing to the success of the project were Mueller Construction Co. and Ferguson Construction Co., of Newport News, Va.

Notes on legal decisions

Summaries of decisions relating to construction work prepared by I. Vernon Werbin, counselor at law and engineer, New York, author of Legal Phases of Construction Contracts (McGraw-Hill Book Co.)

Cost-plus contracts

In negotiating a contract for the construction of an apartment house project, it was first contemplated that the contractor would be paid the cost of the work plus a fee. The written contract, as finally entered into, provided: "The owner shall pay the Contractor for the performance of the Contract, subject to additions and deductions provided herein on account of construction the sum of $325,882.00 cash. . . ." In the preliminary negotiations preceding the execution of the written contract, it was agreed that the contractor was to be paid a 5 percent "Builder's fee". No such provision was incorporated in the final written contract.

The contractor brought an action to recover the 5 percent fee. The court held that the contractor was not entitled to recover such fee, holding that the contract was clear and unambiguous. The printed form of contract that was used provided: "and in addition thereto, as a fee, $—— cash etc." This followed the part of the contract quoted in the previous paragraph and was stricken out of the contract. The court in commenting on this phase of the case stated that if the parties had contemplated paying the contractor a fee in addition to the amount of payment set forth in the contract, this part of the printed form of the contract would not have been stricken out, but instead, the parties would have inserted after the words" and in addition thereto, as a fee, $—— cash", the amount of the fee to be paid, that is 16,294.01, without the dollar mark—this sum representing five percent of the contract price.[1]

The court in its opinion further stated: "For some years cost-plus contracts have been frowned upon, as encouraging extravagance. They have been largely superseded by cost-plus-fixed-fee contracts. Perhaps the printed form of 'lump sum' contract, which provides for two sums, one called 'fee' was modeled after a cost-plus-fixed-fee contract with the lump sum separated into two sums. Strictly speaking, a 'fee' has no place in a 'lump sum' contract; the contractor works, not for a fee but for a 'profit', an excess of the lump sum over cost.'"

Contractors, engineers and architects, when using printed forms of contracts should make sure that the form of contract that they use is appropriate for the type of contract being entered into.

(1) Levin v Stratford Plaza, Inc. et al., 76 A. 2d 558 (Court of Appeals of Maryland, Nov. 3, 1950.)

Warranty of contract

A contractor installed a heating and air cooling system and warranted its proper performance for a certain period. During the period covered by the warranty, the systems were severely damaged solely as a result of high floods in the area in which the building was located.

The owner of the property brought an action against the contractor for the cost of putting the systems in working order, but was denied a recovery. The court held that though the warranty was unconditional, it was not reasonable to suppose that the parties, when they entered into the contract, contemplated that the contractor would be liable for damage to the systems resulting from floods.[1]

(1) Cook Paint & Varnish Co. v Lydick-Barmann Co., 230 S.W. 2d 581.

HEAT TANK-CARS FASTER

uses less fuel..water..work

Do it the modern way



with a Cleaver-Brooks MOBILE TANK-CAR HEATER

Quick Job-to-Job Transport

This trim, compact, highly efficient, trailer or truck mounted steam generator is easily towed by car or truck — anywhere you need steam — for heating, thawing, cleaning — at tank-car siding, construction site, or material yard.

Hot Dry Steam in 20 minutes or less

Designed for fast steaming, the Cleaver-Brooks Tank-Car Heater gives you 125 lbs. of steam pressure in 20 minutes or less — from a cold start. It's the only tank-car heater with the fuel-saving four-pass flue travel construction. No water problem — full condensate recovery and return to heater under pressure.

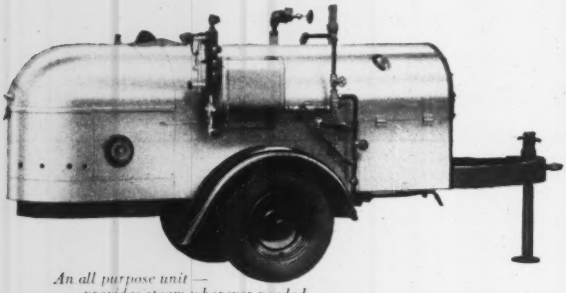

An all purpose unit — provides steam wherever needed — for heating, thawing, cleaning.

Built for Full Capacity ... Full-Time Work

Not just a "boiler on wheels" but a sturdy, compact, steam generator built by specialists in steam generating equipment — the pioneers and originators of tank-car heaters and bituminous boosters. Design and construction provides maximum steaming capacity with lightest weight for easy portability. Available in three sizes, trailer or skid mounted — 1 car heater (17 bhp) — 2 car heater (28 bhp) — 3 car heater (42 bhp). Write for the catalog.

CLEAVER-BROOKS COMPANY
389 E. Keefe Ave., Milwaukee 12, Wis.

Get the complete facts on the only tank-car heaters built with the fuel saving four-pass flue travel construction—send for the Cleaver-Brooks Tank-Car Heater Catalog.

BUILT WITH THE FAMED
FOUR-PASS HIGH EFFICIENCY DESIGN OF

Cleaver-Brooks
STEAM BOILERS

Saving $75,000 on floor costs

A new departure in multistory steel building construction is the use of lightweight beams for floor joists. A pioneer in this use is the $4,500,000 eleven-story Marylander apartment house in Baltimore, Maryland.

Saving an estimated $75,000 under reinforced concrete and $45,000 under conventional steel design, the Marylander's design utilized so-called Junior Beams to obtain continuity over a system of steel girders at 12-ft spacing.

These lightweight beams are hot rolled from a single piece of homogeneous steel, and are uniform throughout. On this job, beams 6 in., 7 in. and 8 in. deep are used. Enclosed by a 2½-in. floor and a 1-in. ceiling they give an overall deck thickness of 9½ to 11½ in.

Lightweight-beam materials and erection costs are $8,000 per 36,360-sq ft floor. Each floor takes 43½ tons of the beams. These figures were supplied by the apartment's contractor, owner and designers.

• **Structural layout**—Floors are laid over tops of the supporting girders, and the girders are dropped down into the wall partitions. Continuous light-beam joists, up to 50 ft long in the floor construction, are supported by four girders over three continuous spans in some areas. Elsewhere beams are supported by three girders. Joist spacing is 1 ft 6 in. to 2 ft. Total steel weight, including 500 tons of the light beams, is 1,750 tons.

Continuity of joists reduced by 50% the number of pieces to be positioned during erection, compared to an arrangement calling for simply-supported joists of greater span.

Other advantages derive from the beams' use in mill stock lengths. The beam ends do not join, but rest side by side on support girders, permitting easy adjustment within fractional inches. Thus time-consuming shop detailing and shop fabrication were eliminated.

• **All-welded construction**—The American Bridge Co. erected the structural steel, using all-welded construction. Welding instead of riveting was chosen because the apartments are going up in a Baltimore residential district, where noise-reduction is desirable. Main-member connection was accomplished with the aid of a system of clips, developed by Baltimore consultant Van Rensselaer P. Saxe (ENR Sept. 8, 1949, p 25).

ALL-WELDED CONSTRUCTION began with main frame, connected by special clips. Continuous-beam joists, welded where they cross girders, support deck that is formed on wire-backed paper. Note adjustable steel bridging and conduit installation.

The building went up in three sections, worked on by three derricks. Bundles of the floor beams were spotted in each floor and positioned by hand.

Joists are welded to the tops of the girders with 2 in. welds along the flanges on both sides. The welds are designed to resist torsion. Rigid steel bridging is used for lateral stiffening.

• **Floor construction**—On top of the beams, wire-backed paper was laid, to form and reinforce a 2½-in. concrete slab. Electric conduit was laid over the beams and under the paper before the concrete was poured. Plumbing is arranged so that lateral pipes from risers run parallel with the joists and between them. Ceilings are of expanded metal lath spotwelded to the underside of the beam flanges and covered with 1 in. of vermiculite-gypsum plaster.

The Marylander apartment consists of 506 units, of which 336 are efficiency apartments, 98 are one-bedroom apartments, and 72 are two-bedroom units. Six elevators, two of which may be used for service as well as passengers, are being installed. Two-level garage areas in the basement and sub-basement will hold 280 automobiles.

The entire structure is reported to have unusual vibration-free rigidity. In addition it is highly fire resistant, impervious to termites, and vermin-proof. Completion for occupancy is expected by June, 1951.

The Marylander is the joint brainchild of Victor Frenkil, president of Baltimore Contractors, Inc., and J. H. Bodinger, president of The Marylander Apartments, Inc., builder. Hal A. Miller, Baltimore architect, has for associate on structural and mechanical design the firm of Candela & Resnick, New York. G. E. Carlstrand of Baltimore Contractors, working with Candela & Resnick, conceived and developed the idea of using the lightweight beams, which are manufactured by Jones and Laughlin Steel Corp., Pittsburgh, Pa.

Simple prestressing system for pedestrian bridge

PUTTING THE STRESS into California's first prestressed concrete bridge turned out to be very simple: The work was done by two men in what amounted to one day's working time.

Equipment was kept to a minimum, consisting mainly of a 25-ton jack mounted on a rough lumber frame with the necessary hydraulic pressure equipment. Jacking blocks and wedges were made of low-cost cast iron.

The bridge is a 110-ft span pedestrian bridge across the Arroyo Seco in Los Angeles (ENR Nov. 23, 1950, p 42). It consists of two 10-in. wide by 5-ft 8-in. deep girders with a 1-ft 8-in. wide, 9-in. thick top flange. These girders were precast at the site and moved into place by heavy cranes. The girders provide for an 8-ft walkway with a live load of 55 psf.

Each girder was prestressed with 125 wires, 0.25-in. dia. Prestress was applied by a method developed by the Prestressed Concrete Corp. of Kansas City, Mo. Walter Kaucher, Los Angeles, was general contractor, with the prestressing done as a subcontract. Low bid was $23,770 and this included a $5,000 item for prestressing.

• Economical procedure—The method used has the advantage that the prestressing blocks and wedges can be mass-produced of cast iron at a low cost. No expensive machining is necessary.

The wires were first cut to length and a button-type head was peened on each end by a machine developed by the prestressing subcontractor. This button rests against a ⅝-in. washer that in turn rests against the steel bearing plate or a stressing block, depending on the end of the girder involved. Tests indicated negligible creep in this fastening at 130% of design load.

The wires were inserted in 26-ga sheet metal casings to prevent bond with the concrete. The space around the wires was pressure grouted after stressing through 1-in. holes in the distribution plates.

Five wires at a time were threaded through 1x4-in. by 3½-in. deep cast-iron stressing blocks. After the concrete had reached its full strength of 5,000 psi, the stressing was undertaken by pulling on one block at a time. Some minor stressing was administered only two or three days after the concrete was poured to eliminate shrinkage cracks.

The mechanical equipment included a 25-ton hydraulic jack with hydraulic pressure developed by an electric motor. The hydraulic system included a gage to measure pressure applied, a pressure receiver and a relief valve to assure maintenance of constant pressure. A rubber-tire-mounted motor-generator set provided electric power for the pressure system.

The high tensile strength wires (220,000-psi ultimate strength) were stressed 10% in excess of the final 117,000 psi and held at that stress for 2 min.

After that the stressing blocks were released to rest on the wedges. Allowing for plastic flow and shrinkage, design stress in the steel is estimated at 102,000 psi.

Pressure in the hydraulic system during stressing was 746 psi. This pressure working against the 42-sq in. piston of the hydraulic jack stressed the wires 10% in excess of 117,000 psi. A gage on the system was used for control (in preference to pulling

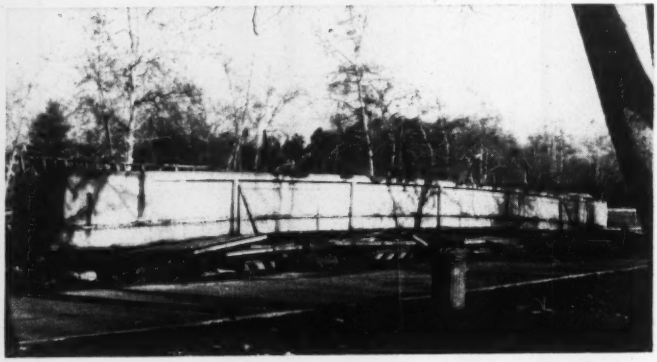

GIRDERS WERE PRECAST in a nearby park street. They were later lifted into place by heavy cranes.

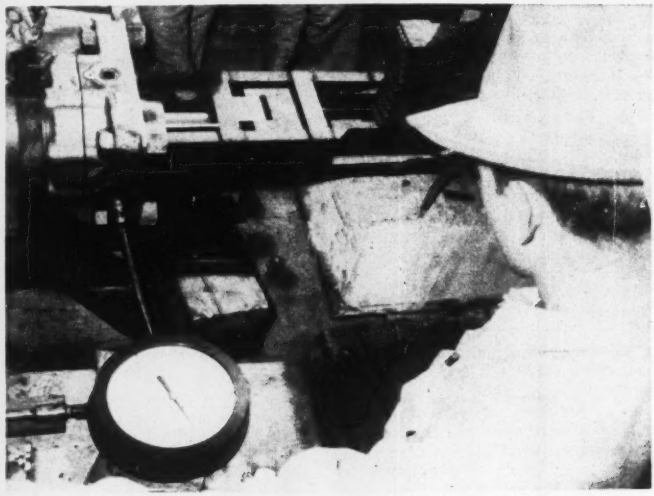

PRESSURE GAGE shows 746 lb, which working against the 42-sq in. piston of the hydraulic jack, stressed a single cluster's five ¼-in. dia wires 10% in excess of the 117,000-psi loading. This pressure was maintained for 2 min, after which the pressure was released and the stressing blocks allowed to rest on inserted wedges.

the wires out a certain distance as indicated by computed strain).

While the wires were being stressed, U-shaped cast-iron wedges were inserted between the stressing block and the distribution plate. Thus, the stretch in the wires is maintained by bearing pressure. The developers claim this has an advantage over other systems that use a friction wedge system to hold the wires in place.

Stressing five wires at a time requires only moderately large equipment as compared with the 12-wire Freyssinet system. Yet it is much faster than the 2-wire Magnel system.

• **Some bugs ironed out**—As is the case in any new mechanical process there were some bugs in the prestressing system. These were ironed out in the course of the work.

Failure of the jaws mounted on the stressing jack was one of the difficulties encountered. The original jaws used to pull the stressing blocks were only ¾ in. deep and were rigidly mounted. On pulling the first block, the jack was apparently not fully centered so that most of the force was on one jaw. This caused the block to shear and when the full prestressing load was imposed on the other jaw, it also broke.

This difficulty was remedied by making the jaws 1¼ in. deep and by mounting them on a series of three large diameter steel pins so the pull on each jaw would be automatically equalized.

Another apparent flaw in the system is that all blocks did not pull out the same amount. The blocks in the middle of each cluster achieved their full load with a deformation about 1 in. less than the 5¼ in. required for the blocks on the exterior of a cluster.

Opinion is divided regarding the cause of this. It could be a matter of geometry. That is, since all wires were cut to the same length, the flaring of the wires at the girder ends might cause a difference in elongation.

On the other hand, this might be explained by the soft steel spacers used inside the girder. These may have failed and in so doing gripped the wires in the middle of a cluster. This would have caused these wires to become fully stressed before full deformation was reached.

A safety factor is that the stressing force was measured as the wires were tensioned. Thus, the amount of stress in at least a portion of each five-wire group is definite, the developers claim.

Most other prestressing systems call for a specific deformation, but then they say, the stress in the wires cannot be accurately known.

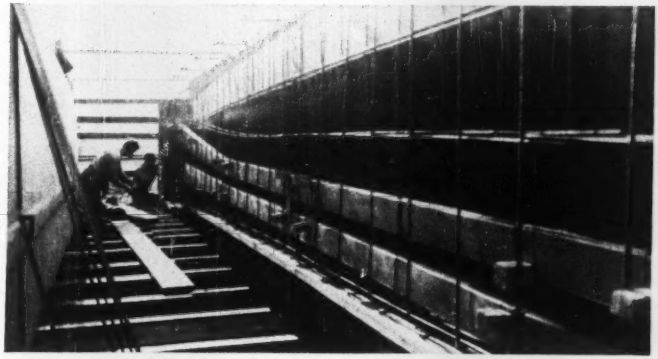

METAL BOXES of 26-gage steel encased the two groups of prestressed wire to keep them free of concrete. Grout was later placed around the wires.

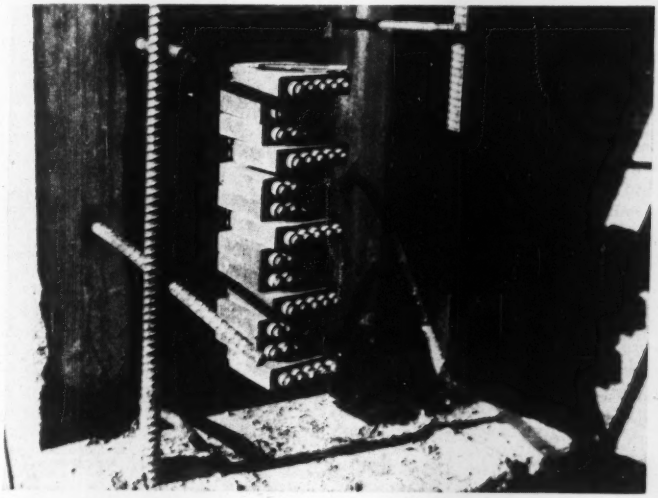

SOME WIRES were given a slight initial prestress as is shown here to minimize shrinkage cracks during concrete curing. Pencil on top of top block gives scale. After wires were prestressed and grout forced in around them, concrete was placed around the stressing block and wedge assembly.

• **Another difficulty**—Another minor failure developed when, on stressing one block, one of the wires broke. Close examination showed that this was due to a flaw in the wire. It is interesting to note that when the wire broke it shot some 60 ft out from the end of the girder. To protect bystanders, a 6x6 timber was lashed to the girder on the opposite end from where the prestressing was under way for the remainder of the tensioning.

• **Stress measured**—Since this is an experimental structure, seven Carlson strain gages were cast in each girder, three at mid-section and four at one of the quarter points. Readings were taken during various steps of the prestress work. These will be interpreted by members of the staff of the Institute of Transportation and Traffic Engineering at the University of California. It is hoped that analysis will help future prestress bridge design.

This structure is a project of the California Division of Highways under the direction of F. W. Panhorst, assistant state highway engineer in charge of bridge design and construction. Jack Sylvester was resident engineer on the work.

Prestressed Concrete Corp. was represented by T. J. Gut. This firm is established to sell wire, peening machines, washers and expert service. It hopes to encourage contractors all over the U. S. to use its patented prestressing system.

Portland, Ore., contractor reports:

Chas. T. Parker, of Parker-Schram Co., says: "On this 36" pipe line using Dresser Couplings, a foreman, crane operator, oiler and six-man crew were able to average 15 lengths per day, complete except for coating. This in spite of almost incessant heavy rains. Where ditch was available without obstruction, we were able to complete about five lengths per hour. We know of no better method of connecting lengths of pipe in a water line."

A Dresser-Coupled steel line delivers water cheaper

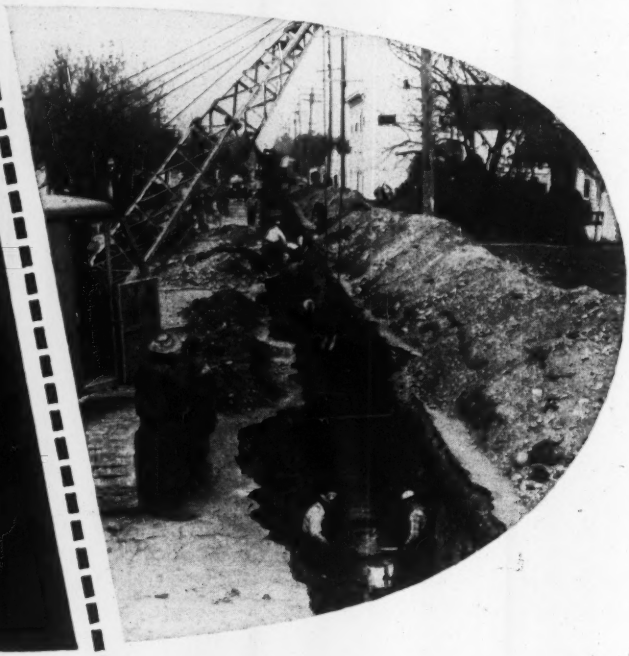

The cheapest way to deliver water to the place where it turns into revenue is with a Dresser-Coupled steel line—the line that cuts *installation* costs, *leakage* losses and *maintenance* costs.

As in the case of this Portland water main, construction of a Dresser-Coupled line keeps going despite adverse weather conditions. Because a wrench is the only tool needed to make joints, costly weather delays are minimized or eliminated. And, in good weather, this type of construction sets a pace no other method can equal. The line starts paying its way sooner.

Leakage losses are cut because Dresser Couplings stay "flexible-tight" for the life of the line. Controlled gasket pressure is provided by controlled bolt tightness around the joint.

Maintenance costs are reduced also. Dresser Couplings harmlessly absorb underground stresses; and modern glass-smooth pipe linings, undamaged in joining because there's no heat, assure sustained high carrying capacity.

From all standpoints, a Dresser-Coupled steel line gives you the ultimate in performance and economy. See your Dresser Sales Engineer or write our Bradford Office for literature.

BE SURE you get the best line at the best price. Put steel pipe and Dresser Couplings in your specifications.

DRESSER

"FLEXIBLE-TIGHT"

COUPLINGS

Dresser Manufacturing Division, 50 Fisher Ave., Bradford, Pa. (One of the Dresser Industries). Warehouses: 1121 Rothwell St., Houston, Texas; 101 S. Bayshore Highway, South San Francisco, California. Sales Offices: New York, Philadelphia, Chicago, Houston, South San Francisco. In Canada: 629 Adelaide Street, W., Toronto, Ontario.

BOOK REVIEWS

Ten years later

WATER QUALITY AND TREATMENT—Second Edition. 451 pp. A manual prepared by the American Water Works Association, 500 Fifth Ave., New York 18, N. Y. $5.

This second edition brings up to date a first edition published in 1940, which, in turn, replaced a manual produced another 15 years earlier. The manual evidences AWWA's constant endeavor to make available a complete guide to the latest in water treatment.

Preparation of the text was a committee function depending entirely upon voluntary services of some 30 individuals well qualified to write on the various phases of water purification.

Important new material included in this edition is to be found in the portions on disinfection and on fluoridation.

A new look at toll roads

TOLL ROADS AND THE PROBLEM OF HIGHWAY MODERNIZATION — By Wilfred Owen and Charles L. Dearing. 204 pp. Published by the Brookings Institution, 722 Jackson Place, Washington 25, D. C. $2.50.

This little book should be read by all who are interested in financing highway construction. The authors have been intimately associated with highway-finance developments for a long time. Their discussion of the controversial question of toll roads as an element of the highway problem is factual and dispassionate.

This discussion covers the whole field of providing the funds necessary to the building of an adequate system of highways. It points to the weaknesses in state and federal road-financing methods, which lead to a revival of toll roads. "Reappearance of the toll gate," they say, "is evidence that traditional methods of financing highways have proved inadequate to meet the needs of today's traffic."

The basic weaknesses of the present methods of financing are that the states tend to spread their funds on a regional basis rather than on the basis of need, and the formula under which federal aid is distributed bears no relation to the amount of money each state needs to modernize its part of the interstate system.

Because of the improbability of being able to make the radical change in state and federal road-financing methods that would be required by an adequate modernization program, the authors state that "toll financing appears to be the only ready solution for urgent highway needs." They add that such financing only should be applied to projects that show promise of being a financial success.

Pending a complete change in federal policy, the authors suggest "amendment to the federal-aid road act to allow charging direct tolls on highways constructed or reconstructed with the aid of federal funds." This is in line with proposals made by this journal last year in recommending that federal toll-road policy be restudied (ENR March 30, 1950, p. 26).

Surveying fundamentals

PLANE SURVEYING—By Frank R. Theroux and Lisle A. Smith. 338 pp. Pitman Publishing Corp., New York. $3.50.

The surveying teacher who wants his students to be distracted as little as possible by "handbook" information will find this book useful. Its 200-odd pages of text cover plane surveying procedures from line-measurement to simple curves and earthwork (plus land surveying and instrument adjustment). The remainder of the book is occupied by tables.

Details are devoted to the basic operations. Some topics, such as errors in linear measurements, are covered in bare outline, so that the ambitious teacher is left free to expand in his own way.

As implied above, this is a text for a college course in elementary surveying, not a reference manual for the practicing surveyor. Perhaps it should receive special consideration for use in junior-college courses and in courses for non-civil engineers.

Conference product

ENGINEERING HYDRAULICS—Edited by Hunter Rouse. 1,039 pp. John Wiley & Sons, New York; Chapman & Hall, London. $15.

It is not just by chance that the proceedings of the Fourth Hydraulic Conference, Iowa Institute of Hydraulic Research, turn out to be this comprehensive reference work in the applied science of hydraulics. Organizers of the June, 1949, conference planned it that way.

Institute staff members recognized the need for a thorough presentation of principles of hydraulic design and set as goal of their fourth triennial session the production of just that. They decided upon 13 inter-related subjects, which ultimately were to become the subjects for chapters in the book, and then invited an authority in each subject to write a chapter. At the 1949 conference, preprints of the chapters were critically discussed by other hydraulic specialists and commented on by those in attendance.

This concerted review of the book, chapter by chapter, was largely coordinated by Boris A. Bakhmeteff, and it is to him the volume is dedicated.

The finished product has in it the best thinking of over 400 engineers who attended the conference, of the official reviewers and of 13 well-chosen authorities on the subjects embraced. There is an engaging chapter on models entitled "Hydraulic Similitude" by J. E. Warnock, who passed away before publication of the work. G. R. Williams' chapter on hydrology is a good, simple statement of the principles. A discussion of floods by B. R. Gilcrest gives the latest in devices for forecasting and routing.

Other subjects include: flow and its measurement, in the ground, in pipes and in channels; wave motion; sedimentation; hydraulic machinery. Other authors: J. W. Howe, C. E. Jacob, V. L. Streeter, J. S. McNown, A. T. Ippen, C. J. Posey, G. H. Keulegan, C. B. Brown, J. W. Daily and Hunter Rouse. To the last named, as editor, goes credit for organization and correlation of the joint effort.

Air mapping data revised

ENGINEERING SURVEYS, ELEMENTARY AND APPLIED—Second Edition. By Harry Rubey, George Edward Lommel, and Marion Wesley Todd. 893 pp. Macmillan Co., New York. $5.00.

ADVANCED SURVEYING—SECOND EDITION, By W. H. Rayner. 369 pp. D. Van Nostrand Co., New York. $4.50.

Those who are familiar with "Engineering Surveys," the excellent manual of elementary and advanced surveying practices by Rubey, Lommel and Todd, will find the 1950 revised edition unchanged in most respects. One major new feature is noteworthy. It is the chapter on photogrammetry, which has been enlarged, revised and brought up to date by H. O. Sharp of Rensselaer Polytechnic Institute.

In 112 pages Professor Sharp describes the tools of aerial map making, the mathematical, optical and stereoscopic principles, the procedures, and the methods of providing ground control.

Altogether the photogrammetry chapter looks like a manageable unit for inclusion in an advanced surveying course. It also would be useful to the older surveyor who feels a need for greater familiarity with this dynamic branch of surveying.

Another revision appears in the

chapter on land surveys. Changes are based on the 1947 revision of the Manual of Instructions for the Survey of Public Lands in the United States, issued by the U. S. Bureau of Land Management.

Photogrammetry also is brought up to date in Professor Rayner's book. Here the emphasis is on analytical principles of making maps from photographs already obtained. Picture-getting and making, as well as the mechanical tools (camera, plotters, etc.), get secondary attention, it being the author's intention to concentrate on theory and applications that can be taught with inexpensive equipment.

An outstanding feature of this edition, carried over from the first, is Professor Rayner's remarkably lucid discussion of errors. He leads off with a chapter on the subject, then plays up the importance of errors wherever appropriate in subsequent chapters. The emphasis on the nature of errors is especially useful in an understanding of his material on adjustments of survey data.

A sanitation primer

THE PRACTICE OF SANITATION—By Edward S. Hopkins and Francis B. Elder. 423 pp. The Williams & Wilkins Company, Baltimore 2, Md. $7.50.

A readable reference on all phases of environmental sanitation for use of doctors, nurses and students of sanitary engineering and public health was the aim of the authors in preparing this elementary text. It might also be a handy reference for the engineer not directly involved or fully informed on sanitary engineering matters.

Viewing each subject chiefly from the public health aspect, the authors discuss in detail without technology: water supply, sewage and refuse disposal, water and air pollution, swimming pool and food sanitation, rodent control and the administration of sanitation programs.

Central Valley project

THE CENTRAL VALLEY PROJECT AND RELATED PROBLEMS—148 pp., paperbound, Oct. 1950 issue of California Law Review, Boalt Hall of Law, Berkeley 4, Calif., $1.50.

Here is a collection of six essays summarizing problems, legal and otherwise, that have developed in connection with California's Central Valley project. Because of the complexity of such questions as the 160-acre limitation, water rights, and federal vs. private power development, it is not possible to summarize these articles in a few short paragraphs.

These essays present relatively impartial analyses of the problems—presenting them in such a way that the reader can draw his own conclusions as to the right and wrong of each. This is a service to those interested in water resource development and its complexities.

Authors of the essays are: S. T. Harding, consulting civil engineer, Berkeley; Edward F. Treadwell, member of the San Francisco Bar; Leland O. Graham, regional counsel, Bureau of Reclamation, Sacramento; William B. Kuder, associate attorney, Pacific Gas and Electric Co.; Edison Abel, California Farm Bureau Federation, and Arthur A. Maass, assistant professor of government, Harvard University.

New Engineering Books

ROUTE SURVEYS—By Harry Rubey. Revised edition. 282 pp. Macmillan Co., New York 11. $5.25.

THE KENTUCKY PROJECT—Technical Report No. 13, Tennessee Valley Authority. 877 pp. Superintendent of Documents, Washington 25, D. C. $3.25.

STRENGTH OF MATERIALS—By Ferdinand L. Singer. 469 pp. Harper & Bros., New York 16. $5.00.

CITIES AND TOWNS OF ILLINOIS—By Karl B. Lohmann. 110 pp. University of Illinois Press, Urbana, Ill. $2.50.

CONCRETE PIPE HANDBOOK—373 pp. American Concrete Pipe Assoc., 228 No. La Salle St., Chicago 1. $4.00.

HIGHWAY ENGINEERING—By L. J. Ritter, Jr. and R. J. Paquette. 721 pp. The Ronald Press Co., 15 E. 26th St., New York 10. $6.50.

PLANT LAYOUT—PLANNING AND PRACTICE—By Randolph W. Mallick and Armand T. Gaudreau. 391 pp. John Wiley & Sons, New York 16; Chapman & Hall, London. $7.50.

MCMICHAEL'S APPRAISING MANUAL—By Stanley L. McMichael. Fourth edition. 731 pp. Prentice-Hall, New York. $5.35.

THE DESIGN OF PRISMATIC STRUCTURES—By A. J. Ashdown. 65 pp. Concrete Publications Ltd., 14 Dartmouth St., London, S.W. 1, Eng. $1.85.

INDUSTRIAL HEALTH AND MEDICAL PROGRAMS—Public Health Service Publication No. 15. 397 pp. Superintendent of Documents, Washington 25, D. C. $1.00.

DIMENSIONAL ANALYSIS AND THEORY OF MODELS—By Henry L. Langhaar. 166 pp—John Wiley & Sons, New York 16; Chapman & Hall, London. $4.00.

FLUID MECHANICS—By Victor L. Streeter. 366 pp. McGraw-Hill Book Co.; New York 18, Toronto, London. $5.00.

MANUAL OF GEODETIC TRIANGULATION—By F. R. Gossett. Special publication No. 247. 344 pp. Superintendent of Documents, Washington 25, D. C. $1.50.

TOLL ROADS AND THE PROBLEM OF HIGHWAY MODERNIZATION — By Wilfred Owen & Charles L. Dearing. 204 pp. The Brookings Institution, 722 Jackson Place, N.W. Washington 6, D. C. $2.50.

MANUAL FOR WATER WORKS OPERATORS Prepared by Texas Water Works & Sewerage Short School; Texas State Department of Health, Austin, Texas.

MANUAL OF BRITISH WATER SUPPLY PRACTICE—Compiled by The Institution of Water Engineers. 910 pp. W. Heffer & Sons Ltd., Cambridge, England, 50s. Obtainable through Stechart-Hafner Inc., 31 East 10th St., New York 10, N. Y.

PRESTRESSED CONCRETE—Second edition. By Gustave Magnel. 300 pp. Concrete Publications Ltd., 14 Dartmouth St., Wesminster, S.W. 1, England. 15s. Obtainable through Stechart-Hafner Inc., 31 East 10th St., New York 10, N. Y.

Reports and Pamphlets

METHOD TO INCREASE RIGIDITY IN TORSION OF DOUBLE-FLANGED BEAMS—Bulletin No. 8. Division of Building Statics and Structural Engineering, Royal Institute of Technology, Stockholm, Sweden.

PUMICE AS AGGREGATE FOR LIGHTWEIGHT STRUCTURAL CONCRETE — Publication No. 5. University of New Mexico, Albuquerque, N. M.

THE IDENTIFICATION OF ROCK TYPES—Bureau of Public Roads, Supt. of Documents, Washington 25, D. C. 10c.

SEAPLANE FACILITIES—Civil Aeronautics Administration, U. S. Dept. of Commerce, Washington 25, D. C. Price 25c.

PROCEEDINGS OF THE FIFTH INDUSTRIAL WASTE CONFERENCE, HELD AT PURDUE UNIVERSITY NOVEMBER 29-30, 1949—Extension Series No. 72. Purdue University, Lafayette, Indiana.

RECOMMENDATIONS — EARTHQUAKE RESISTANT DESIGN OF BUILDINGS, STRUCTURES AND TANK TOWERS—No charge but distribution limited to those directly engaged in design of structures. Pacific Fire Ratng Bureau, 465 California St., San Francisco 4, Calif.

Get Plasteel

ROOFING and SIDING

Triple PROTECTED STEEL

PROTECTION NOW!

Let us QUOTE you from STOCK

MICA *makes the* **DIFFERENCE**

Mica makes a BIG difference! And experienced engineers, contractors and maintenance men know that PLASTEEL — *and only Plasteel* — gives them this BIG difference — MICA'S permanent protection! Mica resists the toughest climatic and atmospheric conditions. Mica needs no paint, no repairs. Mica reflects solar rays. Mica is attractive. Mica prolongs the life of your buildings. Write for details.

PLASTEEL
PRODUCTS CO.
WASHINGTON, PENNSYLVANIA
Offices in principal cities

PLASTEEL PRODUCTS CO.
WASHINGTON, PENNSYLVANIA

We are interested in Plasteel Roofing and Siding. Please send details checked:

☐ Engineer's Handbook ☐ Sample of Plasteel

Company Name .....

Attention of ..... *Title* .....

Street Address ..... *Box No.* .....

City ..... *State* .....

in 1582 when this machine pumped London's Water

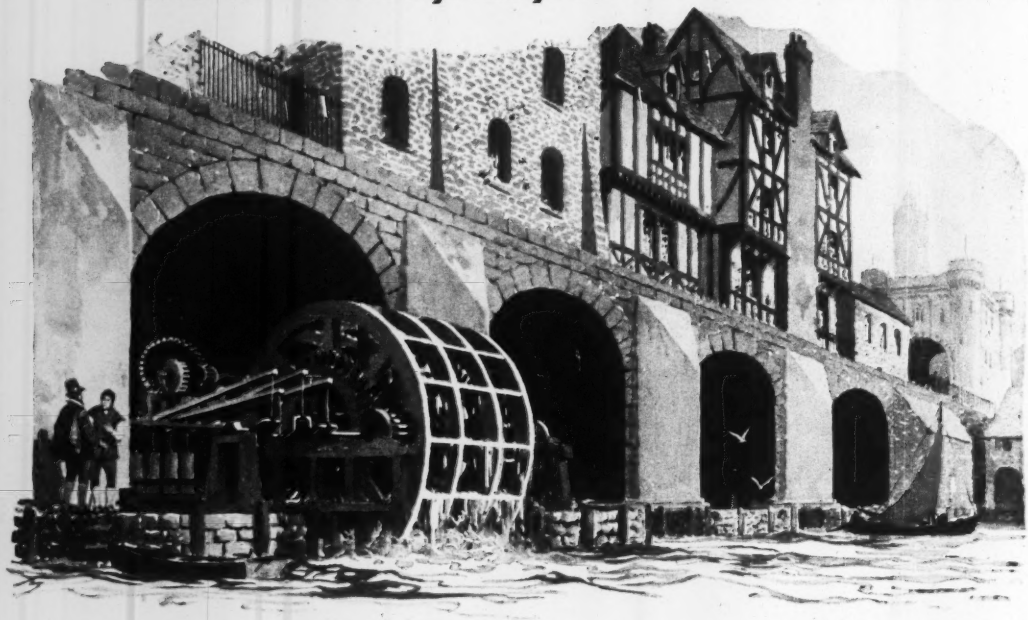

SKIP the centuries!

In this country alone there are systems that would shame London's great contribution, even in our smallest towns.

A Parade of Progress in which Smith Rotovalves and Axial Flow Pumps have marched in the very forefront! Good reason for putting your hydraulic problem in our hands, isn't it?

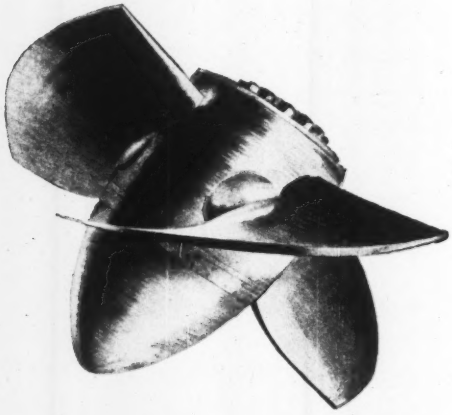

S. MORGAN SMITH Co.

YORK. PENNA. U.S.A.

READER COMMENT

Full speed ahead

Sir: How come, gentlemen, your editorial in the March 22 issue, entitled "Reconsider Pollution Abatement?" Who besides you says that pre-emergency issued orders should be immediately reconsidered? Not the National Production Authority, so far as I know, or the Public Health Service, or the AGC.

And can you assure our commission, our cities and industries that "considerable savings" will accompany such delays? Your past construction cost indices, WW I to now, don't back up that statement.

Still suffering from pollution as we are in Michigan, as the result of WW II where 27% of all war material was turned out and new populations cared for and already more defense contracts daily, we'd be sunk if the commission followed your advice. Better to go down working for pollution control where it's needed now than to just throw up the sponge.

ENGINEERING NEWS-RECORD, for once in my life, I'm ashamed of you! A quitter you are, in time of stress, unless you have something to lay on the line.

MILTON P. ADAMS
Executive Secretary
Water Resources Commission
State of Michigan
Lansing, Mich.

Discretion might still be the better part of valor, as the editorial suggested in urging that projects be carefully measured as to their necessity and contribution to the defense effort.—EDITOR.

Sir: I was shocked to read Engineering News-Record's editorial on pollution abatement in the March 22 issue. This certainly is not the kind of leadership which I have always associated with ENR. One expects some hysteria over the problems of civil defense and production for mobilization but hardly from ENR.

Water is a limited natural resource of vital importance for the defense effort in the present and future productive capacity of America. It must be used intelligently without abuse or waste. Over the past fifty years, pollution has made heavy inroads on natural water resources and we are now just beginning to recognize and face up to our responsibilities with respect to pollution abatement. It would, indeed, be a major national disaster if we were to follow the short-sighted policy proposed in ENR.

As General Marshall has reiterated, whether the war be hot or cold, we are definitely in for a long pull. In the next 10 to 20 years, we face the absolute necessity of substantial increases in our productive capacity, not only for mobilization but also for the normal increases of civilian needs. The distinction in the long pull between what is designated as civilian need from that designated for military purposes is rather academic. We need increased production capacity all along the line and this means a tremendous increase in demand for industrial water supply. Along with the increased production must go a continuing effort toward abatement of pollution and rational utilization of water resources within the limitations of the national purification capacities of our streams.

I sincerely hope that Engineering News-Record will reconsider its editorial of March 22 and present the true situation for the long pull. Unfortunately, there are always some municipalities and industries who are looking for an excuse for delay, but I think you will find on closer analysis that your editorial is not in line with the better thinking among responsible governmental and industrial minds.

C. J. VELZ
Professor and Chairman
Dept. of Public Health Statistics
University of Michigan
Ann Arbor, Mich.

Deep bridge piers

Sir: In reading your article (ENR March 29, p. 98), under bridges, regarding the Geo. P. Coleman Memorial Bridge over York River, you state—"Depth of caissons in water—as much as 80 feet—was exceeded only by the depth of one of the piers at San Francisco. It was sunk through not only 80 feet of water but also 70 feet further into the river bottom."

In addition to the San Francisco-Oakland Bay Bridge pier it may be noted that Pier 5 of the Tacoma Narrows Bridge with a caisson 64′ 6″ x 117′ 6″ base dimension was landed on the bottom in 120 feet of water with a maximum tidal velocity of 8 mph. Pier 4 of the same dimension was landed in approximately 118 feet of water with a maximum tidal velocity of approximately 6 mph.

CHAS. E. ANDREW
Chief Consulting Engineer
Washington Toll Bridge Authority
Olympia, Wash.

FOUNDATIONS OF STRUCTURES

1. Here are sound instructions on every phase of foundation engineering—from how to gather and interpret soil data, and how to plan the support of a structure, to how to handle the construction of that foundation. Describes all types of foundations, and gives examples of some actual substructures. By Clarence W. Dunham, Professor of Civil Engin., Yale U. 689 pages, 464 illus., $7.50

LIVING MATHEMATICS

2. Math has humor, zest, challenge and human interest, as proven in this easy-to-read book. Designed for those who never got beyond arithmetic, it reviews algebra, trigonometry, analytic geometry, and calculus. Includes an improved treatment of fractions, exponents, and radicals. Hundreds of practice problems. By Ralph S. Underwood and Fred W. Sparks. 2nd Edition. 336 pages. $4.50

REINFORCED CONCRETE AND MASONRY STRUCTURES

3. Offers practical and detailed discussions of every important element entering into the design and construction of concrete and masonry structures. Covers preparation and placing of concrete forms for concrete-finishing concrete surfaces and waterproofing. Takes up retaining wall design, slab and girder bridges, hydraulic structures, estimating concrete costs, etc. Editors-in-Chief, George A. Hool and W. S. Kinne. Revised by R. R. Zipprodt, Principal Civil Eng., Office of The Quartermaster General, Wash., D. C. 2nd Ed. 835 pages, 499 illus., $8.00

MECHANICAL ENGINEERS' HANDBOOK

Just Out—New 5th Edition

4. Fifth Edition of Marks' Handbook gives 16 completely revised and modernized sections covering every phase of mechanical engineering from aeronautics to mechanical refrigeration. From metal-cutting machining to hoisting and conveying. Brings you many advances in theory, processes, materials, and power; a reference on both routine and complicated problems. By Lionel S. Marks, Gordon McKay, Prof. of Mech. Engr., Emeritus, Harvard Univ. 5th Edition. 2236 pages, 2000 illus., $15.00

SEE THESE BOOKS 10 DAYS FREE

McGRAW-HILL BOOK CO.,
330 W. 42nd St., N.Y.C. 18, N.Y.

Send me book(s) corresponding to number encircled below for 10 days examination approval. In 10 days I will remit for books I keep, plus few cents for delivery, and return unwanted book(s) postpaid. (We pay for delivery if you remit with this coupon; same return privilege.)

1 2 3

4 (Payable $3.00 in 10 days and $3.00 monthly.)

(Print)
Name .....
Address .....
City ..... Zone .... State .....
Company .....
Position NR-5-10

This offer applies to U. S. only

Piles go down, down, down—double quick—under the powerful, positive impact of Super - Vulcan. Delivering twice as many blows per minute, it rams piles through dense soil while using 25 to 35 per cent less steam. At the same time, Super-Vulcan's low-velocity impact keeps pile heads damage-free.

This mighty hammer's sure, hard-hitting power gives penetration-plus, whether it's driving wood, concrete or pipe piles, steel sheeting or H beams. For unmatched versatility, it fits the same leads, uses the same accessories as Vulcan Single-Acting pile hammer.

Ease of operation, durability, compactness, minimum maintenance, dependability always—you get all these with Super-Vulcan. Write for details today.

Sizes: 18C—30C—50C—80C meet all needs

VULCAN IRON WORKS Since 1852
331 North Bell Avenue
Chicago 12 ---Illinois

MUNICIPAL AFFAIRS

MAGNIFICENT BACKGROUND—Set in an area of superb mountains are the city of Vancouver and its harbor which is the largest and most used on Canada's Pacific coast.—(Photo Survey Corp. Ltd.)

Vancouver, Canada's 3d largest city

Vancouver, B.C., on Canada's west coast, probably has seen greater municipal growth than any other Canadian city in the postwar years. There has been a major trek from all parts of Canada to Vancouver since 1945, and this has resulted in the city's growth from fourth largest Canadian city to third position with close to 600,000 population in its metropolitan area. This growth is reflected in municipal planning and building permits.

Vancouver last year spent $8,429,000 on capital expenses, the largest amount ever spent in a single year. This year the city has an even larger list of improvements planned, including a new bridge to cost more than $6,000,000 for the structure alone, a new dam for the water board to cost about $6,000,000, with possibly another $5,000,000 to be spent on new civic buildings, including a police station, and an auditorium and civic center. The new Granville Street bridge is expected to call for another $12,000,000 to be spent on approaches and land purchases. The Capilano Dam project is expected to cost about $8,000,000 to complete. Contractors' bids for the structure are about $6,000,000.

Vancouver is a major shipping center. Surrounded by snowcapped mountains, its harbor is secluded but visible from most parts of the city. Vancouver is the port of almost all Canadian trans-Pacific trade, the center of a flourishing lumbering industry, and has in the postwar years become an important small industries area. About half of the population of the entire province of British Columbia, with

(*Continued on page 51*)

IT ALWAYS PAYS TO SPECIFY

LADISH

Controlled Quality

PIPE FITTINGS

...When you judge by Operating Statements

Maximum strength and endurance to minimize shutdown losses and replacement costs... these are important operating economies you can trace directly to the laboratory safeguards of Ladish Controlled Quality. Advanced metallurgical controls over materials and forging methods assure complete dependability in every Ladish fitting.

L

TO MARK PROGRESS

THE COMPLETE *Controlled Quality* FITTINGS LINE
PRODUCED UNDER ONE ROOF...ONE RESPONSIBILITY

LADISH CO.

CUDAHY, WISCONSIN
MILWAUKEE SUBURB

District Offices: New York • Buffalo • Pittsburgh • Philadelphia • Cleveland • Chicago • St. Paul
St. Louis • Atlanta • Houston • Tulsa • Los Angeles • Havana • Toronto • Mexico City



FIRE-SAFE
Exterior or Interior
WALLS...

...Erected Fast and Built to Last with
KAYLO LAMINATED PANELS

Here's the modern way to build better curtain walls or interior partitions, *and* with an available material —Kaylo Laminated Panels. In one operation, 32 square feet of strong, insulating, fire-safe wall goes into place.

Kaylo Laminated Panels have a core of calcium silicate (not glass)—a remarkable chemical compound which is completely inorganic and incombustible. The Kaylo core is securely bonded to facings of cement-asbestos with a waterproof adhesive. Installed with proper joint systems, the Kaylo Laminated Panels meet ASTM one-hour fire standards.

Although Kaylo Laminated Panels are lightweight (only 6¼ pounds per square foot), they have exceptional strength, dimensional stability and resistance to impact. They are rotproof, vermin-proof and resist water damage. Kaylo Laminated Panels are only 2 inches thick yet they give better heat insulating value than 16 inches of solid concrete.

Kaylo Laminated Panels may be attached to either steel or wood framing. They can be sawed, nailed or drilled with standard tools. Kaylo Laminated Panels provide better walls, reduced building load, increased floor space and easier erection for nearly every type of building.

WEIGHT AND INSULATING VALUES COMPARED WITH OTHER WALLS

	U-FACTOR (Btu sq ft hr. F.)	WEIGHT (lb sq ft)
2" KAYLO LAMINATED PANELS WITH CEMENT ASBESTOS FACING	.30	6¼
8" SOLID BRICK	.50	84
8" HOLLOW CINDER BLOCK	.42	30

See our CATALOG in SWEET'S FILE

For complete details on Kaylo Insulating Roof Tile, write Dept. N-142, Owens-Illinois Glass Company, Kaylo Division, Toledo 1, Ohio.

KAYLO ...first in calcium silicate

...pioneered by OWENS ILLINOIS Glass Company

MAIN OFFICE: Toledo 1, Ohio — KAYLO SALES OFFICES: Atlanta · Boston · Buffalo · Chicago · Cincinnati · Cleveland · Detroit
Houston · Minneapolis · New York · Oklahoma City · Philadelphia · Pittsburgh · St. Louis · Washington

an area about that of the states of Texas and Wyoming combined, lives in Vancouver. The scarcely explored interior of British Columbia has a very sparse population. Most of the province's population not living in Vancouver lives in Victoria on Vancouver Island, and in the area immediately north of the states of Washington, Idaho and Montana.

Building permits in Vancouver last year totalled $54,281,222, as compared with $48,707,667 in 1949. A large share of this construction went into housing for the growing population and also for the many small new industries which have started up there in recent years. Statistics show that of 260 new industries incorporated in British Columbia in 1950, more than half, or 153, were located in Vancouver. In 1949 a total of 129 new industries were located in Vancouver out of 200 incorporated in the province. These range all the way from swim suit factories to new furniture plans, new lumbering and paper industries, shipyards and fisheries.

Standard school plan adopted by Columbus

The Board of Education of Columbus, Ohio, will use a standard plan for the city's new elementary schools. It is expected to save much time in getting new work started.

The one-story plan worked out by Edward Kromer, school architect and structural engineer, calls for a minimum use of defense priority materials.

The basic structure is a foreshortened T-shape, with classrooms extending three ways from a central corridor and lobby, flanked on one side by a library and teachers' room, and on the other by the principal's office and the health room. At one end of the building at the front will be a multi-purpose room for lunches, meetings, audio-visual work, assemblies, etc.

General design is such that classrooms may be added or taken away as enrollment needs dictate. First of the schools to be built under this master plan will be the Oakland Park School for which bids will be opened June 1.

Water supply in the news

More fluoridation—The San Francisco Board of Supervisors has approved an experimental program to treat the water used by almost half the population of the city. The plan calls for installing about $30,000 worth of machinery for fluoridation of water of one reservoir. The health department has prescribed one part sodium

(Continued on page 52)

Driving Long Piles

ON A FOUR TO ONE BATTER *for the first time*

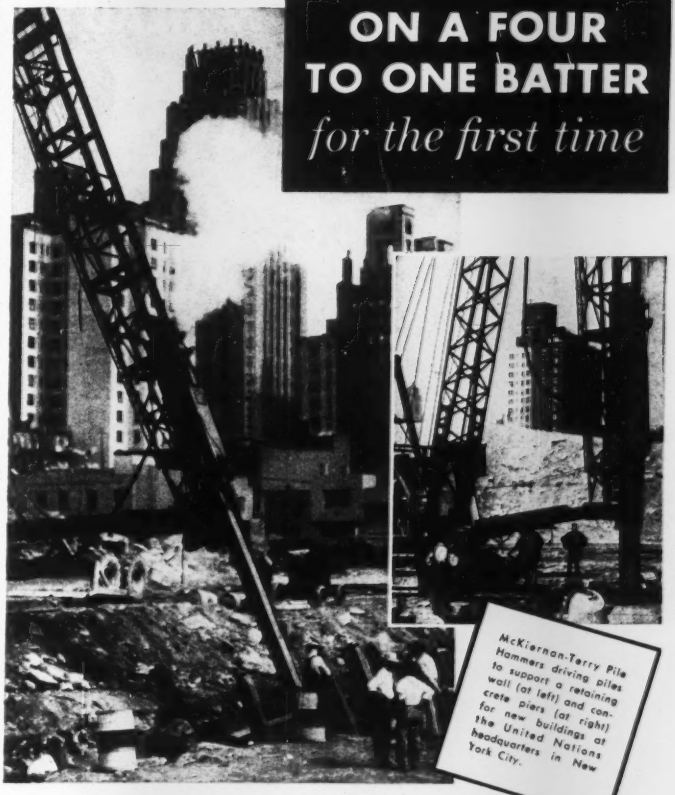

McKiernan-Terry Pile Hammers driving piles to support a retaining wall (at left) and concrete piers (at right) for new buildings at the United Nations headquarters in New York City.

Steel H-piles were driven to bedrock on an unprecedented 4 to 1 batter by the Walsh Construction Company on this United Nations project. Naturally the contractor chose a powerful McKiernan-Terry Pile Hammer for this tough job. • Despite the extremely flat batter, a McKiernan-Terry Single-Acting S-5 Hammer speedily and satisfactorily drove piles up to 108 feet in length. The hammer overcame such obstacles as boulders, rock, timber cribbing, old wharves and even sunken wooden ships on this filled-in river strip. In addition, a McKiernan-Terry Single-Acting S-8 Hammer and the S-5 were used to drive approximately ' vertical steel piles. • This is more proof that dependable McKiernan-Terry equipment takes even the difficult jobs "in stride". Write for bulletin giving full details.

GRAB BUCKETS



McKIERNAN-TERRY CORPORATION, MANUFACTURING ENGINE
Plants: Harrison, N. J., and Dover

FIRE-SAFE
Exterior or Interior
WALLS...

...Erected Fast and Built to Last with
KAYLO LAMINATED PANELS

Here's the modern way to build better curtain walls or interior partitions, *and* with an available material —Kaylo Laminated Panels. In one operation, 32 square feet of strong, insulating, fire-safe wall goes into place.

Kaylo Laminated Panels have a core of calcium silicate (not glass)—a remarkable chemical compound which is completely inorganic and incombustible. The Kaylo core is securely bonded to facings of cement-asbestos with a waterproof adhesive. Installed with proper joint systems, the Kaylo Laminated Panels meet ASTM one-hour fire standards.

Although Kaylo Laminated Panels are lightweight (only 6¼ pounds per square foot), they have exceptional strength, dimensional stability and resistance to impact. They are rotproof, vermin-proof and resist water damage. Kaylo Laminated Panels are only 2 inches thick yet they give better heat insulating value than 16 inches of solid concrete.

Kaylo Laminated Panels may be attached to either steel or wood framing. They can be sawed, nailed or drilled with standard tools. Kaylo Laminated Panels provide better walls, reduced building load, increased floor space and easier erection for nearly every type of building.

WEIGHT AND INSULATING VALUES COMPARED WITH OTHER WALLS

	U-FACTOR (Btu sq ft hr. F.)	WEIGHT (lb. sq. ft.)
2" KAYLO LAMINATED PANELS WITH CEMENT ASBESTOS FACING	.30	6¼
8" SOLID BRICK	.50	84
8" HOLLOW CINDER BLOCK	.42	30

SEE OUR CATALOG in SWEET'S FILE

For complete details on Kaylo Insulating Roof Tile, write Dept. N-142, Owens-Illinois Glass Company, Kaylo Division, Toledo 1, Ohio.

KAYLO® ...first in calcium silicate

...pioneered by OWENS (I) ILLINOIS Glass Company

MAIN OFFICE: Toledo 1, Ohio — KAYLO SALES OFFICES: Atlanta · Boston · Buffalo · Chicago · Cincinnati · Cleveland · Detroit
Houston · Minneapolis · New York · Oklahoma City · Philadelphia · Pittsburgh · St. Louis · Washington

an area about that of the states of Texas and Wyoming combined, lives in Vancouver. The scarcely explored interior of British Columbia has a very sparse population. Most of the province's population not living in Vancouver lives in Victoria on Vancouver Island, and in the area immediately north of the states of Washington, Idaho and Montana.

Building permits in Vancouver last year totalled $54,281,222, as compared with $48,707,667 in 1949. A large share of this construction went into housing for the growing population and also for the many small new industries which have started up there in recent years. Statistics show that of 260 new industries incorporated in British Columbia in 1950, more than half, or 153, were located in Vancouver. In 1949 a total of 129 new industries were located in Vancouver out of 200 incorporated in the province. These range all the way from swim suit factories to new furniture plans, new lumbering and paper industries, shipyards and fisheries.

Standard school plan adopted by Columbus

The Board of Education of Columbus, Ohio, will use a standard plan for the city's new elementary schools. It is expected to save much time in getting new work started.

The one-story plan worked out by Edward Kromer, school architect and structural engineer, calls for a minimum use of defense priority materials.

The basic structure is a foreshortened T-shape, with classrooms extending three ways from a central corridor and lobby, flanked on one side by a library and teachers' room, and on the other by the principal's office and the health room. At one end of the building at the front will be a multi-purpose room for lunches, meetings, audio-visual work, assemblies, etc.

General design is such that classrooms may be added or taken away as enrollment needs dictate. First of the schools to be built under this master plan will be the Oakland Park School for which bids will be opened June 1.

Water supply in the news

More fluoridation—The San Francisco Board of Supervisors has approved an experimental program to treat the water used by almost half the population of the city. The plan calls for installing about $30,000 worth of machinery for fluoridation of water of one reservoir. The health department has prescribed one part sodium

(Continued on page 52)

Driving Long Piles

ON A FOUR TO ONE BATTER *for the first time*

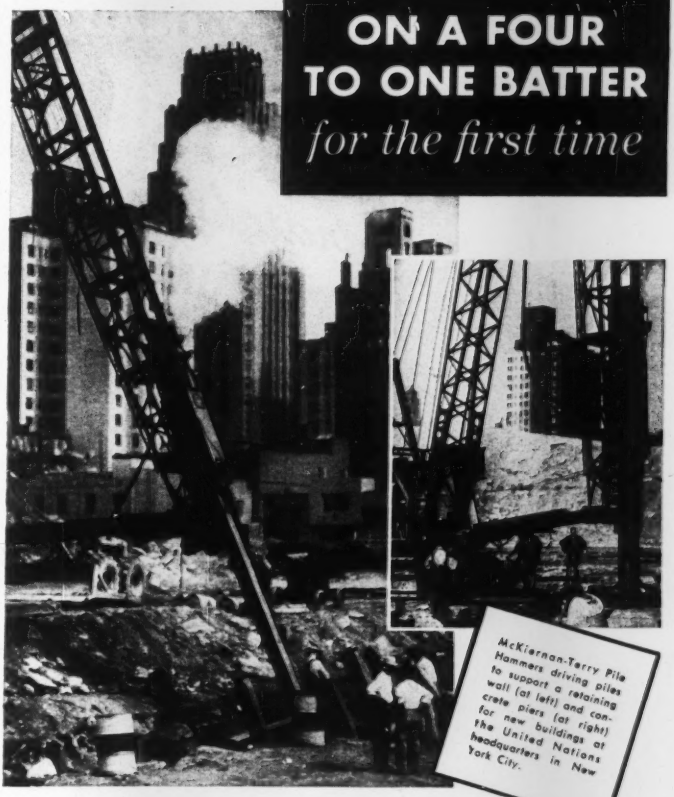

McKiernan-Terry Pile Hammers driving piles to support a retaining wall (at left) and concrete piers (at right) for new buildings at the United Nations headquarters in New York City.

Steel H-piles were driven to bedrock on an unprecedented 4 to 1 batter by the Walsh Construction Company on this United Nations project. Naturally the contractor chose a powerful McKiernan-Terry Pile Hammer for this tough job. • Despite the extremely flat batter, a McKiernan-Terry Single-Acting S-5 Hammer speedily and satisfactorily drove piles up to 108 feet in length. The hammer overcame such obstacles as boulders, rock, timber cribbing, old wharves and even sunken wooden ships on this filled-in river strip. In addition, a McKiernan-Terry Single-Acting S-8 Hammer and the S-5 were used to drive approximately 1900 vertical steel piles. • This is more proof that dependable McKiernan-Terry equipment takes even the difficult jobs "in stride". Write for bulletin giving full details.

GRAB BUCKETS

COAL TOWERS

TRANSFER BRIDGES

HONING TO 42" I.D.

McKIERNAN TERRY

McKIERNAN-TERRY CORPORATION, MANUFACTURING ENGINEERS, 13 PARK ROW, NEW YORK 38, N. Y.
Plants: Harrison, N. J., and Dover, N. J.

MK 297

Do you require HIGH-CAPACITY at LOW HEAD?

Then specify a

MORRIS Straightflo PUMP

especially designed for flood-control drainage, and irrigation.

WHENEVER large volumes of water are needed, whenever pumps must work continuously over long, grueling periods, MORRIS large capacity, low-head pumps can be depended upon to give outstanding performance.

Built either horizontal or vertical, MORRIS STRAIGHTFLO (axial flow) or MORRIS MIXEDFLO can be driven by standard electric motors or Diesel engines. And each MORRIS pump is built to give the same dependable, economical service that is creating outstanding pumping records for irrigation systems, water companies, various government projects and large factories all over the country.

MORRIS MACHINE WORKS
BALDWINSVILLE, N. Y.
Sales Offices in Principal Cities

MORRIS Centrifugal Pumps

fluoride to a million parts water. Longview, Wash., also will add fluorides to its water supply. The city council recently authorized the water superintendent to take immediate steps to obtain necessary equipment and materials for the purpose. And in San Mateo County, Calif., the health director was given permission to approve applications from the county's eight water companies to add fluoride to the water.

It is announced that Mayor Thomas A. Burke of Cleveland, Ohio, has approved a plan to add fluorine to the city's drinking water at a cost of about $150,000 a year, with suburbs sharing the expense. The proposal must be approved by city council. Among Indiana cities planning to fluoridate their water supplies are Indianapolis, Evansville, Fort Wayne, East Chicago, Gary, Hammond, and Lafayette.

For better water—This spring Warren, Ohio, will award contract for its new domestic water supply from Mosquito Creek reservoir, instead of the Mahoning River. Havens and Emerson, Cleveland engineering firm, estimated the cost at $4,300,000 when the plans were presented early in 1950. The project entails a raw-water pumping station and force mains, water-treatment plant, high-service pumping station, twin feeder mains, each of 30 in. dia for the nearly five miles to the city, and more elevated storage.

Waterworks materials sought—Dallas, Tex., has decided to hire a man to push its fight for needed materials to finish by summer the new city water plant at Carrollton. Lack of materials, especially steel for the large water main and bronze valves, has been threatening to delay the plant. Mayor Wallace H. Savage and City Attorney Henry P. Kucera went to Washington to confer with the National Production Authority, which promised that on account of the city's critical need, it would ask suppliers to fill orders. And the Tennessee Iron and Coal Co. has agreed to deliver 1,030 tons of plate steel to the Gifford-Hill American Co. of Dallas, constructors.

Buffalo, N. Y., to survey municipal expenditures

The public works department of Buffalo, N. Y., will be the first division of the city government to be scrutinized in a newly authorized survey of municipal expenditures and governmental structure made necessary by the need for new revenue to pay salary increases.

This department, with its four divisions of engineering, water, streets

(*Continued on page 55*)

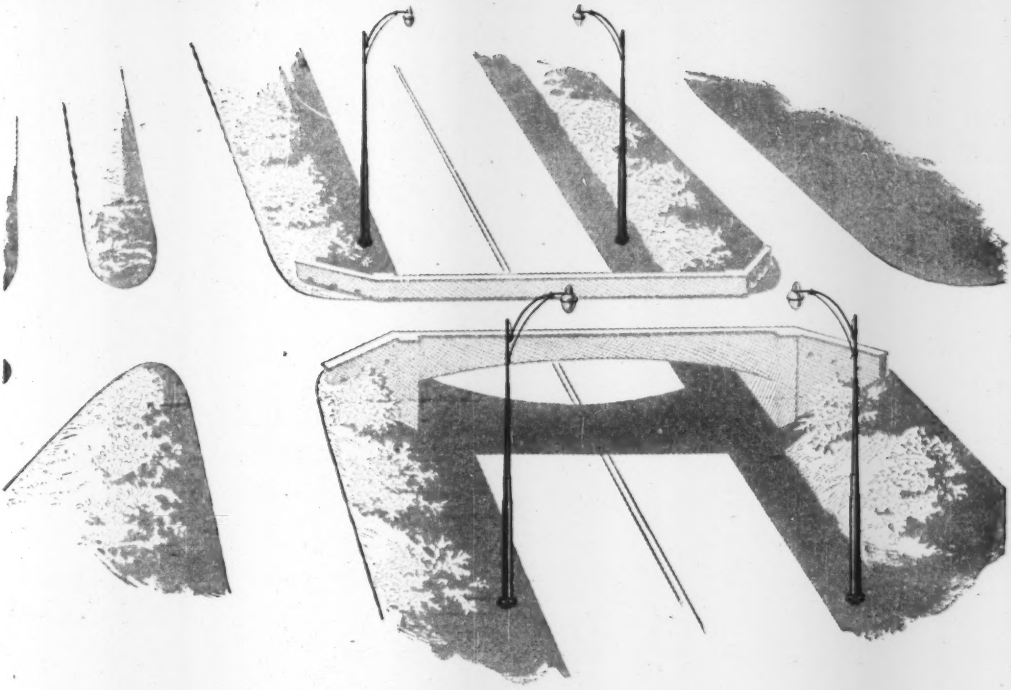

EXTERIOR DECORATORS:

dress up your streets with these slim steel poles

Any city perks up when unsightly poles are replaced with slim tubular steel standards.

Steel poles are smartly unobtrusive—in parks, on boulevards . . . on main streets, too. But just as important as good looks is the fact that steel poles, properly used, can save plenty of money.

National Tubular Steel Poles can be spaced at wide intervals – you don't have to use so many poles. Steel poles are easy to erect. Except for an occasional paint job, they require no maintenance.

Steel poles have very high strength, so they can take a lot of punishment. Their small diameter results in good traffic visibility and better all round safety.

National Seamless Tubular Steel Poles have absolute uniform wall strength *without* longitudinal welds. To produce them this way we actually pierce a solid billet of fine steel to form the basic shape. This forging operation, one of the most difficult in steel forming, gives you the famous "Walls Without Welds,"—the strongest, most durable steel standard you can buy.

Bulletin No. 14 describes these poles completely. For a copy write to National Tube Company, Frick Building, Pittsburgh 19, Pa.

NATIONAL TUBE COMPANY, PITTSBURGH, PA.

COLUMBIA STEEL COMPANY, SAN FRANCISCO, PACIFIC COAST DISTRIBUTORS · UNITED STATES STEEL EXPORT COMPANY, NEW YORK

NATIONAL *Tubular* STEEL POLES

UNITED STATES STEEL

Rough, Rugged, Heavy Duty Lubes for every equipment need!

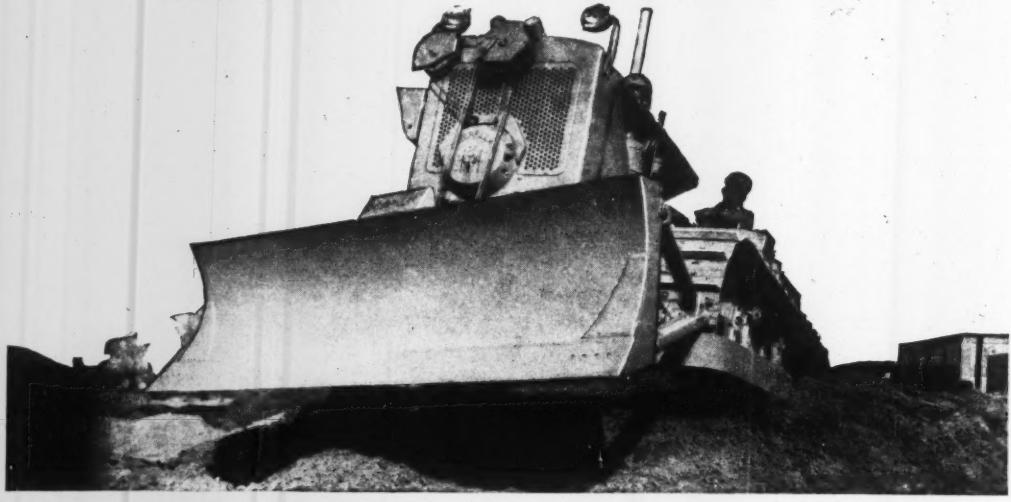

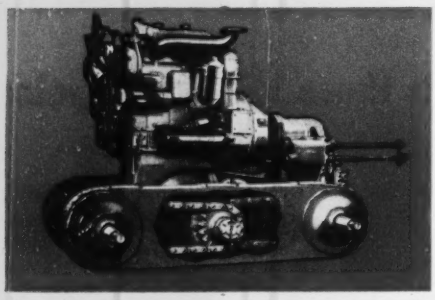

Look over this complete line of all-weather . . . all-purpose lubricants!

NAME ANY LUBRICATION PROBLEM you can think of! There's the right grade and type of Cities Service lubricant to do a real job for you. This performance-tested line of quality products will help speed your heavy duty operations, cut maintenance costs, prevent equipment breakdowns. Get in touch with the nearest Cities Service office to learn how these high grade lubricants can help you.

- **Trojan All-Weather . . . All-Purpose Greases**
- **Pacemaker Oils**
- **Trojan Gear Oils**
- **Heavy Duty Motor Oils**

FREE — A helpful new booklet — Earth Moving and Construction Machinery lubrication. Above cutaway view is typical of illustrations found in this new 50-page book dealing with proper lubrication in the construction industry. Write today for your copy.

CITIES SERVICE OIL COMPANY
Sixty Wall Tower, Room 1049
New York 5, N. Y.

Please send me without obligation your new booklet entitled "Earth Moving and Construction Machinery Lubrication."

Name _____

Company _____

Address _____

City _____ *State* _____

CITIES SERVICE

QUALITY PETROLEUM PRODUCTS

and buildings, has a current budget of more than $9,000,000 and employs 2,000.

The survey will be made by the George H. Elliott Co. of New York.

Latest parking developments

East St. Louis, Ill.—City council and the parking lot commission have approved construction of city's first off-street parking area. The 320-car lot will cost $250,000. City-owned and operated, it will be financed by revenue bonds, a method recently approved by the Illinois Supreme Court.—Location, Third Street, between Missouri Avenue and State Street.

Rushville, Ind.—This city of 6,500 population in southeastern Indiana has obtained a downtown parking lot for free parking and also has a new traffic set-up which includes new traffic signals, one-way traffic on narrow streets, and elimination or parking in two sections downtown. Practically all recommendations made by state engineers are being followed in the new set-up.

North Carolina—A bill has been introduced in the North Carolina Legislature which would authorize cities to set up off-street parking facilities, and to that end acquire, construct, improve, operate and maintain one or more parking projects. The bill would grant city officials the authority to purchase or condemn property "necessary or convenient." The authorities would be authorized to issue revenue bonds up to $3,000,000 for construction and operation of off-street parking facilities, including parking buildings.

Indianapolis, Ind.—Engineers have been studying possible sites for off-street parking facilities.

Coral Gables, Fla.—An ordinance is being considered which will require all future builders of residential property to provide off-street parking. Hotels and apartment houses would be required to provide one parking space for every three persons.

Tampa, Fla.—A 5-story concrete and steel parking garage to accommodate 600 cars at a time will be built on the corner of Tampa and Polk Sts. near the center of the downtown shopping district. Plans for the $750,000 cooperative enterprise were reported by Edwin K. Nelson, Jr., president of the Tampa Merchants Association. A new company has been chartered and already has applied to the National Production Authority for permission to begin construction.

SAVE
BY STANDARDIZING

...on CONTINENTAL
RED SEAL POWER

Experience of users all through the construction industry points to one big fact with dollars-and-cents meaning for YOU: the broader the operation, the more time and money you'll save by standardizing on Continental-powered equipment and machines. • • • • You'll simplify your service, for one thing, because so many Continental parts are interchangeable from model to model. And even more important in its long-range results, is the expert engineering of every Continental to its work. • • • • Whether it's driving a compressor, pump, mixer, winch, conveyor, earth-mover, trencher, or highway or industrial truck, each Continental Red Seal has been built for the use in which you find it. It will operate efficiently, dependably, with minimum time out—and by reason of this same matching, so will the machine. • • • • When buying specialized equipment, keep these facts in mind. Insure satisfaction by choosing a make with Red Seal built-for-the-job power.

GOOD EQUIPMENT IS BETTER WITH CONTINENTAL RED SEAL POWER

Continental Motors Corporation
MUSKEGON, MICHIGAN

Another of the many excellent plywood-formed architectural concrete structures along Los Angeles' famed "Miracle Mile" section of Wilshire Boulevard, the Carnation Company's new Western headquarters building is 10 stories tall. Adjacent to the larger building is a two story building which contains an employee cafeteria and sales and display rooms for the company's dairy products. Architects on the project are Stiles Clements Associated Architects and Engineers, Los Angeles. Job Contractors: William Simpson Construction Company, Los Angeles, California.

"Plywood Forms Permit Finish Surface To Be Cast With Structure"

Say Architects of New Carnation Company Western Headquarters

PLYFORM CONCRETE FORM panels were specified on the new Carnation Company Western headquarters building by Stiles Clements Associated Architects and Engineers for "smooth, fin-free concrete, ease of handling and overall job economy.

"Plywood offered the simplest and most direct medium for obtaining the smooth architectural concrete," explain the architects, "because plywood permitted an even-textured monolithic surface and the structure itself to be cast in one operation."

One more example of this fact: office building, factory, warehouse or bridge—architectural concrete or construction project—Douglas fir plywood creates smooth, fin-free concrete . . . affords economy through time and labor savings, simplified form construction and low cost per use.

Douglas Fir
Plywood

AMERICA'S

Contractors Report Time and Labor Savings With Plywood Form Panels

Construction view shows forms in place on smaller building as larger structure is painted. Smooth, plywood-formed walls required a minimum of finishing before being given two coats of oil paint. "Use of plywood forms provided many savings in application time and construction costs," report the contractors, William Simpson Construction Co. "On the job, plywood's performance was entirely satisfactory in every way. We have used the material for many years and, in our opinion, nothing else equals plywood for concrete form work."

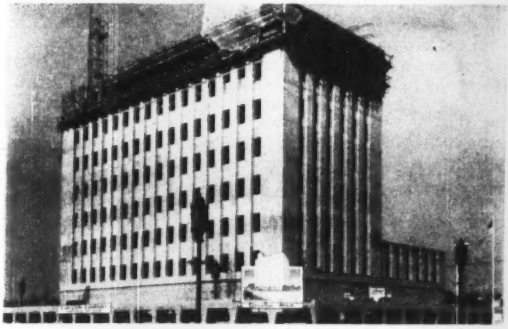

Forms were built by placing ⅝"-thick PlyForm panels across 2"x4" studding, backed by double 2"x4" wales. Forms were built-up in 16-foot long sections which were stripped and re-erected as pouring progressed. The plywood forms were re-used to job completion with an average of from 6 to 8 re-uses obtained from each of the panels.

Large, Light, Strong Real Wood Panels

For additional data on Douglas fir plywood for concrete form work, write (USA only): Douglas Fir Plywood Association, Tacoma 2, Washington. Of particular interest are two booklets: "Concrete Forms of Douglas Fir Plywood" and "Handling PlyForm".

BUSIEST BUILDING MATERIAL

For Smooth, Fin-Free Concrete Surfaces...

®PLYFORM

Concrete Form Panels

GENUINE DOUGLAS FIR PLYWOOD
PLYFORM
CONCRETE FORM PANEL
INTERIOR-TYPE GRADE B-B
D.F.P.A. INSPECTED

Smooth, fin-free surfaces . . . ease of handling . . . strength, rigidity, tightness . . . superior nail holding qualities . . . cost-cutting re-use factors —these are primary advantages of Plyform®. Highly moisture-resistant glues used in PlyForm panels permit multiple re-use (as many as 10 to 15 are not unusual). For the greatest possible panel re-use, however, specify Exterior-type EXT-DFPA® Concrete Form grade of Douglas fir plywood—bonded with completely waterproof phenolic resin adhesive. For special architectural concrete, requiring the finest possible finish, the architect or contractor may specify Exterior-type or Interior-type Douglas fir plywood in grades having "A" face veneer—or one of the new plastic-surfaced panels.



Yours for $1

New Keely PlyForm calculator gives construction data for plywood forms, based on hourly rate of pour. Complete with leaflet, "Design Assumptions for New Keely Calculator." Send coupon now!

DOUGLAS FIR PLYWOOD ASSOCIATION
TACOMA 2, WASHINGTON (Good in USA only)

Please send me ..... Keely Calculators. I enclose $1.00 each to cover costs.

Name.....

Address.....

City.....Zone....State.....

® PlyForm and EXT-DFPA are registered trademarks of the Douglas Fir Plywood Association

Imperial
TRACING CLOTH
THAT DEFIES TIME!

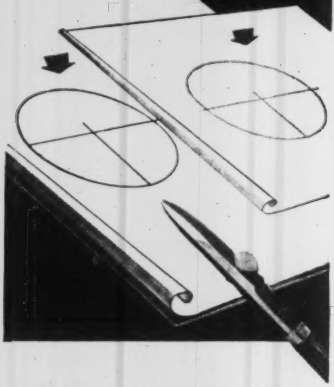

• The renown of Imperial as the finest in Tracing Cloth goes back well over half a century. Draftsmen all over the world prefer it for the uniformity of its high transparency and ink-taking surface and the superb quality of its cloth foundation.

Imperial takes erasures readily, without damage. It gives sharp contrasting prints of even the finest lines. Drawings made on Imperial over fifty years ago are still as good as ever, neither brittle nor opaque.

If you like a duller surface, for clear, hard pencil lines, try Imperial Pencil Tracing Cloth. It is good for ink as well.

Imperial
TRACING CLOTH
SOLD BY LEADING STATIONERY AND DRAWING MATERIAL DEALERS EVERYWHERE

FOREIGN

BRAZILIAN HOUSING—The building shown here under construction is one-half of a project for 600 apartments in the suburbs of Rio de Janeiro. They are the beginning of a development that will make 25,000 units available to the industrial workers of the city. Located near the suburban railway station of Lucas, they are being constructed by the Instituto de Aposentadoria e Pensoes dos Industriarios—the government-managed union of industrial workers in which membership is compulsory. Apartments have two sleeping-and-living rooms, kitchen, bath, service terrace. Monthly rental is about $11.

Rio lets contract for Santo Antonio removal

After nearly a year of legal and other delays, a $27,500,000 contract has been let for the removal of Morro Santo Antonio in Rio de Janeiro (ENR March 16, 1950, page 45). This project when completed will open up a large section of downtown Rio to new construction, and will add a considerable stretch to the foreshore of Guanabara Bay.

The hill occupies about 67 acres and is estimated to contain 6,500,000 cu yd—80 percent earth and 20 percent rock. This material dumped along the bay front will create a filled strip 550 ft wide on which a parkway will be built.

The fill job will include facing its full length with sheet piling to be protected with boulders. Channels for storm and sewage drains will be constructed to connect with existing lines. The work also includes the construction of retaining walls and abutments to protect the old Santo Antonio monastery, which will be the only feature of the old hill to remain.

The work has been awarded to a combination of Constructora Brasileira de Estrados S A and Estacas Franki, Ltda. The contract calls for completion in 730 working days.

Bureau of Reclamation helps India on Kosi Dam

A way of saving $10,000,000 in the cost of what will be the world's highest dam, the proposed 785-ft dam on the Kosi River in India, has been worked out by the U. S. Bureau of Reclamation at its Denver engineering center in tests for the Indian government.

It is explained by Acting Reclamation Commissioner Goodrich W. Lineweaver that although the original contract with the government of India was for a single load and stability analysis, two were made, because the engineers saw an opportunity for substantial economies in the designs so that India will save some 900,000 cu yd of concrete worth $10,000,000.

The reservoir impounded by the dam would irrigate 4,000,000 acres of land, an area larger than Connecticut and Rhode Island. Unique engineering problems at Kosi are the danger of earthquakes and the very unusual silt load of the river—397 ac ft per 100 sq mi of catchment.

Foreign briefs

French contracts in Latin America—Contracts obtained by French companies in Latin America recently include a $10,000,000 steel plant in Peru; a $25,000,000 contract to construct Colombia's first steel combine; a Brazilian oil refinery; and sugar refineries in Uruguay and in Sao Paulo, Brazil.

Swedish air raid shelters—Blasted into solid granite, eight bombproof air raid shelters are being built in Stockholm, Sweden. In peacetime they will be used as garages, schools, movie houses, restaurants, etc; in wartime they could give full protection against rockets, mine bombs, and, it is said, even atomic bombs.

Indian national laboratory—Building has started at Roorkie, India, on the Central Building Research Institute. The seventh in a chain of national

(*Continued on page 61*)

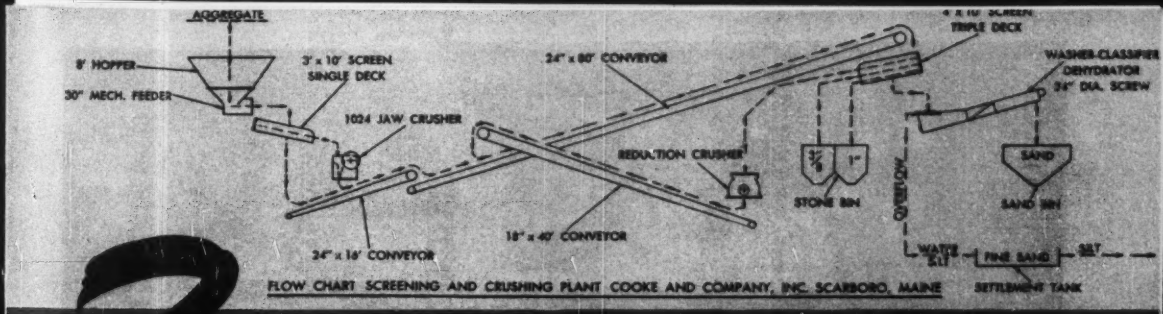

FLOW CHART SCREENING AND CRUSHING PLANT COOKE AND COMPANY, INC. SCARBORO, MAINE

3 Times the Production

at less than HALF the cost

Over-all view of plant from discharge end. Truck in foreground is receiving load of washed sand from sand bin.

Close-ups of primary crusher, screen and feeder.

At the left, three-deck screen over two-compartment stone bin. At the right, sand-classifier-washer-dehydrator over sand bin.

That's the experience of Cooke & Company with their new Austin-Western crushing and screening plant. Cooke & Company operate large gravel and sand pits in Scarboro, Maine; sell concrete mix, asphalt mix, washed gravel and washed sand. The separation of aggregate into stone of two sizes—"peastone" and "buckwheat"—and washed silt-free sand is the principal operation.

In the words of A. C. Stanley, president of the company—

"Compared with our previous operation, we save two trucks and four men — a total of $92.00 daily . . . are producing three times as much as before, at less than half the cost . . . quality of the gravel and sand produced has been very satisfactory . . . clean, carefully washed material is important when you want to obtain concrete that does not deteriorate."

Each Austin-Western plant is "tailor-made" for a particular production problem. Our engineering department will be glad to discuss yours.

AUSTIN-WESTERN COMPANY, AURORA, ILLINOIS, U. S. A.

Feeding and discharge ends of double-screw, 24" washer-classifier-dehydrator, which has a capacity of 120 tons per hour.

BUILDERS OF ROAD MACHINERY

Austin Western

SINCE 1859

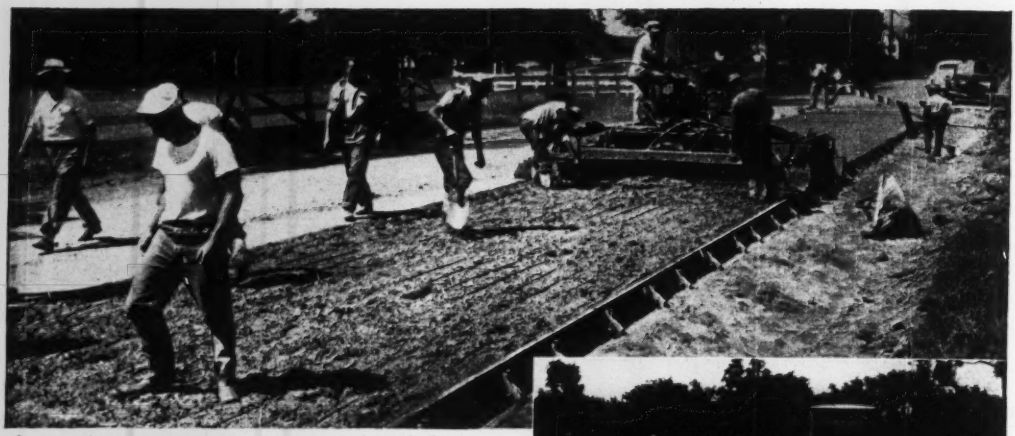

▲ Finished bridge approach takes shape as screed smooths the concrete over Bethlehem Bar Mats. Float finish already applied behind screed.

Road Improvement in Bucks County, Pa.

A recent road-improvement project authorized by the Pennsylvania Department of Highways involved the construction of a bridge, plus approaches, on Route 178, near Doylestown, Pa. These on-the-job photographs show various phases of construction of the approaches and the bridge itself. Contractor: J. D. Eckman, Atglen, Pa. Bridge reinforcing, bar mats and dowel units were furnished by Bethlehem.

BETHLEHEM STEEL COMPANY, BETHLEHEM, PA.

On the Pacific Coast Bethlehem products are sold by Bethlehem Pacific Coast Steel Corporation. *Export Distributor:* Bethlehem Steel Export Corporation

STEEL FOR HIGHWAYS

BETHLEHEM STEEL

Dowel Units • Reinforcing Bars • Bar Mats • Guard Rail Guard Rail Posts • Wire Rope and Strand • Pipe Hollow Drill Steel • Spikes • Bolts and Nuts Timber Bridge Hardware • Tie-Rods Sheet- and H-Piling • Fabricated Structural Steel

▲ Scraper moves into position for finished grading. At right background, paving proceeds at fast pace. Note finished lane, left of scraper.

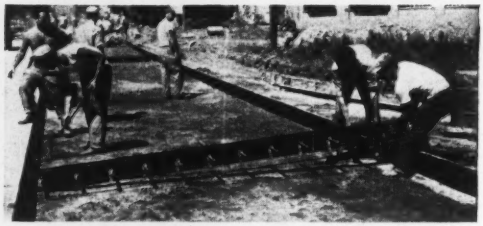

▲ Workers place Bethlehem Dowel Unit. The unit is designed to keep dowels accurately aligned in concrete, both horizontally and vertically.

▲ Placing Bethlehem Hinged Bar Mat over first course. The hinged portion of mat folds over double. Mat can be handled easily by two men.

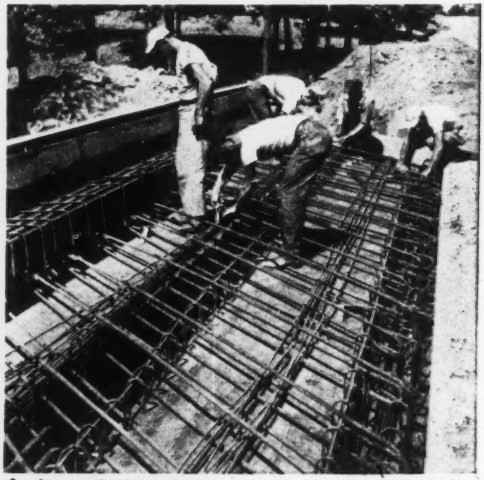

▲ Showing Bethlehem Reinforcing Bars being tied, prior to pouring concrete for bridge. Bars have high lugs to prevent slippage in concrete.

laboratories, it will conduct research on building materials, on engineering and structural aspects of buildings and foundations, on residential comfort, durability and speed of construction.

Rangoon General Hospital—U. S. economic and technical aid will be given to Burma to improve facilities of the Rangoon General Hospital. ECA also has plans to help the expansion of the University of Rangoon Medical College.

For projects in Israel—A Point 4 agreement has been made with Israel. That new country has suggested that American experts would be useful and welcome in connection with road construction, railways, irrigation, and public health services, and other parts of its social and economic program.

Koppers Co. contract—The Koppers Co., of Pittsburgh, has been awarded a contract to design and supervise construction and start operation of a battery of chemical coke ovens and a blast furnace for the Brazilian National Steel Co. (Volta Redonda). The blast furnace will have a 25-ft dia hearth, and will double the potential pig iron capacity of the Brazilian plant. Work will be done by the company's Freyn engineering department, Chicago.

Austrian hydro—The first international hydro electric project to receive aid under the Marshall Plan will be a new 96,000-kw plant to be built on the Inn River between Austria and Bavaria. The Economic Cooperation Administration will supply $540,000 for purchase of U. S.-built construction equipment, while $28,000,000 will be financed by Austrian-Bavarian Power Co.

(Continued on page 62)



COOPERATIVE BRICKWORKS—Australia's first cooperative brickworks began production recently at Enfield, a suburb of Sydney, New South Wales. The works are now producing enough bricks to build at least 300 houses a year. It is planned to establish a string of cooperative brickworks, lumber yards and factories to produce material for building houses for which there is a great demand in that country of the antipodes.

What's Your hauling problem?



Motor Graders!

To speed hauling of motor graders within 50 to 100-mile radius, La Crosse developed this 19-ton tandem axle trailer, with special ramp for loading grader steering wheels on trailer gooseneck. Trailer idea cuts grader travel time 50% . . . saves wear on graders.

Bulk Materials!

This special La Crosse-engineered "bin trailer" eliminated high labor cost for bagging and unbagging corn starch . . . cut delivery time 90% from processing mill to finishing plant 2 miles away. Tapered La Crosse bin is equipped with worm gear unloader at bottom.





Boats, etc.!

Featuring low height and special "hull-tailored" saddles, this custom-built La Crosse trailer cut the cost of hauling a 13-ton Chris Craft over 50% per trip. It also simplifies loading and unloading . . . insures a safer ride without damage to structure or finish of boat.

Capacities 8 to 67 tons—single, dual or tandem axle LC-14R

Check Today!

LA CROSSE TRAILER CORPORATION, La Crosse, Wis.

☐ Show me how La Crosse trailers can help reduce my cost of moving .....
(Equipment or Material)

Average load: .....tons; .....ft. long
.....ft. wide.....ft. high.

Name.....

Occupation or business.....

Address.....

City.....State.....

LaCROSSE

America's Favorite LOW BED TRAILER

PICK YOUR POWER with

The NEW Acker Teredo Drill...

No temperamental prima-donna is Acker's new, versatile Teredo Core Drill—*it performs efficiently with any power plant.*

And for dependable, low-cost, trouble free operation anywhere in the world—Acker design and construction can't be beat.

See for yourself—write for Bulletin 33 ENR.

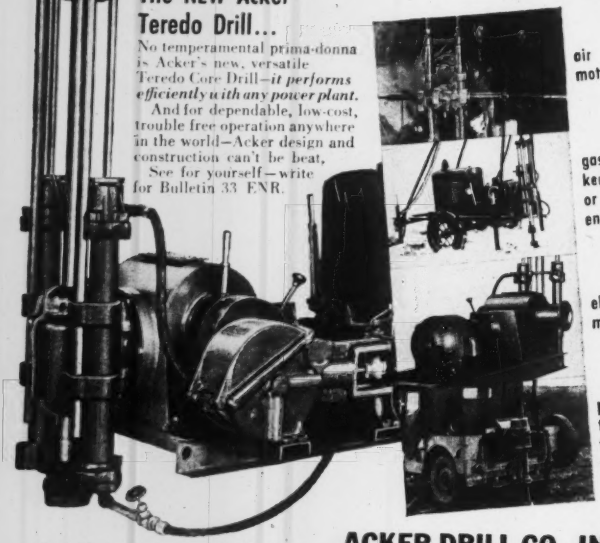

air motors

gasoline, kerosene or diesel engines

electric motor

power take-off from any vehicle

Over 30 years' experience in the design and development of Drilling Equipment.

ACKER DRILL CO., INC.
SCRANTON 3, PA.

TAC does what no other tool can do!

AT LAST! AN OPEN-END RATCHET WRENCH — the world's first true *universal* wrench. A patented design for connections on tubing, rods, piping, conduit, studs, etc. Sixty-four socket sizes from ⅜" to 4". Smallest effective ratcheting arc yet—5° to 7½°. TAC will also do every job any ordinary ratchet wrench will do: one TAC set replaces literally dozens of single-purpose hand tools.

makers of advanced tools for industry

TAC

TUBING APPLIANCE CO.
7112 South Victoria • 10321 Anza Ave. • Los Angeles, Calif.

Cable breaks on Rio's aerial tramway

Failure of the anchor section of the main cable has been blamed officially for the recent accident which left 21 passengers trapped in midair for seven hours on the famed Sugar Loaf Mountain aerial tramway over the harbor of Rio de Janeiro. A second safety cable bore the weight of the car plus the festooned main cable without mishap while an emergency car was constructed and let down to take off the passengers.

According to tests, the weight being carried by the broken cable section at the time of the accident was 10 percent less than its designed capacity. The cable, built in Germany, was almost two inches thick and composed of 444 steel strands, having a load capacity of about 192 tons.

The break came only about three feet above the turn-back point of the anchor section, known as the "rabicho" or pigtail. This section was about 30 ft. long from the turnaround to the splice with the main carrying cable. The main cable itself did not break.

Point 4 mission to Iran—Two Public Health Service officers, Dr. Emil E. Palmquist and Frederick F. Aldridge, Seattle, Wash., are leaving for Iran to join the Point Four mission which is conducting a rural development program there. Dr. Palmquist will serve as deputy technical assistance director of the Point Four program in Iran and director of its health activities. Mr. Aldridge will serve as chief sanitary engineer of the mission and advisor to Dr. Palmquist. They will organize and supervise the operation of local village demonstration teams for the training of Iranian personnel as public health officers and malaria control workers in an effort to improve living standards and assist in strengthening health services throughout the country.

Underground power station — The power station for the new Lavey hydro projects in Switzerland is located underground in a large chamber cut out of rock. This site was chosen not primarily for protection against air attack, as has been done in other stations in Europe recently, but because of poor soil conditions along the Rhone River at the site. The ground is largely alluvial and was found to be so lacking in bearing capacity as to require very expensive foundations. Their cost made the underground site more attractive, and of course the protection against bombing provided an added incentive.

You Choose More than a Truck when you Choose an FWD

YOU GET EQUIPMENT THAT CAN KEEP A SCHEDULE

"Rough going or soft bottom, FWD extra traction gets us where we want to go—and *safely*, whether the haul is over-the-highway or off-the-road—we'd rather drive an FWD."

YOU GET LOWER MAINTENANCE AND LONGER TRUCK LIFE

"FWDs proper distribution of load and power means less strain. Less strain means longer wear—fewer repairs. FWDs give us up to twice the life of ordinary trucks."

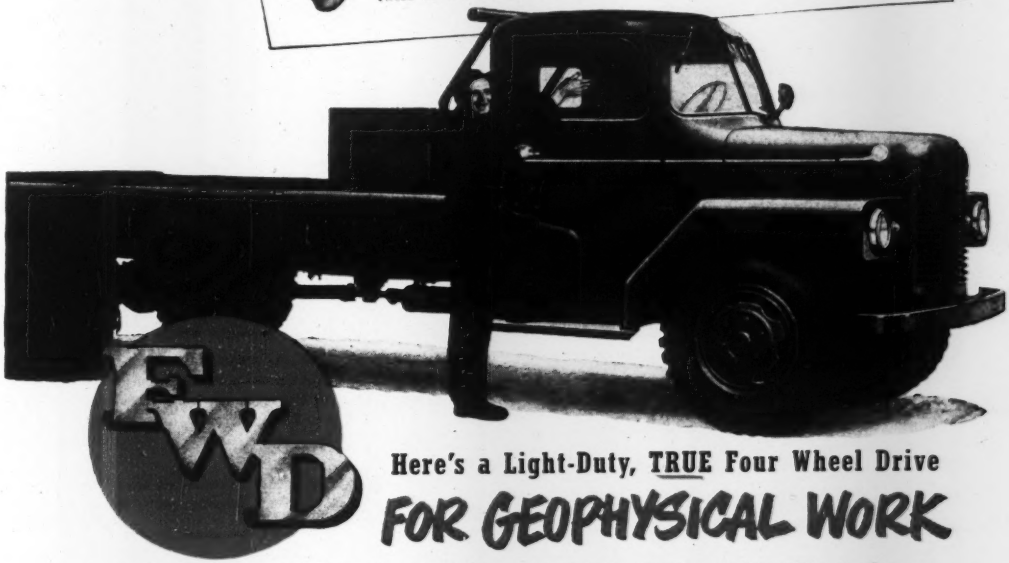

Here's a Light-Duty, TRUE Four Wheel Drive FOR GEOPHYSICAL WORK

You'll find that the new LD (light duty—14,500 lb. GVW) provides a firm safe mounting for drill rigs and geophysical instruments. It's a powerful, sure-to-get-there truck for hauling water or explosives, too. Ask for "The Story of the LD" plus facts on the complete FWD line. THE FOUR WHEEL DRIVE AUTO CO., Clintonville, Wis. Canadian factory — Kitchener, Ont. *World-wide Sales and Service.*

America's Foremost Heavy-Duty Truck

Tops in sales because they keep costs down!

Month after month, year after year, International Trucks cut hauling costs and give you better on-the-job performance.

Where's the proof? – in the carefully-kept cost records of heavy-duty haulers; the same men who have kept Internationals first in heavy-duty truck sales for 19 years. Their records are black-and-white proof that Internationals give you lower operating and maintenance costs even on the toughest jobs.

Where's the pay-off for you? – every new International Truck is *heavy-duty engineered* with extra stamina in every part to give you this same cost-cutting performance with longer truck life on *your* job.

You get the right truck for your job

When you buy a new International Truck you don't gamble with a "misfit" truck. You get the engine, the transmission, the axle, *everything* specialized to fit your particular job. You get a truck that's built to last and give you more efficient on-the-job performance. That's why over half the Internationals built in the last 45 years are still in operation.

You get a truck that drivers go for

The better a driver likes his truck, the better care he takes of it. That's why every new International is specialized from the driver's standpoint, too. An all-new steering system gives the driver more positive control from a more comfortable position. New Super-maneuverability lets him turn in the shortest *practical* circles – helps him in the tight spots.

The new Comfo-Vision Cab is the "roomiest cab on the road." It has mighty comfortable, fully-adjustable seats. And the driver enjoys full-front visibility through the one-piece Sweepsight windshield.

With 87 basic models, thousands of specialized variations, in the world's most complete line of trucks, you're sure of getting the right truck for your job. See the new International Trucks at your nearest International Truck Dealer or Branch *now*.

International Harvester Builds McCormick Farm Equipment and Farmall Tractors . . . Motor Trucks . . . Industrial Power . . . Refrigerators and Freezers

International Harvester Company • Chicago

See the new

INTERNATIONAL TRUCKS

Every model heavy-duty engineered for the long haul

MEN AND JOBS

NEW OFFICERS—of the Indiana County Highway Supervisors Association are, left to right: Ernest H. Coffin of Richmond, president; Will Slogle, Liberty, vice-president; Frank Shideler, Huntington, vice president; Leaton L. Day, Lebanon, secretary-treasurer, and Harold Mason, Danville, retiring president.

New Appointments

Highway departments

E. A. Davidson, testing engineer, Delaware highways.

F. C. Higley, acting div. engineer, Ohio highways, Delaware, Ohio.

David M. Nichols, member of Maryland Roads Commission.

Michigan highways, **H. H. Cooper,** Kalamazoo dist. engineer; **J. A. Becker,** acting engineer Cadillac dist.; **H. F. Rye,** asst. to deputy commissioner-chief engineer; **P. E. Plambech,** acting engineer of road design; and **Joseph Anton,** office of the chief engineer.

Sivert Thompson, state highway commisioner, North Dakota.

Earle L. Sheley, div. engineer Ohio highways at Delaware, Ohio.

Industrial and Commercial

R. A. Helmer, chief engineer, Standard Testing Laboratories, Oklahoma City, Okla.

Leonard Haeger, building materials expediter, National Association of Home Builders.

Wm. Lenco, bridge engineer, Canadian National Railways, Moncton, N. B.

Wm. D. Kinsell, manager, construction engineering dept. Pure Oil Co.

Recent appointments to the staffs of the engineering, operations and maintenance divisions of the Gaseous Diffusion Plant, operated by the Carbide and Carbon Chemicals Div., Union Carbide and Carbon Corp., Oak Ridge, Tenn., are: **D. M. Papke, E. L. Calvin, L. L. Parris, G. P. Gilliam, L. H. Beam, R. E. Harris, J. N. Evans, C. M. Erickson, W. F. Dority III, L. B. Curtis, J. L. Loper, Wm. Halchin, R. A. Yeakey, D. P. Ziemke, W. L. Wright, D. D. Norwood, A. J. Andrews, W. N. Johnson, L. R. Powers, Jr., D. E. Hatch, W. A. Nolan, H. A. Fisch, S. M. De Camp, Jr., L. F. Parsly, Jr., J. L. Gamble, C. E. Hall, A. F. Vincent, L. B. Jones, E. H. Bell, L. M. Gearhart, Abernathy Graham, E. A. Chambers, W. H. Campbell,** and **C. O. Langebrake.**

Recent engineering appointees to the staffs of the divisions of the Oak Ridge National Laboratory are: **D. M. Collier, K. M. West, T. M. Gayle, B. J. Massey, T. M. Kegley, Jr., D. R. Ward, J. D. Roarty.**

Fred Hamlin, formerly with the Bridge Dept., Calif., highways has started a portable bridge renting business at San Luis Obispo, Calif.

Edward A. Ravenscraft has been elected a vice-president of Abbott Laboratories, Chicago.

Carroll S. Anderson, field project mgr. for Du Pont Co.'s polyester fiber at Kingston, N. C.

C. M. MacWilliam, engineering studies, Connecticut Light & Power Co., Waterbury, Conn.

Don H. McCreery, staff of Holmes & Narver, Los Angeles engineers.

Wm. Denny, vice-pres. Marine and Heavy Construction div. Merritt-Chapman & Scott Corp.

Alfred M. Heaton, resident vice-pres. Merritt-Chapman and Scott Corp. in charge of New England operations.

Jas. W. Martin, exec. asst. to Port Director W. J. Heavey, Houston, Tex.

Charles L. Barber of Peterson, Hoffman & Barber, Toledo, Ohio,

(*Continued on page 68*)

For **STRENGTH** specify

TRI-LOK

RECTANGULAR

OPEN STEEL FLOORING

The locked-in strength of Tri-Lok enables it to stand up under heavy loads—even on long spans. Get maximum strength, air and light with minimum weight.

Tri-Lok is also available in Diagonal, or Super-Safety U-type Flooring, and in Stair Treads of all types. Write for Bulletin KK 1140.

The Tri-Lok Company is also equipped to furnish *riveted* and Tri-Forge *welded* open steel flooring. Tri-Lok can be furnished in a variety of metals, including aluminum alloy, stainless steel, etc.

DRAVO CORPORATION

National Distributor for the
Tri-Lok Company
Dravo Bldg., Pittsburgh 22, Pa.
Sales Representatives in
Principal Cities

DRAVO

Lick **THOSE MAN POWER SHORTAGES!**

...and drill holes in concrete faster and easier. TERMITES are the answer. They step-up manpower efficiency on all concrete drilling jobs. Enables you to drill more holes with fewer drills. Diameters up to 5". Fits standard electric drills. Get details today.

TERMITE ROTARY MASONRY DRILLS

TERMITE DRILLS, INC.
2081 Foothill Blvd. Pasadena 8, Calif.

On the Northern-
Sagtikos State Parkway,
Suffolk County, N. Y.

Again Heiliners

move more dirt faster..at less cost

Heiliners are built to help you meet schedules, save money!

200-HP Cummins Diesel — High top speed (25 m.p.h.), plenty of lugging power. Compression release for quick starts.

Easy-handling Hydro Steer — Makes steering effortless. You can turn the Heiliner with one hand in a 22-foot radius.

Adjustable Control Levers — Heiliner cable power-control unit has easy-to-reach controls. Levers adjustable to suit operator.

Good Visibility — No obstructions block operator's vision ahead or behind. He can always see how he's doing.

Comfortable Seat — Reduces operator fatigue, by absorbing the shocks in rough going.

4-wheel Brakes—Heavy-duty two-shoe air brakes. Auxiliary hand controls provided also.

Final Planetary Drive Reduction Gears — Can be serviced without removing wheel or disturbing brakes or hub bearings.

"They do the job quickly and without difficulty, regardless of the type of materials encountered."

— Writes Milton A. Hendrickson, Vice President Hendrickson Bros., Inc. Valley Stream, N. Y.

On the 1,000,000 cu. yd. Northern-Sagtikos State Parkway job in Suffolk County, N. Y., three Heiliners prove that they pay out in all kinds of ground and fill conditions. Soil is loam, clay, and sand. Hauls range from 1,200 to 5,500 feet.

It's the same story on jobs of all kinds across the country — no matter how tough the going, you can count on Heiliners for outstanding performance. Their extra traction, extra speed, and bonus loads make money for you every time.

Heiliners are available with either an 18-cu. yd. scraper or a 20-cu. yd. bottom-dump wagon — both interchangeable.

Take a good look at a Heiliner. Watch it operate. See for yourself how it moves lots of dirt in a hurry. Ask your Heil road-machinery distributor to arrange a demonstration.

FREE! **New Bulletin RM-50008 gives you facts it pays to know about a Heiliner. Send coupon for your copy.**

THE HEIL CO.

DEPT. 151, 3001 WEST MONTANA STREET • MILWAUKEE 1, WISCONSIN

Factories: Milwaukee — Hillside, N. J.

***District Offices:* Hillside, Washington, D. C., Atlanta, Milwaukee, Detroit, Chicago, Minneapolis, Kansas City, Dallas, Los Angeles, Seattle.**

TEAR OUT COUPON AND MAIL TODAY!

THE HEIL CO., Dept. 151
3001 W. Montana Street, Milwaukee 1, Wisconsin
Send me Heiliner Bulletin RM-50008.

Name.....

Title.....

Company.....

Company Address.....

City.....(.....) State.....

B-137

Compressed Air to handle most jobs For Less!

smith

MODEL 105-P

AIR COMPRESSOR



Model 105-P. Has self-starter, battery ignition, voltage regulator, large radiator capacity with thermostat for quick warmup.

The Smith 105-P delivers smooth power, gives long performance, and will handle most of your compressor work, for less! Powered with Chrysler Ind. 15 Industrial Engine with 377 cu. in. displacement. Delivers 105 cu. ft. per minute. Has sodium cooled valves and Stellite valve seats in engine. Stainless steel disc type valves and Manganese Bronze seats in compressor. Heavy duty with light weight (2100 lbs.). *Write for literature and prices.*

Also the SMITH 70-P AIR COMPRESSOR

GORDON SMITH & CO. 430 COLLEGE STREET BOWLING GREEN, KY.

... the new separable

FLEXCO HINGED BELT FASTENERS

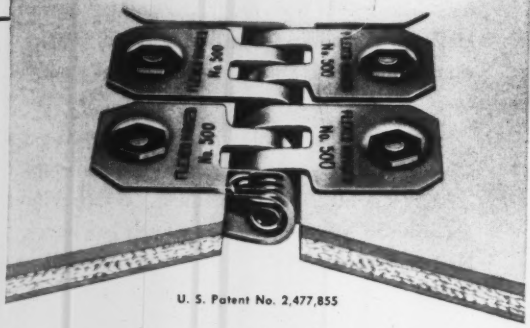

U. S. Patent No. 2,477,855

For joining grader, trencher, ditcher and other earth moving conveyor belts.
For belts 3/8" to 1/2" thick.
A FLEXCO fastener that is HINGED. Has removable hinge pin.
Troughs naturally, operates through take-up pulleys.
Strong, durable . . . pull or tension is distributed uniformly across joint.

Order From Your Supply House. Ask for Bulletin HF 500.

FLEXIBLE STEEL LACING CO. 4656 Lexington St., Chicago 44, Ill.

has formed Charles L. Barber, architects and engineers, at 1217 Madison Ave., Toledo.

Retirements

L. R. Higgins, acting dist. engineer, Bureau of Public Roads, Boise, Ida.
C. E. Russell, Moorcraft, Wyo., project engineer, Wyoming State Highway Dept. 28 years.
Brig. Gen. John F. Conklin, after 36 years in the Army Corps of Engineers.
W. I. Tomkins, designing engineer, Bureau of Bridges, Ohio highway, 50 years.

Resignations

Howard R. Graham, Madison County engineer, London, Ohio.
John I. Thompson, engineer and assistant administrator of the Agriculture Department's Production and Marketing Administration to join John I. Thompson & Co., consulting engineers.
Carl E. Alden, acting dir. of navigation U. S. Engineers, Ohio River Div.
Louis B. Bjastad, McLeod County, Minn., engineer to return to active duty with the U. S. Navy.
T. E. Riley, engineer, Henry County, Ia.
T. C. Banhagel, dist. engineer Michigan highways, Kalamazoo, to become supt. of road construction for Mid-American Engineering Corp.
Leonard Klarich, asst. professor of civil engineering, University of Colorado to enter private industry.
James F. Pou, mgr. building div., Carolinas Branch, A.G.C. to become asst. dir. of foundations, N. C. State College of Agriculture and Engineering.
Robert L. Moore, senior engineer, construction section, National Safety Council, Chicago to become engineering consultant, Lumbermen's Mutual Casualty Co. Chicago.
A. S. Noland, traffic engineer, Tennessee highways, Nashville.
W. J. Van Arnum, supt. of filtration, Mahoning Valley Sanitary dist., after 19 years.

Government agencies

Clifford R. Salmen, acting dist. engineers, Bureau of Public Roads, Boise, Ida.
Chas. B. Patterson, chief of technical services, div., Waterways Experiment Station, Vicksburg, Miss.
Herbert M. Leppich, project engineer for construction of a chemical processing plant at Idaho Falls, Ida., for the Atomic Energy Commission.

State, City and County

Prof. Harold Neilsen, University of Dayton, chief air pollution control engineer, Dayton, Ohio.

Thomas D. Hunt, traffic engineer, King County, Seattle, Wash.

A. W. Fabry, street superintendent, Canton, Ohio.

H. G. Ekadahl, Madison County engineer, London, Ohio.

John Taylor, chief engineer, New Castle County, Del.

R. S. Russell, planning director, Steubenville, Ohio.

Walter H. Tacke, expressway engineer, Milwaukee, Wis.

C. S. Boring, dir. housing commission, Dearborn, Mich.

L. A. Bergman, dir. public wks, Jamestown, N. Y.

Thomas Lamb, bridge engineer and J. A. Griffiths, drainage engineer, Winnipeg, Man.

Frank X. Burkhart, city school buildings engineer, Charleston, S. C.

M. L. Riehl, supt. of filtration, Mahoning Valley Sanitary district, near Youngstown, Ohio.

Ernest H. Paffrath, sewer commissioner of St. Louis, Mo., has celebrated his 42nd anniversary as a city employee.

Miss Barbara Terrett, housing and planning offices of the Washington, D. C. District Redevelopment Land Agency.

M. B. Larsen, engineer, Henry County, Iowa.

Walter Baseman, highway engineer, McLeod County, Minn.

L. J. Moore, engineer, McHenry County, N. D.

A. J. Bladholm, city engineer, Marshall, Minn.

L. P. Cabana, head, roads div. Public Works Dept., Montreal, Que.

Honors

Rudy A. Simonson, Bureau of Reclamation engineering aide at Elverta, Calif., Dept. of the Interior Gold Medal for distinguished service for heroism during a blizzard at Klamath Falls, Ore., in which he made heroic efforts to save A. G. Ribbech, chief, general engineering section, lost in the severe blizzard of last winter.

Wilbur S. Hanna, Billings, Mont., Dept. of Interior Gold Medal for distinguished service, after 44 years as engineer.

Henry Gerharz, retired engineer U. S. Indian Service, citation and bronze medal, Dept. of the Interior, in recognition of 22 years of government service.

(*Continued on page 70*)

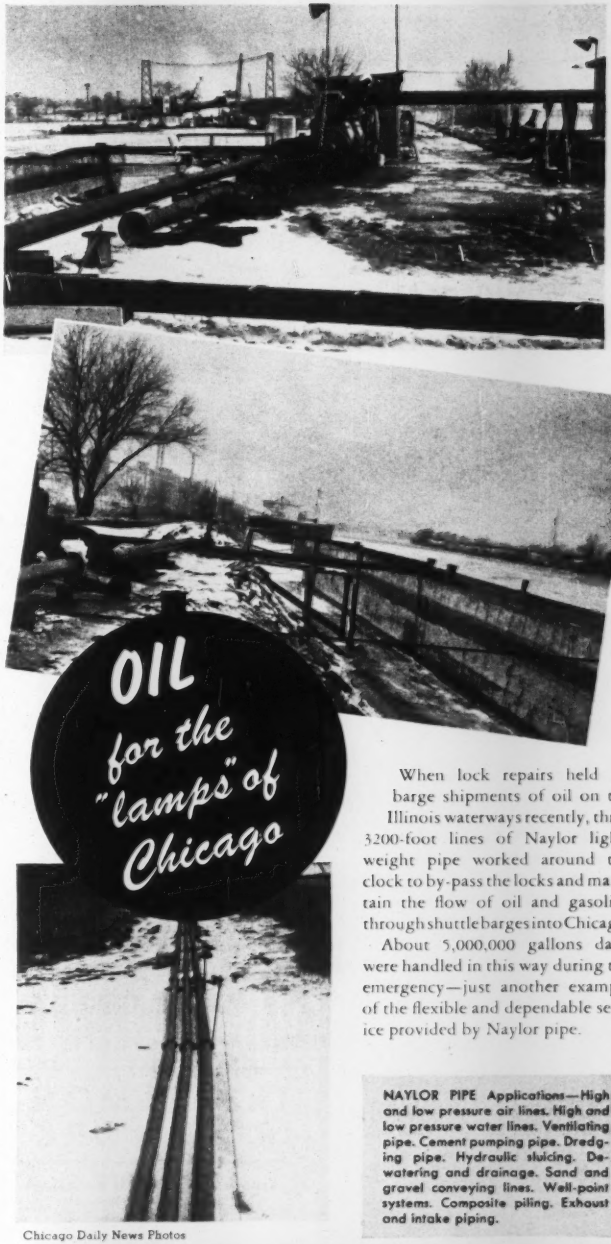

Chicago Daily News Photos

When lock repairs held up barge shipments of oil on the Illinois waterways recently, three 3200-foot lines of Naylor lightweight pipe worked around the clock to by-pass the locks and maintain the flow of oil and gasoline through shuttle barges into Chicago.

About 5,000,000 gallons daily were handled in this way during the emergency—just another example of the flexible and dependable service provided by Naylor pipe.

NAYLOR PIPE Applications—High and low pressure air lines. High and low pressure water lines. Ventilating pipe. Cement pumping pipe. Dredging pipe. Hydraulic sluicing. Dewatering and drainage. Sand and gravel conveying lines. Well-point systems. Composite piling. Exhaust and intake piping.

NAYLOR PIPE

Naylor Pipe Company, 1248 E. 92nd St., Chicago 19, Ill.
New York Office, 350 Madison Avenue, New York 17, N.Y.

MARION HOISTS DO IT EASIER!

. . . that's why they are more

- EFFICIENT
- DEPENDABLE
- ECONOMICAL

● By use of a curved track in the patented lifting arms, MARION gives you a hoist that operates at a uniform oil pressure throughout its dumping cycle.

Some conventional hoists require a peak oil pressure of 1100 lbs. per sq. in. to do the same job that a comparable MARION hoist, with patented lifting arms, does at only 615 lbs. per sq. in.

Consequently, MARION Hoists actually do their job easier—hydraulic systems last longer, are more efficient and dependable, and, in the long run, more economical to own and operate.

Ask us for the name of your nearest MARION Distributor—
let him give you the complete story.

MARION BODIES AND HOISTS

MARION METAL PRODUCTS COMPANY
MARION, OHIO, U.S.A.

STANDARD AND SPECIAL HOISTS AND DUMP BODIES FOR LIGHT, MEDIUM AND HEAVY DUTY SERVICE

"GUNITE" CONCRETE
(Since 1915)

FOR • STEEL PLATE LINING • STEEL ENCASEMENT • BUILDING NEW WALLS • LINING WATER RESERVOIRS, TUNNELS AND SEWERS • PLATE LINING OF STEEL STACKS, BUNKERS, DUCTS • REPAIR OF DISINTEGRATED CONCRETE AND MASONRY • CANAL, DITCH AND DRAIN LINING

GUNITE CONCRETE & CONST. CO.
1301 Woodswether Rd., Kansas City 6, Mo.

District Branch Offices

S. T. Burton Co., 228 N. LaSalle St., Chicago 1, Ill.
George R. Lewis Co., 2036 Queen Ave. S. Minneapolis 5, Minn.
E. H. Mueller Co., 6825 Delmar Blvd., St. Louis 5, Mo.
Otis K. Olson Co., 823 Perdido St., New Orleans, La.
Philip D. Barnard, 2038 Addison, Houston 5, Tex.
Western Steel Prod. Co., 1750 W. 13th Ave., Denver 4, Colo.

The BELMONT IRON WORKS

Engineers — Fabricators — Erectors
Contractors — Exporters
Cable address—Beliron

STRUCTURAL STEEL
BUILDINGS & BRIDGES
RIVETED — ARC WELDED
Shops — Eddystone

PHILADELPHIA
Main Office
Philadelphia 48, Pa.

ROYERSFORD
New York Office
44 Whitehall St.,
N. Y. 4, N. Y.



Rocky Mountain engineers in charge of construction on the Denver (Colo.) Valley Highway are, left to right, Dan W. Ormsby, urban engineer; F. K. Merton, construction engineer; and W. B. White, resident bridge engineer.



Safety pays, say these supervisors on construction of Harlan County Dam on the Republican River in southern Nebraska. They are, left to right: E. H. Swanson, concrete foreman, Harlan Construction Co.; B. V. Reany, project engineer, Corps of Engineers; and J. C. Moore, general superintendent for the contractors.

Leonard H. Meermans, civil engineer in the Pittsburgh District, Corps of Engineers, U. S. Army, is shown receiving a suggestion award from Col. Conrad P. Hardy, district engineer. H. E. Anderson, chairman of the local committee on suggestions, looks on. The suggestion covered an improved means of treating poison ivy, long a hindrance to Corps of Engineers' ground clearing work for construction purposes in the Pittsburgh area. Mr. Meermans received his Bachelor's Degree in civil engineering from the University of Pittsburgh in 1928.

Raymond conquers *chubascos*... in

THE WORLD'S MOST UNUSUAL SOIL BORING JOB

FOR VENEZUELAN OIL CONCESSIONS, LTD.

1. Construction of pipe frame float 30' high, 30' long on each side of the triangle.



2. Close view of the starting framework, showing 22" diameter steel pipe being used.



3. Completed framework, piped and watertight except for the corner verticals, which will accommodate anchor spouds.

The Problem: 250-foot Gow soil borings, accurately spotted five to ten miles offshore in the deep waters of Lake Maracaibo, Venezuela. The Project: pile foundations for future oil-well derricks. Special Hazard: 70-mile-an-hour "chubascos," violent squalls that would wreck temporary platforms.

The Solution: Raymond engineers designed a triangular *floating* platform of 22" steel pipe, welded and watertight. The three corner members were left open for 120-foot-long anchor spuds. Assembled on shore from steelwork fabricated in New York, the 60-ton float was skidded onto two barges and towed 32 miles to the first boring location where floating derricks launched it. Spuds and deck equipment were placed later, including winch-controlled anchors at each corner to help in spotting the float and holding it steady during boring operations.

The Moral: When the problem is tough, the answer must still be *right*. That's when it pays to have a resourceful, experienced organization on the job . . . like Raymond!



4. Floating pontoons supporting the 60-ton steel frame barges and towed it to the well-site.



5. Launching the 60-ton steel float. Note work platform erected 10 feet above framework.

6. Floating derrick being positioned over the 120-foot spuds, which will be driven to depth required.

140 CEDAR STREET • NEW YORK 6, N. Y.

THE SCOPE OF RAYMOND'S ACTIVITIES . . . includes every recognized type of foundation construction—concrete, composite, precast, steel, pipe and wood piles. Also caissons; underpinning; construction; bearing shore protection, shipbuilding facilities and harbor and river improvements; borings for soil investigations; and cement mortar lining of oil and water pipe lines 6" to 144" in diameter by the Centrifix Corporation, a Raymond subsidiary.

UNIVERSAL Spirolocs

HEAVY DUTY TIES

FASTEST — SAFEST — LOWEST COST

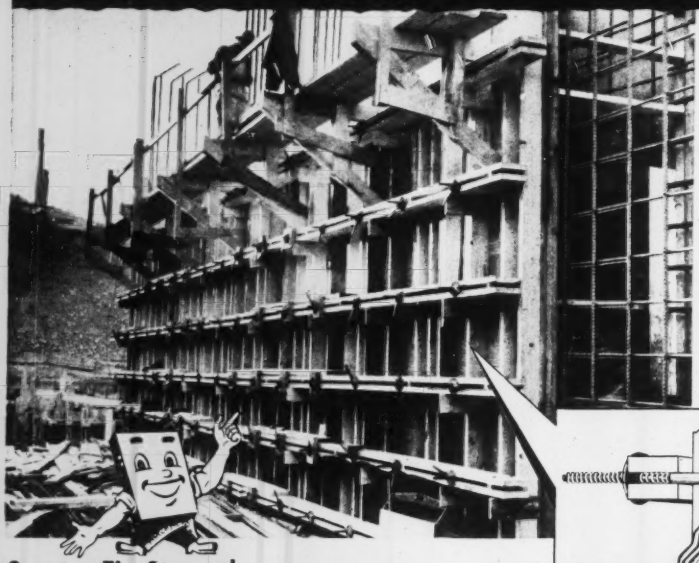

UNIVERSAL Spirolocs—heavy duty Form ties...*Permanent, reuseable equipment*... fast acting Acme threads...washers and stud rods last indefinitely, only *inexpensive* threaded tie rods expended.

Spirolocs provide fast erection...easy stripping... available in various time-saving combinations to fit the exact needs of your job.

RENTED...SOLD

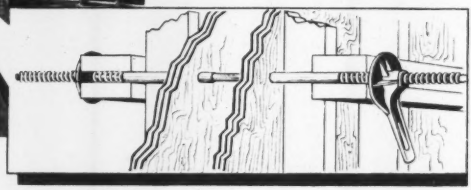

Greater Tie Strength
For less money with Spirolocs

5,000# Ties with ⅜-Tie Rods
9,000# Ties with ½-Tie Rods
14,000# Ties with ⅝-Tie Rods
20,000# Ties with ¾-Tie Rods

SPIROLOC CONE NUT ASSEMBLY

The only fast acting form Tie with an absolutely positive spreader...assures smooth surfaced, watertight walls.

Write for complete details on SPIROLOCS and ask for catalog describing Universal Form Tying Accessories.



Spirolocs are Furnished with either Handle or Nut Type Washers

THE HANDLE WASHER SLIP IT ON

SPIROLOCS IN ACTION

THE NUT WASHER SPIN IT ON

Universal FORM CLAMP CO.

Concrete Form Specialists Since 1912

General Offices and Factory • 1236-38 NORTH KOSTNER • CHICAGO 51, ILLINOIS • CAPITOL 7-1600

Branch Offices and Warehouses:

- SAN LEANDRO, CAL. 2051 9 Williams St.
- DALLAS, TEXAS 2175 W. Commerce St.
- HOUSTON, TEXAS 2314 Preston Ave.
- SPRINGFIELD, ILL. 2522 Poplar Ave.
- EUCLID, OHIO 24901 Lakeland Blvd.
- NEW YORK, N. Y. 51 E. 42nd St.
- BALTIMORE, MD. 661 S. Monroe St.
- SWAMPSCOTT, MASS. 51 Barnstable St.
- TAMPA, FLORIDA 4401 W. Cayuga
- HATO REY, PUERTO RICO Ave. Munoz Rivera 84—Stop 27½

Service Wherever You Build... Coast-to-Coast

EDUCATION, RESEARCH

Army improves sea-water distillation

Distillation equipment of the compression type has been chosen by the Engineer Research and Development Laboratories of Ft. Belvoir, Va., for concentrated studies in how to get drinking water from the sea.

Since 1941 a distillation test center has been set up on the seacoast at Fort Story, Va., and the latest model developed is now under test in Bermuda.

Chief problem in the distillation process has been scale forming on tubes of the evaporator—causing shutdowns for cleaning that cut efficiency by 50%. A way out of this difficulty was asked of the University of California. Researchers there found certain salts in a super-saturated condition would deposit on any available surface and concluded that by making surface areas available outside the evaporator, they could keep down the amount of scale forming inside.

In present tests, a control stabilizer is being used: it is a metal shell containing sand or limestone as a contact material through which brine from the evaporator is circulated upward. Most of the scale forms on the stabilizer material; only 5% as much of it forms in the evaporator as did previously, without control.

The improved unit should run six months without stoppage for scale removal; the old one, without scale prevention, needed to shut down after every 700 hours of operation.

Capacity of the distillation unit to put out 250 lb of distilled water per pound of fuel is not affected by the scale prevention process.

The thermo-compression distillation unit now under test is electrically powered and rated at 1,250 gal per hour. (Troops in bivouac need 5 gal per man per day; field hospitals need 150 gal per bed per day.) It weighs 40 tons, but knocks down to parts not exceeding 7½ tons for shipment.

Another "area" water supply problem being met by Fort Belvoir researchers is that of making water from snow in Arctic regions. A skid-mounted steam generator rated to produce 200 gal of water per hour is under development. Its potentialities for jetting in ice and frozen soil have been noted in tests made thus far.

Artificial quake tests made in Los Angeles

A full-scale building was subjected to artificial earthquake forces in Los Angeles recently. This is believed to be the first time for such a test.

The building became available for testing through a freeway right-of-way clearance program. Tests were conducted by the Earthquake Engineering

(Continued on page 74)

BITUMINOUS MATERIALS—Various problems in the use of bituminous materials in road building were considered at a recent institute at the University of Wisconsin. Watching Prof. Leonard F. Hills, associate professor of engineering in the Wisconsin Extension division and director of the institute, weigh a sample of bituminous concrete, are left to right, Harry K. Bumgarner, patrol superintendent of the Rock County highway department, Janesville, Wis.; Neal Bartholomew, city engineer of Eau Claire, Wis.; B. E. Fieve, city engineer of Stevens Point, Wis.; William Furniss, of the American Bitumuls of Maplewood, Mo.; Robert E. Fleischer, Sheboygan County highway commissioner, Sheboygen, Wis.; and Ray R. Swan, Dane County highway commissioner, Madison, Wis.

Wood Piles Above Water Table are Permanent

When Pressure-Creosoted and Correctly Used

Major building codes recognize pressure-creosoted piles, cut off above water table, as permanent. Such foundations are today demonstrating their efficiency by bearing the tremendous loads of towering multi-story buildings. Write for Booklet WO5-100 which tells the story of wood piles.

KOPPERS

KOPPERS COMPANY, INC.
Wood Preserving Division
PITTSBURGH 19, PA.

HERE'S HELP

for technical and business men

NEW 1951 Catalogue of McGRAW-HILL BOOKS

DESCRIBES OVER 2,000 BOOKS

Here is a guide to practical, expert information on many business and technical subjects. This catalogue contains clear, concise descriptions of more than 2,000 books written by leaders of business, industry and research. Get your copy now. In it you will find an up-to-date listing of books that give you the facts—experience—data—you need in solving your particular problems.

McGraw-Hill books bring you the experience of experts in your field

MAIL THIS COUPON FOR YOUR FREE COPY

Readers Service Department
McGraw-Hill Book Co., Inc.
330 W. 42nd St., N. Y.

Send me a free copy of the New 1951 Catalogue of McGraw-Hill Books. I want to know more about (Name subjects of most interest to you.)

.....

.....

Name .....

Address .....

City ..... State ..... FNR 5-10

write for your copy

of Hendrick Mitco Products Catalogue

Tells how Hendrick Mitco is made from steel bars, forced into integral panels under hundreds of tons of hydraulic pressure . . . shows their advantages for open steel flooring, and for stairways, ladders and fire escapes . . . explains their use, with fill of concrete, cement, asphalt or composition, as Armorgrids for floors, platforms, ramps and driveways that have to withstand heavy traffic.

SEE OUR CATALOG IN SWEET'S

HENDRICK

Manufacturing Company

Perforated Metals
Perforated Metal Screens
Wedge-Slot Screens
Architectural Grilles
Mitco Open Steel Flooring,
Shur-Site Treads, Armorgrids

45 DUNDAFF STREET, CARBONDALE, PENNA.

Sales Offices In Principal Cities

Output up . . . handling cost down!

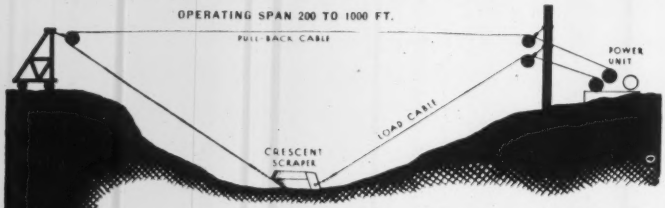

with a SAUERMAN SCRAPER

When a Sauerman scraper is making a deep excavation the operating speed can be increased by attaching the scraper to a trolley carrier riding on a slack cable as shown in the above picture.

Continuously, steadily, the powerful Sauerman Crescent scoop goes back and forth—making more hauls per day—delivering more yardage **and doing it for less cost.** It is at its best on difficult work, such as cutting down a hill, handling hard-packed or sticky material, stockpiling, digging ponds, etc.

Payroll savings too. Only one man is needed to control the entire operation of the machine and handle the small maintenance. Extreme simplicity of design and construction insure the long life and dependable service of this equipment. Fuel requirements; either Diesel, electric or gasoline, are very small on the basis of yardage handled.

Find Out More About This Remarkable Machine
Write Today for Large Illustrated Catalog

SAUERMAN BROS., INC.

532 S. Clinton St. Chicago 7, Illinois

Research Institute, a non-profit group formed by representatives of various engineering societies and universities on the West Coast.

Motion was induced by a shaking machine that produced a 6,000-lb horizontal force of sinusoidal variation. This unit was installed on the third floor of the 40x120-ft, four-story, reinforced concrete building. Resulting building motion was measured with vibration meters. The forces of the shaking machine were applied parallel to the 80-ft-long front and rear walls and these provided the only resistance to the horizontal forces.

When the shaking machine was operated in resonance with the first and second modes of vibration of the structure (i.e., at 2.6 and 5.1 cycles per second), strong accelerations were produced that exceeded 5% gravity at the roof. The observed damping in the structure was considered low—being less than 10% of critical damping.

Although the building was not originally designed to resist earthquakes, it showed no distress when subjected to the vibration. Existing shrinkage cracks at the corners of the windows were observed to have relative motion during the shaking. Analysis of the test data will, it is hoped, furnish useful information on the ability of such structures to resist earthquake and blast loading.

Structural steel scholarships offered

To encourage future engineers to enter the fabricated structural steel industry, the American Institute of Steel Construction will award 10 scholarships of $1,000 each in American colleges and technical schools during 1951.

Last year, in a national competition, 10 high school graduates received the first scholarships offered under the institute's new educational program.

The objective of the institute's scholarship plan, according to L. Abbett Post, executive vice-president, is to train engineers and administrators for the industry, although recipients of the scholarships are under no obligation to continue in the industry after graduation.

To be eligible for a scholarship a candidate must be proposed by the executive head of a member company of the Institute. A candidate need not be an employee, or the dependent of an employee, of the sponsoring company.

Scholarships are available only to students who pursue the full course in civil engineering offered at any one of 125 colleges located throughout the country.

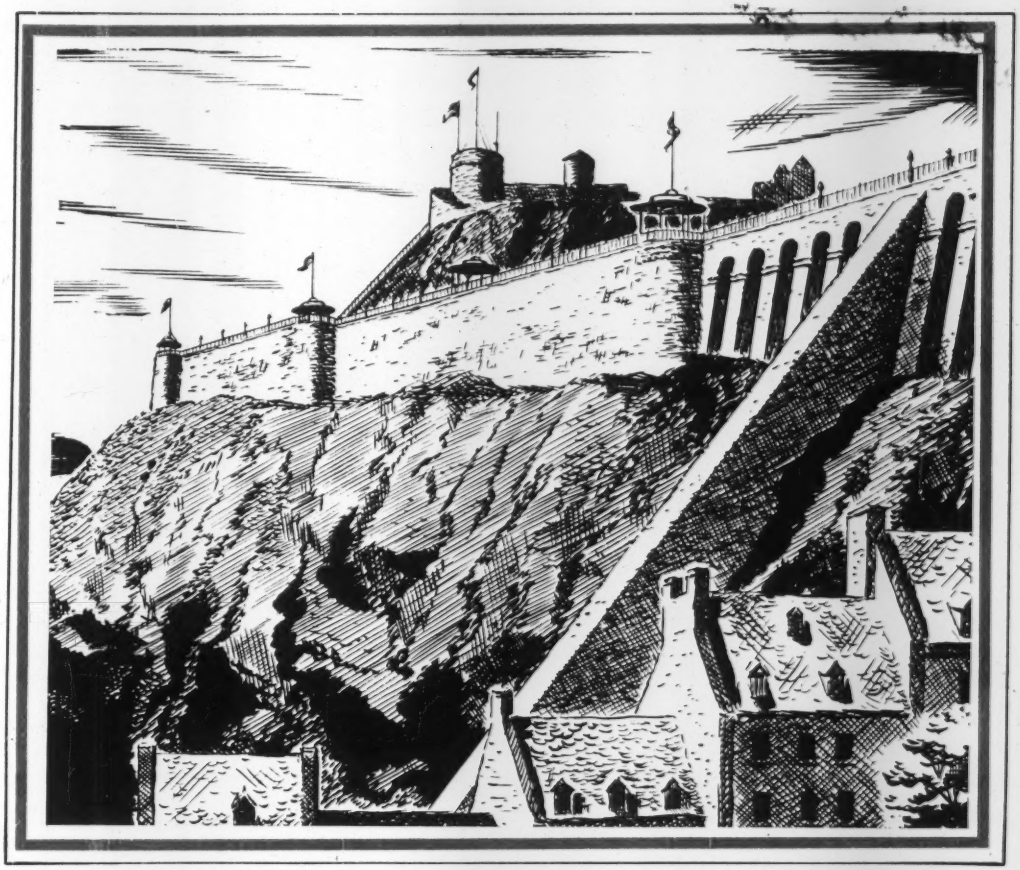

Quebec's famous Citadel, over 330 feet above the St. Lawrence, as it looked 100 years ago

Romantic Quebec has a cast iron gas main in service that was installed over a century ago. Reminiscent of those days are the horse-drawn vehicles for nostalgic tourists. Now, how could the gas engineers have foreseen the advent of trailer-trucks and giant buses, and the resultant traffic-shock? . . . That sewers and conduits for utility services would ultimately share the underground at risk of soil disturbances? Yet that gallant old cast iron main has had the necessary shock-strength and beam strength. Effective resistance to corrosion, as well as strength, are *must* factors of long life in pipe to be laid under city streets. This is shown by the fact that cast iron water and gas mains, laid over 100 years ago, are still serving in the streets of more than 30 cities in the United States and Canada.

United States Pipe and Foundry Co.,
General Offices, Burlington, N. J.
Plants and Sales Offices Throughout the U. S. A.

U.S.
cast iron
PIPE

NUMBER FIVE OF A SERIES

Let's Talk Over Sales-Service-Delivery Policies . . . *during the National Emergency*

Universal Sewer Pipe . . . United States Concrete Pipe are experiencing extraordinary demand for vitrified pipe and for concrete pipe. Our companies have expanded to keep pace with mounting demand. We have built still another factory to further increase production. Mechanization and experienced factory personnel team with our office and sales organizations to speed up our service.

Together, our companies pledge united effort to supply in both top-quality and large volume, the pipe that is required. With full size ranges, our lines compete always, competitively and fairly priced. Additional advantage cost-wise to you is in the strategic location of our eight plants.

PRODUCTS

Sewer Pipe (Vitrified)	Slipseal Sewer Joint	Flue Lining
Sewer Pipe (Concrete)	Segment Sewer Block	Stove Pipe
Vitrified Liner Plates	Meter Boxes	Chimney Tops
Tylox Flexible Rubber Coupled Vitrified Pipe	Ship Lap Wall Coping	Chimney Pots
Aerodrone Filter Block	Septic Tanks	Fire Brick
	Drain Tile	Fire Clay

SALES OFFICES:

NEW YORK—3917 LINCOLN BLDG.—60 East 42nd Street Tel. MU. 7-7395
BALTIMORE, MD.—HALETHORPE BRANCH—Box 7769. Tel. Elkridge 790
CINCINNATI, OHIO—P. O. NEWTOWN, OHIO—Box 215. Tel. Locust 7846

FACTORIES:

BALTIMORE, MD., CINCINNATI, OHIO, NEW PHILADELPHIA, OHIO, PALMYRA, OHIO (2), PHILADELPHIA, PA., UHRICHSVILLE, OHIO (2)

UNIVERSAL SEWER PIPE CORPORATION
UNITED STATES CONCRETE PIPE COMPANY
GENERAL OFFICES • 1500 Union Commerce Building • CLEVELAND 14, OHIO

MEETINGS

Charles Barnhart was elected president of the New Mexico Society for Professional Engineers. Other officers; Lawrence D. Wilson, first vice-president; A. S. Walters, second vice-president; Thomas Castonguay, re-elected secretary-treasurer. Daniel B. Jett, and E. R. Harrington, directors.

Charles A. Smith has been elected president of the General Contracting Employers' Association of Buffalo, N. Y., David Donald, vice-president. Executive committee, Herbert F. Darling, Joseph Davis, Carlton J. Lewis, Park L. Metzger, Daniel B. Neiderlander, and Avery J. Pratt.

Harry I. Kobayashi has been elected president of the General Contractors Association of Hawaii. Herbert G. Van Orden, first vice-president; Charles W. Hume, second vice-president, and Max W. Moody, treasurer. Directors, Fred J. Rudmann, Watson T. Yoshimoto, George E. Freitas, Richard R. Hadano, Edwin M. Kawaguchi, Archer T. Osler and Valentine B. Libbey. Gordon H. Scruton, executive secretary.

The American Water Works Association has granted to Ira P. Macnab, of Halifax, N. S. the George Fuller Warren memorial award for distinguished service in the water supply field. He is chief engineer and manager of the Public Service Commission of Halifax, operating the city's water and sewerage facilities. He is president-elect of the Engineering Institute of Canada, and of the dominion council of the Professional Engineers of Canada.

Samuel Busby is the new executive secretary of the Indiana Society of Professional Engineers. He was secretary of the Indiana Public Service Commission from 1944 to 1949. He also served during that same period as secretary of the Governor's Recodification Committee and the Indiana Reciprocity Committee.

Leslie E. Little, of Bucksport, was elected president of the Maine Association of Engineers to succeed Edwin T. McDowell. Other officers: Ford Harris of Lewiston, vice-president; director, Elwin Howard of Rumford; secretary-treasurer, Willis Pratt of Orono.

Lewis A. Parsons is the new president of the Engineers Club of San Francisco. He succeeds L. H. Anderson. Other officers: Secretary, Robert D. Dewell; treasurer, D. A. Stivers, Jr.; directors, Keith L. Davey, Harvey V. Eastling, and LeRoy F. Krusi.

Officers of the Western Concrete Pipe Association are H. W. Chutter, Fresno, president; Fred M. Linn, Modesto, Calif., vice-president; and William S. Rogers, Madera, Calif., secretary-treasurer.

W. B. Goodwyn of Montgomery, Ala. is president of the Alabama Road Builders' Association. Other officers, T. F. Holbart, Birmingham, vice-president; W. A. McWarters, Montgomery, secretary; W. R. J. Dunn, Birmingham treasurer.

The Southwest chapter of the Wisconsin Society of Professional Engineers elected Zenno Gorder, Monroe, president; Lynn Basby, Madison, vice-president; Willard Warzyn, Madison, secretary-treasurer; Directors elected are—Page Johnson and Ken Green, Madison and Joseph Lustig, Jonesville.

Toledo, Ohio, Building Congress has elected Fred Hausman president; Oran C. Mienka, first vice-president; Ray Gibboney, second vice-president; and Clarence F. Hammer was renamed secretary-treasurer.

CALENDAR

Building Officials Conference of America, King Edward Hotel, Toronto, Ont., May 14-17.

Society for Experimental Stress Analysis, spring meeting, National Bureau of Standards, Washington, D. C., May 16-18.

Pacific Northwest Sewage Works Assn., Hotel Vancouver, Vancouver, B. C., May 17-19.

Pacific Northwest Section, AWWA, Hotel Vancouver, Vancouver, B. C., May 17-19.

Pennsylvania Society of Professional Engineers, Americus Hotel, Allentown, Pa., May 18-19.

Canadian Section, AWWA, Royal Alexandria Hotel, Winnipeg, Man., May 21-23.

Conference on Industrial and Plant Protection, N. Y. University, Washington Square Center, N. Y. City, May 22-24.

New England and New York Sewage Works Associations, spring meeting, Hotel Kimball, Springfield, Mass., June 7-8.

President's Highway Safety Conference, Washington, D. C., week of June 10.

American Society of Civil Engineers, summer convention, Brown Hotel, Louisville, Ky., June 13-15.

National Society of Professional Engineers, annual meeting, Nicolet Hotel, Minneapolis, Minn., June 13-16.

American Congress on Surveying and Mapping, annual meeting Hotel Shoreham, Washington, D. C., June 18-20.

American Society for Testing Materials, Chalfonte-Haddon Hall, Atlantic City, N. J., June 18-22.



Free—

to ENGINEERS

FOR CIVILIAN AND DEFENSE CONSTRUCTION

"Typical Designs of Timber Structures" proved so helpful to architects and engineers during World War II that we have published a special printing as your guide in designing for present Civilian and Defense needs.

While the supply lasts, this 116-page book will be sent FREE to engineers who send us this ad clipped to their letterhead.

Timber fabricators in all sections of the country are ready to serve you—and there is plenty of lumber for all needs.

(ENR)

TIMBER ENGINEERING CO.
1319 - 18th ST., N.W., WASH. 6, D. C.

dewater the Complete way

Greater economy, greater speed of installation, greater flexibility in operation, greater success on all kinds of jobs in removing surrounding ground water —enabling you to handle the wettest work with greatest profit.

Write today for "Complete" catalog Dept. ER

COMPLETE MACHINERY & EQUIPMENT COMPANY, INC.
36-40 11th STREET
LONG ISLAND CITY, N. Y.

Branch Warehouse
3rd AVE. & ADAMS ST.
GARY, INDIANA

COMPLETE WELLPOINT SYSTEMS
FOR SALE OR RENT

The MAJORITY of Your
Heavy Hauling Jobs
can be handled
PROFITABLY with...
the POPULAR

ROGERS Type "T"

LARGE CAPACITY IN AN 8 FT. DECK WIDTH—LEGAL IN ALL STATES. 8 TIRES ON 2 ROCKING STUB AXLES WITH LEVEL OR DROP DECK IN 15, 20, 25, 30 and 35 TON CAPACITIES



A worms-eye view of the sturdy rear end and frame construction of the famous "T"

By reason of its versatile adaptability to all kinds of heavy hauling jobs, the Rogers Type "T" has steadily increased in popularity.

It's a "natural" for small and large contractors and haulers. If you are considering the purchase of one or more trailers, by all means investigate the Type "T".

It packs powerful advantages in a multi-purpose single unit. Write for full details and catalog.

EXPERIENCE builds 'em — PERFORMANCE sells 'em

ROGERS BROS. CORP.

ALBION, PENNA.

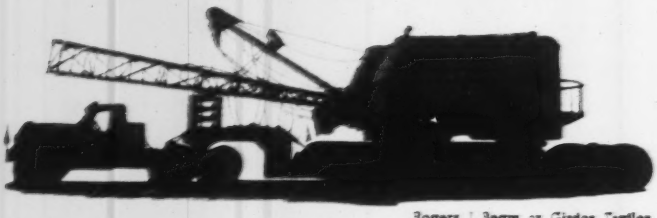

Rogers I Beam or Girder Trailer

OBITUARY

Lawrence A. Cline, 50, vice-president of United Concrete Pipe Corp., Baldwin Park, Calif., died recently in Los Angeles. During World War II he was officer in charge of a naval construction battalion in the Aleutian Islands and later of a naval construction regiment in the Okinawa campaign. He was a graduate of the University of Illinois.

Milton W. Morris, 46, executive vice-president of Associated Home Builders of San Francisco, died recently. He had been with the association since 1937.

Wesley P. Cottingham, 79, a civil engineer graduate of Texas A. & M. College, died in Houston, Tex., April 14. His early work was with the Southern Pacific Railroad and in 1905 he established the Texas Blue Print Supply Company.

Fred A. Luber, 58, chief of the architectural engineering department of the Wisconsin Electric Power Co. of Milwaukee, died April 18. He started with the firm in 1910 as a draftsman. He was in charge of the design and construction of company buildings, including the recently completed Port Washington power plant. Mr. Luber was president of the Milwaukee Harbors and Rivers Association, chairman of the Milwaukee Building Code committee, and chairman of the Wisconsin State Building Code committee.

A. L. Meger, for ten years highway engineer of Pipestone County, Minn., died March 26.

Henry C. Morehouse, 85, former city engineer of Denver, Colo., died at Santa Monica, Calif., April 12. He had retired 20 years ago.

James C. Kennedy, 57, retired civil engineer, died in New York City April 24. He was a Princeton graduate and formerly was a consulting engineer with Coverdale & Colpitts.

Hiram N. Crichton, 62, a civilian engineer in the U. S. Engineers Corps, and superintendent of the Cape Cod Canal, died at Buzzards Bay, Mass., April 21. He was graduated from the Massachusetts Institute of Technology in 1910 and had been stationed at Buzzards Bay for the last three years, following wartime duty in the Caribbean area. Mr. Crichton had many years' service in canal, bridge, river, and harbor construction.

WHEREVER TRACKS AND TIRES...

GRIP THE GOOD EARTH!

There you'll find Lamson & Sessions' line of high-quality, heavy-duty fasteners servicing all types of mechanized equipment.

Manufacturers, jobbers and repair shops alike simplify ordering and stocking—and are assured of the finest in fasteners—by standardizing on the complete Lamson line.

Why don't you?

Send for this Handy Reference Brochure on Heavy Machinery Fasteners Today!

The LAMSON & SESSIONS Co.

General Offices: 1971 West 85th Street, Cleveland 2, Ohio

Plants at Cleveland and Kent, Ohio • Birmingham • Chicago

MAKERS OF FINE FASTENERS SINCE 1866

BOLTS • NUTS • SCREWS • COTTERS • STUDS • RIVETS • SPECIALS • SCREW MACHINE PRODUCTS

—CUT ALONG THIS LINE—

Pay Dividends

LAMSON LOCK NUTS: Economical, vibration-proof. Can be re-used repeatedly.

"1035" SET SCREWS: Cup point type, hardened, heat-treated.

COTTER PINS: Steel, Brass, Aluminum and Stainless Steel.

"1035" CAP SCREWS: Hi-Tensile heat-treated steel.

TRACTOR BOLTS: Made to manufacturers' standards.

MILLED STUDS: Concentric, accurate, in a full range of sizes.



"BENT" BOLTS: Including U Bolts, Eye Bolts, Hook Bolts, etc.

Wire Rope Clips: Hi-Center saddles, extra-strength U Bolts.

PIPE PLUGS: Forged Steel, heat-treated.

FOR MORE INFORMATION ON LAMSON *Money-Saver* FASTENERS . . . . . CHECK COUPON and CLIP THIS STRIP

The Lamson & Sessions Company
1971 W. 85th St., Cleveland 2, Ohio

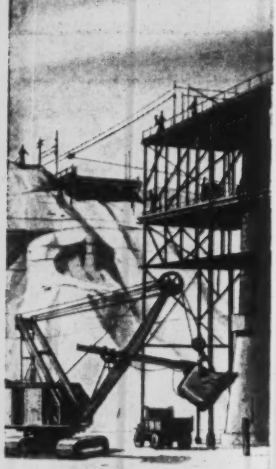

The first real pipe that is plastic

ONLY CARLON combines the inherent advantages of plastic with the desirable characteristics of metallic pipe. This new pipe is guaranteed against rot, rust, and electrolytic corrosion and is impervious to sulphurous waters, alkalies, metallic salts, and corrosive wastes. As a result, CARLON has a projected trouble-free service life many times longer than ordinary pipe. Because of its light weight (1/9th that of steel), CARLON can be installed rapidly without special tools or heavy materials handling equipment.

CARLON PIPE can be used for drinking water, sludge, drainage and irrigation systems, ventilating and cooling lines, hydraulic sluicing, and intake and exhaust piping. It is recommended also for low pressure air lines and exposed or concrete-incased electrical conduit.

FLEXIBLE and RIGID types of CARLON are available in all standard pipe sizes. Flexible CARLON plastic pipe is furnished in long lengths (requiring fewer fittings) and will conform to irregular surface contour, ditch line, or structural plan. Rigid CARLON is supplied in 21-foot coupled sections which can be joined rapidly by means of molded threaded fittings. In addition, this pipe can be threaded with conventional pipe dies. Complete line of fittings incorporating standard I.P.T., is available for plastic-to-plastic as well as plastic-to-metal connections. When you pipe for the future, specify ONLY CARLON plastic pipe!

CARLON PRODUCTS CORPORATION

IN CANADA: MICRO PLASTICS, LTD., ACTON, ONTARIO

10152 MEECH AVENUE • CLEVELAND 5, OHIO

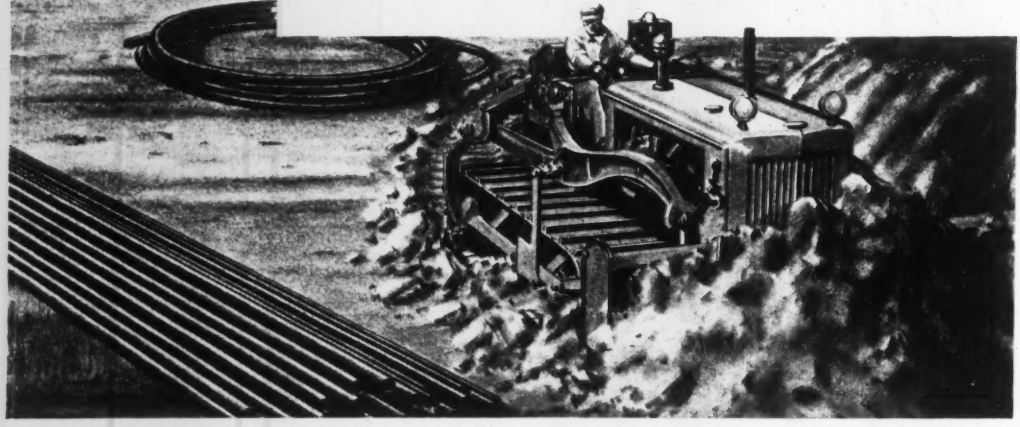

CONSTRUCTION BUSINESS

Construction awards drop for April

Engineering construction awards for the month of April fell behind the previous month, but continued to show substantial increases over the comparable period of 1950.

Total of public and private awards for the four-week month was $1,053,434,000, compared to $1,406,456,000 for March (ENR April 5, p. 27). However, compared to the same month a year ago, the 1951 figures showed these increases: Public construction, $494.9 million, up 32% over 1950; private construction, $558 million, up 52% above 1950.

With the April, 1951, figures added, it is to be noted that the cumulative total for the first four months of this year is now $4,997,847,000, as compared to the cumulative total of $3,480,193,000 for the same period of 1950.

Following the war-nurtured trend, biggest contributor to the April total was private industrial construction, which racked up a total of $309.7 million in contracts let. Next heaviest classification was public buildings, residential and other, with a four-week total of $162.8 million. Private residential construction weighed in for the month with $133.3 million, compared to $323.5 million a year ago.

Regionally, the area west of the Mississippi led for the month, with $283.3 million contracts let. The Far West came second, with $223.3 million contracts, and New England trailed for behind with $47 million.

Building materials drop, Commerce department says

Production of building materials—which has been decreasing steadily since the August, 1950, high of 192.2, dropped again from January to February, as measured by the U. S. Department of Commerce Index of Production (1939=100).

The index for February stood at 140.9. In January it had been 155.1.

Adjusted for seasonal trends, however, the February production was at 170.8, compared to a similar adjustment that brings January up to 181.6.

The individual components of the index showed decreases all along the line. Lumber production, at 115.3, was 10.1 below January; hardwood flooring was 165.1, compared to 186.8 for January. Brick was listed at 107.1, a drop of 14.9. Cement production fell from 171.1 in January to 149.2 for February.

Production of wire nails was down 20.2, to 118.6 for February; fabricated structural steel was at 129, from January's 147.4; reinforcing bars dropped 13.3 to hit 133.8. Softwood plywood dropped too, from the revised 254.5 for January to 233.2 for February.

Gypsum board production fell 14.6 to 759.1; gypsum lath was 258.6 compared to 263.9 for January; asphalt prepared roofing production was 153 for February, down from January's 184.9, and asphalt siding output was 187.9, compared to 220.4.

Structural clay tile and clay sewer pipe also showed drops.

Labor rejoins board for wage settlements

Exactly two months after they walked out, the major labor organizations walked back into the defense agencies this week. Their return had been a foregone conclusion after President Truman and administration leaders accepted a "compromise" plan outlined by labor men themselves (ENR April 26, p. 24).

In brief, the newly-constituted 18-man board (the previous one had nine members) will have an impartial chairman, and 17 members representing the public, labor, industry; with its powers enlarged to include settlement of labor disputes certified to it by the President.

Labor's representation on the new board will be: Harry Bates, of AFL bricklayers; E. E. Walker, AFL machinists; Emil Rieve, CIO textile workers; J. W. Livingston, CIO auto workers; Joseph C. Bierne, CIO communications workers; W. C. Birthright, AFL barbers. Bates, Walker and Rieve were the men who walked out of the old board.

Administration leaders at midweek, however, were having difficulty finding topflight labor relations experts from industry and the public to serve with

ENGINEERING CONSTRUCTION CONTRACTS REPORTED TO ENGINEERING NEWS-RECORD — APRIL, 1951

Engineering News-Record *reports continental U. S. Construction projects of the following minimum costs — Waterworks, excavation, drainage and irrigation,* $34,000; *other public works,* $60,000; *industrial buildings,* $82,000; *other buildings,* $300,000
Four Weeks — Thousands of Dollars (000 Omitted)

	April, 1951						U. S. Cumulative Four Months		% Change	Canada
	New England	Middle Atlantic	South	Mid-West	West of Mississippi	Far West	Total U. S.	1951	1950	'50 to '51	April, 1951
Public Works											
Waterworks	111	2,611	2,430	6,284	4,872	1,082	**17,390**	**79,610**	83,615	− 5	7,316
Sewerage	502	3,038	8,453	1,561	6,217	3,893	**23,664**	**105,267**	74,519	+41	2,183
Bridges	314	1,072	4,709	1,805	11,496	1,392	**20,788**	**86,948**	103,345	−16	6,317
Earthwork and waterways	....	3,691	7,695	462	27,694	82,920	**122,392**	**205,663**	128,700	+60	398
Streets and roads	522	3,932	15,367	19,806	31,667	9,924	**81,218**	**314,006**	337,373	− 7	1,912
Public buildings, residential	2,967	1,850	9,767	.....	2,589	3,286	**20,459**	**183,571**	67,788	+171	.....
Other public buildings	9,221	11,869	21,606	74,645	22,952	22,573	**162,866**	**800,955**	552,904	+45	12,868
Unclassified	414	5,237	11,855	1,443	13,174	14,036	**46,159**	**163,746**	118,588	+38	5,002
Total public	**14,051**	**33,300**	**81,812**	**106,006**	**120,661**	**139,106**	**494,936**	**1,939,766**	**1,466,832**	**+32**	**35,996**
Federal government (included in above classifications)	2,862	6,703	24,627	58,646	51,304	85,934	**230,076**	**763,263**	470,908	+62	14,303
Private											
Bridges	.....	.....	.....	500	500	.....	**1,000**	**3,438**	2,483	+38	.....
Industrial buildings	29,032	31,436	45,827	47,646	125,738	37,025	**309,704**	**1,819,194**	354,589	+413	16,831
Com'l. buildings, residential	2,325	75,631	17,269	16,050	11,105	10,896	**133,276**	**648,180**	1,169,706	− 45	6,995
Other commercial buildings	2,615	4,889	5,005	9,912	7,288	6,433	**36,142**	**218,883**	323,547	−32	4,301
Unclassified	6,060	.....	19,126	250	23,038	29,902	**78,376**	**368,386**	163,036	+126	375
Total private	**33,032**	**111,956**	**87,227**	**74,358**	**167,669**	**84,256**	**558,498**	**3,058,081**	**2,013,361**	**+52**	**28,202**
Total Engineering Construction:											
Apr., 1951 — 4 weeks	**47,083**	**145,256**	**169,039**	**180,364**	**288,330**	**223,362**	**1,053,434**	.....	.....	.....	**64,198**
Mar., 1951 — 5 weeks	30,456	171,871	312,749	261,266	476,449	153,665	1,406,456	.....	.....	.....	49,725
Apr., 1950 — 4 weeks	47,851	232,436	138,790	98,241	209,521	158,205	885,044	.....	.....	.....	54,203
Four Months — 1951	**140,604**	**906,699**	**1,071,041**	**891,609**	**1,337,110**	**650,784**	.....	**4,997,847**	.....	**+44**	**309,037**
Four Months — 1950	176,009	848,598	505,455	451,251	806,197	692,683	.....	.....	3,480,193	.....	184,974
% Change '50 to '51	−20	+7	+112	+98	+66	−6	.....	.....	.....	.....	+67

NO TIME LOST!
LOADING OR LAYING ITS LOAD

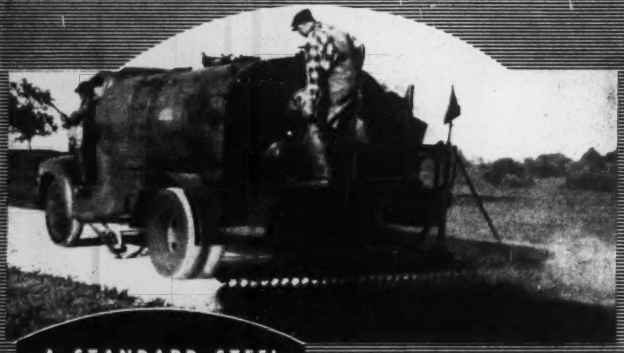

A STANDARD STEEL PRESSURE DISTRIBUTOR GIVES EQUAL CIRCULATION THROUGHOUT THE SPRAY BAR FOR A UNIFORM SURFACE FROM CURB TO CURB FOR LONGER WEAR

STANDARD STEEL
PRESSURE DISTRIBUTOR

The Model 424 can be loaded in quick time for a "fast getaway". A two-way cleaning system guarantees a clean spray bar at the end of the day. First, the material is sucked out of the bar and back into the tank. Then by turning one small valve, cleaning solvent is released into pump and spray bar (without contaminating the asphalt in the tank). No time lost in tinkering — no time lost in loading — Standard Steel 424 keeps going all day long far ahead of the "gravel gang"

WRITE FOR CATALOG 424

OTHER PRODUCTS OF STANDARD STEEL

Maintenance Distributors, Tar Kettles, Patch Rollers, Supply Tanks, Tool Heaters, Asphalt Tools, Street Flushers, Construction Brooms.

Built to the Highest Standard

PD-1

Standard Steel Works NORTH KANSAS CITY, MO.

DRILLING CONTRACTORS

DIAMOND AND SHOT CORE BORINGS—DRY SAMPLE BORINGS

Foundation Testing for Bridges, Dams and All Heavy Structures

Also

Manufacturers of Diamond and Shot Core Drills, Accessories and Equipment

SPRAGUE & HENWOOD, Inc.
Scranton, Pa. Dept. E, U. S. A.

GUNITE
PNEUMATICALLY PLACED CONCRETE
DENSE · DURABLE · HIGH STRENGTH

for

Restoring Disintegrated Concrete
Dam, Dock and Bridge Repairs
Steel Encasement and Fireproofing
Sewer, Water Pipe and Penstock Linings
Stack and Bunker Linings
Wood Pile Casings—Pressure Grouting
Prestressed Tanks and Silos

Get in touch with us for engineering data and estimates

GUNITE CONSTRUCTION CORPORATION
420 LEXINGTON AVE., NEW YORK 17, N.Y.
MURRAY HILL 3-7699

labor under the new chairman, Dr. George W. Taylor, of the University of Pennsylvania.

• **Job ahead**—Once the board is fully organized it will have to start work on two major jobs:

It will decide more than 800 cases, affecting more than 3,000,000 workers, in which approval is being asked of voluntary wage increases above the 10 percent ceiling. It will also have to revise its regulations to serve until Congress amends the Defense Production Act this summer.

Business briefs . . .

• **Industrial building up**—For the twelfth time in 18 weeks, industrial building volume as reported to ENR last week topped other classes of construction. Figure for the week was $80,000,000, making the total in this class for 1951 to date 405% above the comparable period of 1950.

• **Scrap needed**—With scrap supplies at major steel mills declining from over 50 days' supply to an average of 21 days, steel makers have made new appeals to other industry to start scrap flowing to the mills. Building demolition, manufacturing plants, railroads, machinery "graveyards" are particular targets for scrap.

• **Quick writeoff**—The Defense Production Administration granted 915 certificates of necessity authorizing five-year write-off on machinery, equipment and plant during the period Oct. 30, 1950, through April 6, 1951. Total cost of the new facilities proposed for construction exceeds $4.1 billion, and heaviest concentration of the new plants will be in the already well-developed areas of New York, New Jersey and Pennsylvania.

• **Help for N. Y. schools**—The New York City Board of Education has been assured that the federal government will "do everything possible" to expedite the city's school construction program. C. J. Bensley, chairman of the board's committee on buildings and sites, said critical materials—including 4,500 tons of steel—will be released soon to complete seven new schools already under construction.

• **Uphold contract award**—Geauga County (Ohio) Common Pleas Court has upheld the action of the Warren, Ohio, Board of Control, in awarding a $301,356 sewer contract to Victor Shutrump, Youngstown, instead of low bidder on the job. A taxpayer's suit demanded the contract be awarded the low bidder. The court agreed the board had acted in the best interest of citizens, on a showing that Shutrump could complete the job faster with better equipment than the low bidder.

Stop Expensive Slamming With the Cushioned Closing of CHAPMAN TILTING DISC Check Valves

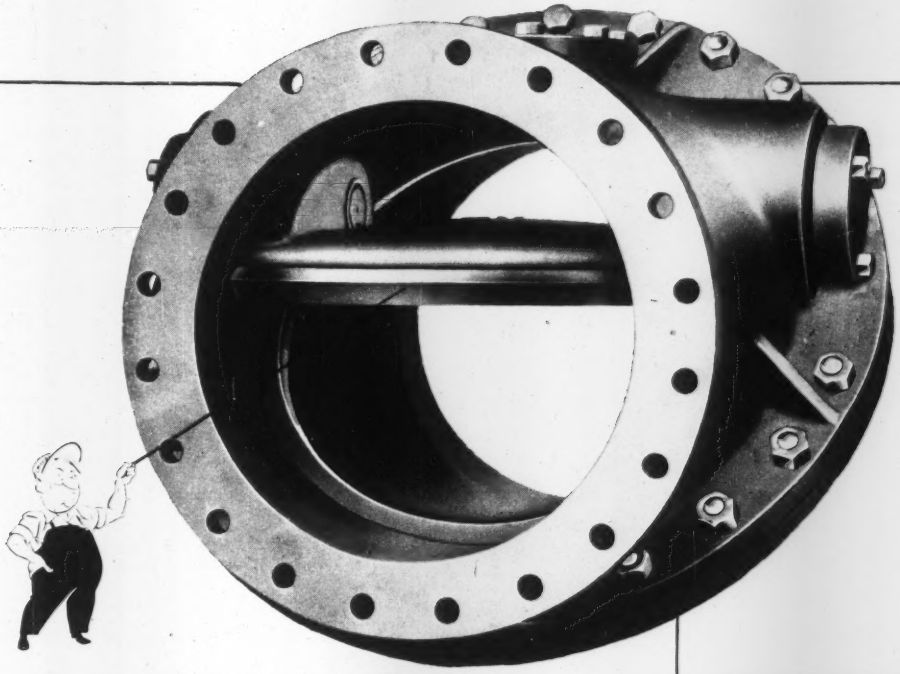

Those words — *cushioned closing* — best describe the action of this unique check valve. The tilting disc works with the stream—opens easily, closes quickly, *yet quietly.* There's no slamming — no resultant destructive stresses on the pipeline.

As a result of this smooth, *cushioned action*, maintenance costs are at a minimum and savings of from 65% to 80% in head losses can be obtained over conventional-type check valves.

Send today for the bulletin describing this unusual valve.

THE CHAPMAN VALVE MFG. CO.
INDIAN ORCHARD, MASSACHUSETTS



Cross-section of the Chapman Tilting Disc Check Valve illustrating the way that the balanced disc is supported on the pivot, with arrows showing the travel of the disc. A feature of the design is that the disc seat lifts away from the body seat when opening, and drops into contact when closing, with no sliding or wearing of the seats.

MEETS *all* OPERATING CONDITIONS

Not only does the CP-59 Sinker outperform any other drill in the 55-pound class, but it can be used for (1) plain dry, (2) blower dry, (3) plain wet, or (4) air-water operation.

This is made possible by its 4-in-1 backhead, which permits quick, inexpensive change-overs from one type of operation to another.

Its remarkably high drilling speed, exceptionally strong rotation, unsurpassed hole cleaning, excellent riding qualities—all make for fast, efficient, economical performance.

Maintenance is low because of such features as a replaceable bronze chuck rotation nut to protect piston splines from scoring, and a replaceable bronze bushing liner to make it easy to maintain piston alignment and full cushioning.

Get in touch with your nearest CP office for a demonstration of the CP-59, or write for a copy of SP-3009.

CHICAGO PNEUMATIC TOOL COMPANY

General Offices: 8 East 44th Street, New York 17, N.Y.

PNEUMATIC TOOLS • AIR COMPRESSORS • ELECTRIC TOOLS • DIESEL ENGINES
ROCK DRILLS • HYDRAULIC TOOLS • VACUUM PUMPS • AVIATION ACCESSORIES

MATERIALS AND LABOR PRICES

Market quotations on construction materials and wage rates reported monthly by ENR correspondents
June Materials, and Labor Prices will appear in June 7, 1951 issue

CEMENT, AGGREGATE, READY-MIXED CONCRETE—F. O. B. CITY

	PORTLAND CEMENT* Per bbl. C.L. lots cash. dis. not deducted			SAND AND GRAVEL Per ton, carload lots			CRUSHED STONE Per ton, carload lots		CRUSHED SLAG Per ton, carload lots, f.o.b. plant		CONCRETE BLOCK 8 x 8 x 16-in.; truckload del.; per block		CONCRETE Ready Mixed 1:2:4, over 50 c.y., del.
	Paper	Bulk	Mortar	Gravel, 1½ in.	Gravel, ¾ in.	Sand	1½ in.	¾ in.	1½ in.	¾ in.	Sand grav.	Lt. wgt. agg.	
Atlanta	$3.63	$3.35	3.39	$2.00	$2.00	$1.75	$2.10	$2.10	$1.65	$1.85	$0.186	$0.186	$11.00
Baltimore	2.68	3.37	3.33	2.50‡a	2.50‡a	2.00‡a	2.70‡a	2.80‡a	2.00‡a	2.55‡a	.17	.17a	10.80
Birmingham	3.11	2.68	2.85	2.24n	2.24n	1.94n	2.50	2.50	1.10	1.30	.165	.165	7.85
Boston	3.96	3.65	3.58	2.50q		2.50q	1.50q	1.60q	....	....	.206	.22a	11.50h
Chicago	3.29	2.99	3.94	3.00‡b	3.00‡b	3.40‡b	3.00‡b	3.00‡b	2.00‡	2.00‡	.22	.22b	11.50
Cincinnati	3.46	3.18	3.16	2.00‡c	2.00‡c	2.05‡c	2.35‡h	2.35‡h	....	....	.21	.225a	10.95f
Cleveland	N. A. in C. L.			2.05ef	1.85f	1.65	3.65a	3.65a	2.85‡	2.85‡	....	.23	13.00q
Dallas	2.95	2.65	2.70	2.15	2.15	1.84	2.22	2.38	....	....	.125e	.215	9.30
Denver	3.89	3.64	3.89	1.85	2.00	1.20	....	....	....	....	.22	.255a	10.00
Detroit	3.25f	2.98	3.04	4.00‡b	4.00‡b	3.50‡b	4.00‡	4.00‡	4.00‡	4.00‡	.19	.20a	10.50f
Kansas City	3.30	3.03	3.15	1.90‡	1.90‡	1.50a	1.90‡a	1.90‡a	....	....	.23aq	.23e	10.95h
Los Angeles	4.00a	3.52a	4.72	2.10a	2.20a	1.95a	2.08a	2.08a	....	....	.11f	.225	10.50hm
Minneapolis	3.68ed	3.37ed	3.33	2.40‡aq	2.40‡aq	1.45‡aq	2.50‡aq	2.50‡aq	....	....	.23ek	....	11.25fk
Montreal	2.66ae	2.51ae	....	2.50	2.50	1.90i	.85ujp	1.50uj	....	....	....	.16a	10.50ek
New Orleans	3.20e	2.80e	3.18	2.32	2.32	1.82	....	....	1.05	1.25	.25	....	12.90
New York	3.78	3.48	3.35	2.35bk	2.50bk	1.60bk	2.50bl	2.50bl	....	....	....	....	11.40an
Philadelphia	3.38/3.68‡	3.07/3.37‡	3.38‡	2.65‡	2.75‡	2.15‡	2.10‡	2.15‡	1.75	1.65	.22/.25	....	11.50
Pittsburgh	3.32	3.04	....	2.15‡	2.15‡	2.10‡	2.60‡	2.60‡	2.15	2.15	.23d	.23d	11.00
St. Louis	3.28/3.38b	2.94/3.10b	3.22	2.70am	2.70am	2.30/2.70am	1.70j	1.70j	1.25	1.25	.215	.27es	10.40
San Francisco	3.35	2.95	....	1.86	1.86	1.96	1.96	....	....	....	....	.26e	10.75c
Seattle	3.75a	3.25a	3.85	3.00‡bm	3.00‡bm	3.00‡bm	3.50‡bm	3.50‡bm	....	....	.24f	.3325j	10.95j

‡ Delivered. * Prices incl. dealers comm. except as noted.
CEMENT: *a* Subj. to 10¢ dis. *b* Less 2% for cash. *c* CL price dealers, comm. not incl. *d* Dealers sell only LCL. *e* Plus switching charges. *f* Paying up to $3.80 for cement brought in from outside sources. *g* Warehouse pickup.
SAND, GRAVEL, STONE & SLAG: *a* Truck lots. *b* Per cu. yd. *c* 5 tons or more. *e* ¼". *f* Pea gravel. *g* Less 5% for cash. *h* Less than 5 tons. *i* Sales tax incl. *j* F.o.b. quarry. *k* Barge lots asd. *l* F.o.b. scow Hudson river. *m* Less 2% for cash. *n* F.o.b. cars. *p* New price not available as we go to press.
CONCRETE BLOCK: *a* Cinder. *b* Waylite. *c* Haydite. *d* Celocrete. *e* 5‡ x 8 x 12 in. *f* 8 x 4 x 16. *g* F.o.b. truck at job. *i* Less 2% for cash. *j* Less 1% for cash. *k* 8x8x18.
READY MIXED CONCRETE: *a* 5 cu. yds. or over del. Man. *b* 25 cu. yds. or more. *c* 10–100 cu. brackets. *e* 2,000 lb. concr. *f* 2500 lb. comp. *g* Aver. haul 7–9 mi. zone. *h* Less 50¢ for cash. *j* 2% off for cash. *k* Sales tax included. *l* 1:2½:4. *m* F.o.b. yard. *n* Plus escalator clause.

CASH DISCOUNTS CEMENT to Contractors: Truck delivery, 2% for cash on 10th of month; on carload deliveries, no trucking, same as dealer cash discount 10c. per bbl. for payment within 15 days of date of invoice. Subject discount 10c. per bbl. 20 days in Montreal.

CURRENT MAXIMUM PRICES AT CEMENT MILLS

Charge for bags not included. For paper bags add 30¢ per bbl., not refundable

	Bulk		Bulk		Bulk		Bulk
Richard City, Tenn	$2.60†	Buffington, Ind.	$2.55†	Steelton, Minn.	$2.65†	Muskegon, Mich.	$2.70†	Toledo, O.	$2.60†
Clinchfield, Ga.	2.60†	Independence, Kan.	2.50†	Leeds, Ala.	2.45†	Saginaw, Mich.	2.60†	Milwaukee, Wis.	2.75†
Kingsport, Tenn.	2.60†	Hannibal, Mo.	2.55†	Duluth, Minn.	2.65†	Wyandotte, Mich.	2.60†	Green Bay, Wis.	2.75†
West Des Moines, Iowa	2.65†	Northampton, Pa.	2.60†	Hudson, N. Y.	2.60†	Buffalo, N. Y.	2.60†	Iron on, O.	2.60†
Nazareth, Pa.	2.60†	Universal, Pa.	2.65†	Alpena, Mich.	2.50†	Oswego, N. Y.	2.75†	Montreal City	2.31
Bath, Pa.	2.60†	Waco, Tex. (+ 10¢ tax)	2.50†	Detroit, Mich.	2.60†	Cleveland, O.	2.60†	W. Winfield, Pa.	2.65†

†*Prices to hold for second quarter of* 1951.

PAVING BRICK, BLOCK, ASPHALT, ROAD OILS—F. O. B. CITY

	PAVING BRICK AND BLOCK Granite Per M lots of 50,000 4x4x8 in.	Brick per M 3x4x8½ in. carload lots	Wood per sq. yd. 3½ in. 16-lb. treat	PAVING ASPHALT Per ton, less than 80 penetration Tank car	Drums	ASPHALT BINDERS—FLUXES Per gal., 80–300 penetration Tank car	Drums	CUTBACK ASPHALT Per ton Tank car	Drums	ROAD OIL Per gal. Tank car	ASPHALT EMULSION (Quick-breaking) Per gal. Tank car	Drums
Atlanta	$73.00	$35.00	$2.25	....	....	....	....	....	....	....	....	....
Baltimore	150.00‡	57.70‡	.....	$22.00	.....	$21.00n	$0.15	$.09n	$.17n	$.09n	$.99	$0.12
Birmingham	.....	45.50i	.....	....	....	....	....	....	....	....	....	....
Boston	.....	.....	.....	24.50a	$35.50a	22.00e	35.50e	.105a	.22	.09q	.095	.22
Chicago	155.00‡	90.00‡b	4.50/4.60‡f	20.25b	30.25b	19.25bw	29.25bw	.0875bw	.16w	.075b	....	....
Cincinnati	.....	.....	.....	....	....	....	....	....	....	....	....	....
Cleveland	180.00	55.00d	4.83g	26.50	38.50	26.50x	38.50x	.12w	.24w	.115	.14	28
Dallas	e	40.00	e	23.95	42.99	.1012	.1898	26.99	47.77	.0987	.1062	.1423
Denver	.....	48.00	.....	....	....	....	....	....	....	....	....	....
Detroit	.....	92.00	.....	26.25	....	9.30w	.....	.1162w	.....	.092	.....	.215
Kansas City	e	e	e	18.55el	17.55c	....	.....	.0725cw	.....	.0635e	.....	.....
Los Angeles	e	.....	e	15.50dmx		15.50dzx	.....	17.00dx	.....	16.00dx	.0825f	.1525f
Minneapolis	.....	.....	2.83h	26.50	36.50	24.50x	35.50x	25.00	35.50	.095	.1225	.2225
Montreal	137.00	e	e	27.00n	36.65n	16.70nu	18.70nu	16.30nu	18.30nu	15.20ns	.184ns	.225ns
New Orleans	.....	.....	.....	17.50e	.....o	17.50ew	.....o	.08ew	.....o	.0882	.085	.....
New York	.....	.....	3.10f	25.50	28.02q	24.50x	44.04qx	.1040w	.1819qw	.1040	.1046	.1847q
Philadelphia	175.00	110.00	4.06	22.00	....	22.00x	.....	.095w	.....	....	....	....
Pittsburgh	165.00	48.00	4.60	22.00	36.00	.10	.20	27.00	39.00	.095	.09	.20
St. Louis	.....	.....	.....	19.25f	....	.1698	.....	.0865	.089w	.15	....	....
San Francisco	.....	63.73e	.....	17.00q	32.50qp	17.50qks	.....	19.00ks	.....	17.50s	.085	.145
Seattle	.....	.....	.....	17.00h	37.50h	16.75hx	.....	19.50h	23.50hr	18.50hs	.09h	.10h

‡ Delivered.
PAVING BRICK & BLOCK: *a* CL. *b* 3½ x 4 x 8½. *c* 2½ x 8½ x 4. *d* LCL, truck deliveries. *e* Not used. *f* 2" interior 6# treat. *g* 3". *h* 8# treat. *i* 3 x 3½ x 8½.
ASPHALTS: *a* Price at plant, Everett, Mass. *b* F.o.b. refinery, Lockport, Ill. *c* F.o.b. Sugar Creek, Mo. *d* F.o.b. refinery, El Segunda. *e* F.o.b. Baton Rouge. *f* F.o.b. Wood River or Roxana, Ill. *g* F.o.b. Richmond, Calif. *h* F.o.b. Martinez. *i* Bulk refinery. *j* F.o.b. refinery, Englewood, Calif. *k* 5–10 penet. *l* Less than 100 penetr. *m* 40–80 penetr. *n* Tax incl. *o* Drums not avail. *p* Shipped in steel bbl. *q* Used drums. *r* In customer's drums. *s* Shipped in drums, per drum. *u* Per 100 gal. *w* Per gal. *x* Also tank trucks. *z* Per ton.

IRON AND STEEL PRODUCTS—PER 100 LBS. BASE MILL PRICES

	STRUCTURAL SHAPES	PLATE CARBON STEEL	REINF BARS billet	RIVETS ½-in. structural	SHEET PILING	STEEL RAILS Per Net Ton Base	Standard	Light	Re-rolled	TRACK SUPPLIES Angle Bars	Std Stakes	Tie Plates	Track Bolts
Birmingham Area	$3.65	$3.70	$3.70	$7.85		$7.2.00	$80.00	Not		$4.70	$6.15	$4.50	....
Chicago Area	3.65	3.70	3.70	7.85	$4.45	72.00	80.00	avail-		4.70	6.15	4.50	....
Pittsburgh Area	3.65	3.70	3.70	7.85	4.45	72.00	80.00	able		4.70	6.15	4.50	....
Buffalo Area	3.70	3.70	3.70	7.75	4.45	72.00	80.00			4.70	6.15	4.50	$9.85
Cleveland	....	....	3.70	7.85	....	....	....	....	....	....	....	....	9.85
Youngstown Area	....	....	3.70	....	....	....	....	....	....	....	6.15	....	....
Geneva	3.65	3.70	....	....	....	....	....	....	....	....	....	....	....
Los Angeles	....	....	4.40	....	....	....	....	....	....	....	6.15	....	....
Pueblo	3.65	3.70	3.70	....	....	72.00	80.00	....	....	4.70	6.15	4.50	9.85

IRON AND STEEL PRODUCTS—F. O. B. WAREHOUSE, PER 100 LBS., BASE PRICE

	STRUCTURAL SHAPES Per 100 lb. base price	REINFORCING BARS Per 100 lb., base price *u* 5 tons to carload lot *b* New billet	Rail steel	Add switch	$/cwt for Del.	EXPANDED METAL LATH *k* Per 100 sq. yd., carload lots Std. diamond mesh, 3.4 lb.	Std. ribbed 3.4 lb.	WELDED FABRIC REINFORCING *d* Per 100 sq. ft., carload lots 4x16 in., No. 5 & 10 wires	4x12 in., No. 8 & 12 wires	6x6 in., No 6 & 6 wires
Atlanta	$6.23	$6.05	$6.05	$.025	$.10	$31.50	$31.50			
Baltimore	6.54	5.49*l*	....	....	.10	42.00	45.00			
Birmingham	5.70	5.75	5.75	.05	.15	47.00*p*	52.00*p*			
Boston	6.40*k*	6.19*k*	6.19*kc*	....	.10/.15	39.00	45.00			
Chicago	5.70	4.95*ff*	4.95*ff*	.0625	....	34.50‡	38.50‡			
Cincinnati	6.24*kr*	5.84*r*	....	....	....	38.50*uzee*	41.50*uzee*			
Cleveland	5.82	4.81*v*	....	....	.10	37.00‡	40.00‡			
Dallas	8.85	7.00	7.00	....	....	49.00	52.00			
Denver	7.20	7.10*c*	....	....	....	60.00*s*	72.00*ys*			
Detroit	6.09	5.59*n*	....	....	.10	53.00	58.00			
Kansas City	6.30*en*	5.90*d*	5.90*d*	....	....	38.00	40.50			
Los Angeles	6.45*hh*	6.15*q*	....	....	.15	48.00	54.00*kk*			
Minneapolis	6.16*hhq*	7.32*ll*	7.32*ll*	....	.15	37.00	40.00			
Montreal	6.75*z*	4.75*x*	4.75*q*	....	....	44.10*h*	46.80*h*			
New Orleans	....	5.55*ok*	....	.05	.10	40.00	40.00			
New York	6.30*r*	6.25	6.25	....	.30	38.50*at*	45.00*at*			
Philadelphia	5.90*k*	5.95*k*	....	....	....	38.00‡	42.00‡			
Pittsburgh	5.40–5.60	5.40–5.60	....	....	.10	34.00	36.00			
St. Louis	6.03	5.34*c*	5.34*c*	....	....	47.00*aa*	53.00*aa*			
San Francisco	7.15*n*	5.75*d*	....	....	.15	40.50	43.50			
Seattle	4.05*e*	5.35*el*	....	....	....	57.00*mm*	47.00*mmx*			

A.P.M.* Joliet, Illinois, Donora, Penn., $2.66
F.o.b. Mill: Monessen, Penn., $2.76

A.P.M.* Joliet, Illinois, Donora, Penn. $1.87
F.o.b. Mill: Monessen, Penn., $1.93

A.P.M.* Joliet, Illinois, Donora, Penn., $2.79
F.o.b. Mill: Monessen, Penn., $2.89

* At Producing Mill.

‡ Delivered. *b* 1–5 tons, add 35¢. Less than 1 ton, add 50¢. *c* 20 tons or over base. *d* Mill price plus freight. *e* F.o.b. plant. *f* Includes delivery in free delivery zone. *g* 10,000 to 39,999 lbs. *h* List price. Dominion tax exempt. Provincial and Municipal tax extra. *i* Plus Dominion, Provincial and Municipal sales tax. *j* Price per ton. *k* F.o.b. city. *l* Intermediate and hard grade, new billet. *m* Per sq.yd. *n* 5–10 tons. *o* 5 to 15 tons base. *p* Del. of 500 sq. yd. or more. *q* Std. ribbed, 4 lb. per sq. yd. *r* 5 tons or over. *s* LCL. *t* Asphalt coated. *u* Note: Revised size extra—1 in., 1¼ in., 1½ in., 1¾ in., 2 in., ¼ in., 15¢, ⅜ in., 25¢, ½ in., 30¢, ⅝ in. 80¢, ¾ in. $1.90. *v* 20 tons. Straight. *w* Copper bearing. *x* 2.5 lb. per sq. yd. *y* $0.0093 transportation tax included. *z* Copper alloy. *aa* Delivered truck to job. Contractor to do unloading. *dd* F.o.b. dock. *ee* F.o.b. cars. *ff* Carload lots. *gg* Including sales. *hh* 10,000 to 19,999 lbs. *ii* Rolled at Geneva mill. 400–999 lbs. *kk* 2" ribbed. *ll* 5 to 8 tons, f.o.b. city. *mm* 2% off for cash. *nn* 1–5 tons. ‡ 10 tons to CL. *a* $6.10 was for 10 tons and over.

PLUMBING, HEATING, WATER, SEWER AND DRAIN PIPE

	C.I. PIPE Per net ton f.o.b. 6 in. to 24 in. *a*	VITRIFIED SEWER PIPE Per foot, Delivered ASTM C13-44T std. 8 in.	std. 12 in.	24 in.	36 in.	CLAY DRAIN TILE ASTM C4-24 Per 1,000 ft., carload lots, f.o.b. 6 in.	8 in.	CONCRETE SEWER PIPE Per ft., delivered: ASTMC 14-41 12 in.	24 in.
Atlanta	$89.00	$0.43	$0.67	$3.39	$7.00	$114.00	$140.00	$0.45	$2.00
Baltimore	100.00	.59	1.0395	4.26	11.275	178.20	274.80	.90	2.45
Birmingham	95.00	.42	.75	2.39	....	210.00‡	375.00‡	1.25*m*	2.75*m*
Boston	113.00	.532*arr*	1.026*arq*	4.41*arq*	11.685*arq*	187.80*r*	289.20*r*	1.55*mq*	3.80*mq*
Chicago	107.00	.65	1.25	5.10	13.50	150.00‡	270.00‡	.80	2.80
Cincinnati	106.00	.567	1.0935	4.455	11.685	154.80	239.70	.73*m*	2.80*m*
Cleveland	108.00	.462*x*	.891*x*	3.69*x*	10.045*x*	147.00	229.00	.80*m*	3.00*m*
Dallas	107.00	.430	.822	3.234	9.17	.....	.....	.49	1.60
Denver	115.00	.43*dd*	.74*dd*	3.18*dd*	....	.....	.....	.74*m*	2.50*m*
Detroit	108.00	.70	1.35	5.35	14.40	240.00*m*	360.00*m*	.80	3.20
Kansas City	106.00	.50	.88	3.50	....	216.70	....	.70	3.00*fj*
Los Angeles	122.00	.54*l*	1.07*l*	5.24*l*	13.06*l*	228.20	348.90	.85	2.40*jf*
Minneapolis	102.86–112.00	.66*mo*	1.20*mo*	4.85*mo*	....	.....	.....	1.35*h*	3.85*h*
Montreal	100.00	.77*z*	1.35*z*	4.47*z*	7.23*ez*	.....	.....	72.00*kaa*	218.00*khaa*
New Orleans	101.50	.486	.90	5.00	....	251.00*bb*	441.00*bb*	.65	2.29
New York	111.00	.70	1.19	4.77	12.71	.....	.....	1.05	2.20
Philadelphia	110.00	.65	1.25	4.95	12.65	300.00‡	350.00‡	1.55*h*	3.75*h*
Pittsburgh	109.00	.585*m*	.752*m*	2.83*m*	7.622*m*	147.50	230.00	1.05*h*	2.50*h*
St. Louis	103.00	.51	.93	3.65	8.50	.....	.....	1.35*d*	3.00*hl*
San Francisco	122.00	.61*d*	1.20*d*	5.03*d*	12.57*d*	240.00*dll*	400.00*dll*	.95	3.20
Seattle	124.00	.516	.916	....	....	150.00*c*	....	.86*cc*	2.64*cc*

‡ Delivered. *a* Class B & heavier. *b* Based on existing freight rates; subject to rate change. *c* Gas pipe and class A, $.55 per ton additional. 4 in., $7 per ton additional. 30 in. and larger, usually $1 per ton less. *d* Extra strength ASTM C 200-41T. *e* 4-in., $90. *f* ASTM C361-A. *g* Culvert pipe. Reinforced, ASTM C76-41. *h* Reinforced, ASTM C75-41. *i* Reinforced, ASTM C76-37. *j* Centrapipe. *k* Per 100 ft. *l* F.o.b. plant. *m* Truck delivery. *n* Listed price is based on LCL (no minimum). *p* Less than 5 tons, per price per ft. *r* Within switching limits. *u* ASTM C13-40. *z* C.L. f.o.b. origin, freight allowed. *ez* 2 ft. lengths. *y* 3 ft. lengths. *x* CESA A 60-1941 specifications used. *aa* No. standard specifications in Can. *bb* Freight allowed to destination in city. *cc* Truck loads; f.o.b. plant, Newton. *dd* LCL, delivered, f.o.b. truck. *ee* 1% off for cash. *ff* 21".

*WROUGHT STEEL PIPE—(Full standard weight)

Mill	3½ to 6 in. Lap Weld‡ Black %	Galv. %	2½ & 3 in. Butt Weld‡ Black %	Galv. %	
Lorain, Ohio	36.5*a*	15.5*a*	24.0	22.0	*a* 3½ to 4 in.
Aliquippa, Pa.	36.5*a*	15.5*a*	24.0	22.5	
Sparrows Pt., Md.	38.0*e*	18.0*e*	24.0	22.0	
Youngstown, O.	33.5*a*	15.5*a*	25.0	23.0	
Indiana Harbor, Ind.	35.5*a*	17.5*a*	24.0	22.0	
Benwood, W. Va.	38.5*a*	18.5*a*	24.0	22.5	
Wheatland, Pa.	38.0*b*	18.0*b*	24.0*b*	22.5	
Etna, Pa.	38.5*b*	18.5*b*	24.0*b*	22.0	
Fontana, Calif.	24.0*ab*	10.0*ab*			

‡ Threaded and coupled. *a* 3½ to 4 in. *b* Continuous weld. *e* 6 and 8 in.

Mill: Sharon, Pa. Wheatland, Pa. Etna, Pa. Fontana, Calif.

*WROUGHT STEEL PIPE: Discounts from standard list consumers carload prices. Base price approx. $200 per net ton. List prices per ft.: *Butt Weld:* ¼ in., 5½¢; ⅜ in., 6¢; ½ in., 6¢; ¾ in., 8½¢; 1 in., 11½¢; 1 in., 17¢; 1¼ in., 23¢; 1½ in., 27½¢; 2 in., 37¢; 2½ in., 58½¢; 3 in., 76½¢. *Lap Weld:* 3½ in., 92¢; 4 in., $1.09. 5 in., $1.48; 6 in., $1.92. Freight rates to destination to be added to price plus 3 percent tax on transportation.

WROUGHT IRON PIPE: List prices per ft. same as wrought steelpipe. Discount for Pittsburgh base. *Butt Weld*—1 in. and 1¼ in. black, + 20.0, galv, + 48.0; 1½ in. black, + 14.0 galv. + 44.5; 2 in. black, 4 galv. + 34.5. *Lap Weld*—2½ in. to 3½ in. black + 20.5, galv. + 47.5; 4½ in. to 8 in. black + 17.5, galv. + 43.0. Freight rates to destination to be added to name delivered price.

LUMBER, TIMBER, PLYWOOD—PER M FT., B.M., CARLOAD LOTS F. O. B.

SHORT LEAF YELLOW PINE AND DOUGLAS FIR

All S. L. Y. P. is No. 2 common or better and for No. 1 N. C. Box. (Prices in Bold Face)
All Fir boards, dimensions, planks No. 2. Fir small timbers and timbers are No. 1. Lengths up to 20 ft.
(Prices in italics)

	1x6 s4s	1x8 s4s	2x4 s4s	2x6 s4s	2x8 s4s	2x10 s4s	3x12 Rgh	6x12 Rgh	12x12 Rgh
Atlanta	† **$75 00**	**$78 00**	**$69 50**	**$69 50**	**$74 50**	**$78 00**	**$77 50**	.....	.....
Baltimore	* **91 50**	**94 00**	**79 50**	**85 00**	**85 00**	**90 00**	**95 00**	.....	.....
	112 50g	*112 50g*	*112 50g*	*112 50g*	*112 50g*	*112 50g*	*116 50*	*$116 50*	*$116 50*
Birmingham	† **83 00**	**83 00**	**70 00**	**80 00**	**83 00**	**85 00**	**95 00**	.....	.....
	85 00	*85 00*	*75 00*	*80 00*	*80 00*	*79 00*	*85 00*	*85 00*	*85 00*
Boston	* **99 00***a*	**106 00***a*	**99 00***a*	**100 00***a*	**104 00***a*	**105 00***a*	.....	.....	.....
	98 00	*99 00*	*110 00*	*110 00*	*110 00*	*110 00*	*116 00*	*116 00*	*116 00*
Chicago	** **106 00**	**108 00**	**95 00**	**98 00**	**98 00**	**106 00**	**110 00**	.....	.....
	111 00	*111 00*	*115 00*	*112 00*	*112 00*	*112 00*	*115 00*	*115 00*	*115 00*
Cincinnati	* **104 50**	**106 70**	**93 50**	**98 00**	**105 60**	**105 00**	**121 00**	.....	.....
	145 50	*147 50*	*143 50*	*153 50*	*141 00*	*141 00*	*147 50*	*143 00*	*143 00*
Cleveland	** **97 00**	**99 00**	**95 00**	**97 00**	**99 00**	**105 00**	*136 00*	*136 00*	*136 00*
Dallas	†† **78 00**	**80 00**	**69 00**	**58 00**	**59 00**	**59 00**	**98 00**	.....	.....
Denver	* *Not in stock*		*143 00*	*134 00*	*135 00*	*135 00*	*137 00*	*156 00*	*156 00*
Detroit	‡ **106 00**	**109 00**	**103 00**	**108 00**	**110 00**	**114 00**	.....	.....	.....
	103 00	*104 00*	*105 00*	*105 50*	*104 50*	*103 25*	*120 00*	*120 00*	*120 00*
Kansas City	* **125 00**	**125 00**	**125 00**	**125 00**	**125 00**	**125 00**	.....	.....	.....
	125 00	*125 00*	*125 00*	*125 00*	*125 00*	*125 00*	*145 00*	*155 00*	*155 00*
Los Angeles	3 *105 00*	*105 00*	*103 00*	*103 00*	*103 00*	*103 00*	*120 00*	*130 00*	*120 00*
Minneapolis	*a 130 00*	*130 00*	*130 00*	*130 00*	*130 00*	*130 00*	*150 00*	*150 00*	*150 00*
Montreal	*ab 92 00*	*98 00*	*93 00*	*95 00*	*107 00*	*109 00*	.....	.....	.....
	175 00	*175 00*	*175 00*	*175 00*	*175 00*	*175 00*	*140 25*	.....	.....
New Orleans	4 **130 00**	**135 00**	**120 00**	**125 00**	**120 00**	**140 00**	**135 00**	.....	.....
New York	3 **109 112**	**112 115**	**105 115**	**115 120**	**120 125**	**125 130**	**150 160**	.....	.....
			Range from $120.00 to $125.00				*145/150*	*145/150*	*145/150*
New York	** **91 00**	**93 00**	**78 00**	**90 00**	**93 00**	**95 00**	**120 00**	.....	.....
	105 00	*105 00*	*112 00*	*112 00*	*112 00*	*112 00*	*115 00*	*125 00*	*125 00*
Philadelphia			**Range from $117.00 to $127.00**				**117 127**	.....	.....
			Range from $130.00 to $140.00				*130/140*	*140/150*	*140/150*
Pittsburgh	†		**Range from $85.00 to $90.00**			**90 100**	**90/105**	.....	.....
			Range from $95.00 to $105.00			*95/105*	*105/120*	*140/150*	*140/150*
St. Louis	*fc* **124 50**	**126 50**	**110 75***d*	**120 50**	**125 00***e*	**135 00***d*	.....	.....	.....
	.....	.....	*136 75*	*136 25e*	*136 25e*	*135 00e*	*152 50e*	*164 50*	*164 50*
San Francisco	*A† 75/80*	*75/80*	*75 80*	*75 79*	*75 79*	*74/78*	*75 78*	*77 82*	*77 82*
Seattle	† *82 50g*	*82 50g*	*82 50g*	*82 50g*	*82 50g*	*82 50g*	*82 50g*	*82 50g*	*82 50g*

	2x12 Rgh	12x12 Rgh
Atlanta		
Baltimore	**$152 00**	**$152 00**
Birmingham	**115 00**	**130 00**
Boston	.....	.....
Chicago	**140 00**	**140 00**
Cincinnati	**154 00**	**154 00**
Cleveland	.....	.....
Dallas	**108 00**	**98 00**
Denver	.....	.....
Detroit	**125 00**	.....
Kansas City	.....	.....
Los Angeles	.....	.....
Minneapolis	.....	.....
Montreal	.....	.....
New Orleans	**180 00**	**200 00**
New York	**210 240***f*	**210 240***f*
New York	.....	.....
Philadelphia	**190 200**	**190 200**
Pittsburgh	**95 100**	**110 120**
St. Louis	.....	.....
San Francisco	.....	.....
Seattle	.....	.....

LONG LEAF Y. P. Merchantable grade up to 20 ft.

PLYWOOD Rail freight increment (See note for base price)

	3/8"	3/4"
Atlanta	*$22 32*	*$27 24*
Baltimore	22 86	27 90
Birmingham	21 78	26 58
Boston	22 86	27 90
Chicago	18 72	22 80
Cincinnati	21 78	26 58
Cleveland	22 20	27 12
Dallas	18 72	22 80
Denver	13 92	16 98
Detroit	21 78	26 58
Kansas City	16 56	20 16
Los Angeles	13 38*ab*	16 26*ab*
Minneapolis	16 56	20 16
Montreal	.....	.....
New Orleans	18 72	22 80
New York	22 86	27 90
New York	.....	.....
Philadelphia	22 86	27 90
Pittsburgh	22 56	27 48
St. Louis	18 72	22 80
San Francisco	10 08*a*	12 30*a*
Seattle	.....	.....

† F.o.b. mill. * F.o.b. city, CL, out of yard. ** F.o.b. city, CL, direct mill shipment. ‡ Deliv. to contr. CL. 1. Retail, LCL, at yard. *f* Retail, LCL, deliv. 2. Deliv. truck lots. 3. asd. 4. Retail, truckload.

LUMBER: **Bold Face type, Southern Pine.** *Italics, Douglas Fir.* *a* Spruce *b* Tax exempt. *c* 5M lots. *d* 8–12 ft. lengths. *e* 8–16 ft. lengths. *f* 18 ft. or under. *g* No. 1 common. *i* 8 ft. lengths. *k* No. 3 common

A Rail freight rate from Northwest mills to San Francisco are $11.50 to $15.00 per M ft bm. From Northern Calif. mills $9.00 by rail $12.00 by truck to yard with surfaced stock $2.00 to $3.00 less.

PLYWOOD: Special concrete form grade Fir Plywood, 4' by 8' panels, 5-ply, sanded 2 sides, water resistant glue, carload lots, delivered per 1,000 sq. ft. surface. Seattle base price on 1", $204.00; on 1", $231.00. For other centers add rail freight increment from table on proper size. Oiling and edge sealing charges included. *a* Lower rate by water shipment. *b* 50,000 lb. minimum. * Freight rate increase of 6¢ per cwt., not included in these figures.

GLASS, EXPLOSIVES, CHEMICALS

	WINDOW GLASS: Discounts from jobbers list, Feb. 1, 1950*a*, Single or Double Thickness, A quality	WINDOW GLASS: Discounts from jobbers list, Feb. 1, 1950*a*, Single or Double Thickness, B quality	EXPLOSIVES: Per lb. 40% Ammonia Gelatin in 50 lb. cases delivered in 200 lb. lots*
Atlanta	76%*e*	76%*e*	$0.2275
Baltimore	70–10%	78–10%	.2275
Birmingham	83%	83%	.1750
Boston	79–10%	79–10%	.2275
Chicago	78%*f*	78%*f*	.2275
Cincinnati	78%	78%	.2275
Cleveland	78–10–10%*f*	78–10–10–10%*f*	.2675
Dallas	75%	75%	.2350
Denver	81–5%	81–5%	.2325
Detroit	78–10–10%	78–10–10%	.2275
Kansas City	80–10–10%	80–10–10%	.2325
Los Angeles	75%	80%	.23
Minneapolis	78–10%	78–10%	.2325
Montreal	40–5%*bc*	40–10–5%*bc*	20.00*hi*
New Orleans	78%	78%	.2325
New York	82%*f*	82%*f*	.38*g*
Philadelphia	76%*f*	78%*f*	.2275
Pittsburgh	82%	82%	.20
St. Louis	70–10%*e*	70–10%*e*	.2325
San Francisco	70%	76%	.2275
Seattle	52%*e*	53%*e*	.23

Price of 60% Ammonia Gelatin is $0.0125 per lb. higher than 40%

Glass; *a* Jobbers' list price per box, 14 x 20, ss, $42.75 for A quality, $37.50 for B quality; 14 x 20, ds, $60.00 for A quality, $52.75 for B quality. *b* Discount from list, Sept. 1939; sales tax included, but 6% tax exemption not allowable for. *c* Single thickness. *e* Discount from list of Jan. 16, 1946. *f* Disc from Oct. 1950.

Explosives; * Urban prices influenced by service charges or local storage and delivery regulations do not consistently reflect quantity prices in less congested areas. *g* In borough of Kings, Queens, and Richmond and in Manhattan south of Canal St., add delivery charge of $9.00 per trip. *h* F.o.b. city per 100 lb. forcite, 40%. Forcite 60%, $21.75. *i* F.o.b. Beloeil (near Montreal).

40% Ammonia Gelatin price ranges in other than urban areas, per lb. (except Seismograph Grades)

	C/L 20,000 lb. net	Tons	200 lb. lots
E. of the Miss., except Fla. and Me.	$0.175	$0.2075	$0.2275
W. of Miss. to Rocky Mtn. States, Fla. and Maine	.18 – .1875	.2125– 22	.2325– 24
Rocky Mtn. States	.18 – .1925	.2125– 22	.2325– 245
Pacific N. W. States	.1775– 19	.21 – .2225	.23 – .2425
Pacific S. W. States	.175 – .1825	.2075– 21	.2275– .2325

PILES, TIES F. O. B.

PILES

Prices per linear foot, fir and pine, bark off, f.o.b. cars, New York. Fir based on Wash. and Ore. points to New York shipping area; pine based on freight from Norfolk.

Dimensions	Points	Length	By Rail: Pine*	By Rail: Fir
12-in. at butt	6-in.	30 to 50-ft.	$0.43	....
12-in.—2-ft. from butt	6-in.	50 to 59-ft.	.46	....
12-in.—2-ft. from butt	6-in.	60 to 69-ft.	.50	....
12-in.—2-ft. from butt	6-in.	90 to 100-ft.	....	....
13-in.—3-ft. from butt	5-in.	91 to 100-ft.	....	....
14-in.—2-ft. from butt	6-in.	50 to 69-ft.	.50/.60	....
14-in.—2-ft. from butt	6-in.	70 to 79-ft.	.65	.85
14-in.—2-ft. from butt	5-in.	80 to 85-ft.	.75	.86
14-in.—2-ft. from butt	5-in.	85 to 89-ft.	....	.92
14-in.—2-ft. from butt	5-in.	90 to 100-ft.	....	.94

* Pine piling over 80-ft. available only in limited quantities.

RAILWAY TIES

Prices f.o.b. per tie for carload lots:		6"x8"x8' Untr.	6"x8"x8' Tr.	7"x9"x8'6" Untr.	7"x9"x8'6" Tr.
Boston	Oak	.....	.....	.....	.....
	Pine	.....	.....	.....	.....
New York	S. L. Sap Pine	$1.65	$3.00	$2.25	$3.40
	Mixed Oak	2.00	3.20	2.50	3.70
Birmingham	Hardwood	2.00	3.13*a*	2.68	4.16*a*
Chicago	Red Oak	.....	4.00	.....	5.00
Los Angeles	Douglas Fir	.....	.....	.....	.....
	Redwood	.....	.....	.....	.....
Philadelphia	Red Oak	2.15/2.33	3.10/3.13*a*	3.00/3.10	4.15/4.25*a*
St. Louis	White Oak	2.88	3.57	.....	.....
	Red Oak	2.78	3.43*a*	3.45	4.42*a*
	Sap Pine or Cypress	3.26*a*	.....	4.17	.....
San Francisco	Douglas Fir	2.58*e*	3.84*ef*	3.39*bf*	5.04*eaf*
Montreal	Birch or Maple	*h*	*h*	*h*	*h*

Tr.—Treated; Untr.—Untreated. *a* Creosoted. *b* 7" x 9" x 8'. *e* Empty cell. *e* Green. *f* F.o.b. cars. *h* No constant price available. *i* Not available.

CHEMICALS

Water, sewage treatment, road work, f.o.b. carlots, New York

Bleaching powder in drums f.o.b. works, per 100 lb.	$6.00
Chlorine cylinders, liquid, per lb. f.o.b. works	.0875
Calcium chloride, 77–80%, flaked, 100-lb. paper bag, f.o.b. works, ton	25.00
Silicate of soda, 52 deg., in drums, f.o.b. works, per 100 lb.	2.20
Soda ash, 58%, in paper bags, per 100 lb. dense	1.60
Sulphate of aluminum, commercial, in 100-lb. bags f.o.b. works	1.65
Sulphate of copper, in bags, 99% per 100 lb. f.o.b. works	8.95

STRUCTURAL CLAY BUILDING TILE, BRICK AND LIME—DELIVERED

	STRUCTURAL CLAY TILE — PARTITION — SCORED			STRUCTURAL CLAY TILE — LOAD BEARING — SCORED			BRICK		LIME	
	Per M, lots of 2,000 pieces or over,			Per M, lots of 2,000 pieces or over,			Per M, in quantity		Per ton, In paper, Carload lot,	
	3x12x12 in.	4x12x12 in.	8x12x12 in.	8x12x12 in.	10x12x12 in.	12x12x12 in.	Common backing	Straight hard	Hydrated finishing	Common hydrated	Pulverized, or lump
Atlanta	.....	.....	.....	.....	.....	.....	$26.75	$26.75	$19.00	$17.50	$17.50
Baltimore	$180.00	$191.00	$358.00	$402.00	530.00	605.00	37.00*k*	42.00*k*	30.00	20.60	.....
Birmingham	118.00*r*	128.00*p*	236.00*p*	283.00*p*	.....	.....	24.50*ff*	28.00*pp*	26.37	17.10	.....
Boston	149.00*t*	161.50*t*	298.00*t*	358.00*t*	.....	.....	33.50*u*	36.50*u*	32.30*t*	27.90*t*	.....
Chicago	135.00	145.00	280.00	.....	.....	.....	21.00	23.00	30.80	26.00	.....
Cincinnati	185.00*j*	197.00*j*	340.00*jdd*	.....	.....	.....	43.00*j*	46.00*j*	26.00*j*	24.25*j*	.....
Cleveland	149.00*ee*	156.00*ee*	.....	.....	.....	.....	32.00	32.00	25.50*r*	23.50	31.00*ee*
Dallas	.....	110.00	.....	.....	.....	.....	18.75	.....	31.90	21.80	.....
Denver	.....	.....	.....	.....	.....	.....	34.00	40.00	34.80*bbb*	28.00*bb*	34.00*bb*
Detroit	118.18	126.08	236.40	.....	293.30	$335.20	33.50*cc*	32.50*cc*	32.00	32.00	.....
Kansas City	115.00	122.50	245.00	245.00	305.50	367.00	26.00*o*	26.00*o*	30.50	24.50	27.00
Los Angeles	*r*	*r*	*r*	*r*	*r*	*r*	26.00‡	.....	34.00	34.00	35.00
Minneapolis	171.50*p*	192.50*p*	386.00*p*	192.50*wp*	.....	.....	32.00*op*	36.00	37.00*bbe*	28.00*bbe*	38.00*bde*
Montreal	143.00*xq*	157.00*xu*	292.00*xu*	.....	.....	.....	26.50	36.50	24.60	.....	20.00*u*
New Orleans	170.00	170.00	310.00	.....	.....	.....	31.00	.....	38.00	26.00	37.50
New York	121.60*h*	129.70*h*	178.30*ch*	194.60*hn*	.....	.....	38.50	.....	38.00	32.00	.....
Philadelphia	126.30	134.80	252.60	302.74	361.35	455.74	29.00	32.00	36.00	21.50	28.50
Pittsburgh	112.00	117.00	189.00	216.00	279.00	317.00	32.00	40.00*y*	25.00	23.00	2.97*m*
St. Louis	136.00*cc*	156.00*cc*	226.00*cc*	307.50*cc*	345.00*cc*	.....	40.00*dd*	36.25*dd*	85*aaa*	65*aaa*	1.10*aaspec*
San Francisco	156.85*s*	177.10*s*	245.30*dds*	187.20*rs*	.....	.....	35.00	.....	26.30	26.30	2.58*m*
Seattle	160.00*cc*	175.00*cc*	.....	175.00*ccw*	.....	.....	39.00*s*	49.00*s*	37.50*shh*	1.50*t*	3.90*mhh*

† F.o.b. yard Roxbury. *a* Smooth. *b* Per 50 lb. bags. *c* 6 x 12 x 12 in.-3 cell. *d* Pulverized hot. *e* 5%, 10th following month. *g* 5½ x 8 x 12. *h* F.o.b. trucks, job site N.Y.C. *i* F.o.b. warehouse only. *j* Truck load or over. *k* $1.00 discount. *l* Red face. *m* Per bbl., 180 lb. *n* 7½ x 7½ x 12. Speed title. *o* F.o.b. Buffalo. *p* Truck lots. *q* Provincial and Municipal tax extra. *r* Not used because of earthquake danger. *s* 2% discount for cash. *t* 5½ x 8 x 11½. *u* Tax exempt. *v* Sand lime. *w* 5 x 8 x 12. *y* Stacked *z* Pebble lime price per 80 lb. sack. *aa* Price per sack. Lime not sold per ton *bb* LCL. *cc* Truck delivery. *dd* 6 x 12 x 12. *ee* Pebble lime. *ff* 80% common *gg* Select. *hh* LCL. ‡ F.o.b. plant. # Per 60 lb sack, no incr., ton price no longe quoted. **Only 1 plant producing, quotes on warehouse delivery, previous quote were truck delv. * F.o.b. Stockton.

PAINT, ROOFING—F.O.B. CARLOAD LOTS

	RED LEAD	WHITE LEAD	READY-MIXED PAINT				ROOFING SUPPLIES Carload lots f.o.b. factory				
	Per 100 lb. in 600-lb. (Approx.) bbl. Dry *a*	Per 100 lb. in 100 lb. cases in oil *w*	Per gal., drums Graphite *b*	Aluminum *c*	Ferric Oxide *d*		Rolls, slate surfaced, 85–90 lb. per sq	Asphalt felt, per 100 lb.	Tar felt, per 100 lb.	Asphalt coating per gal.	Tar pitch 360 lb. bbl. per ton
Atlanta	$20.75	$31.025	$1.75	$2.70	$1.65		$2.06	$2.06‡	$2.06‡	$1.00‡	$36.00‡
Baltimore	20.50	30.65	2.65	4.10	3.22		2.50	4.17	4.17	.42	37.00
Birmingham	20.75	31.025	3.90	3.40	.....		2.80	2.75	2.75	.....	40.50*ee*
Boston	20.50	30.65	.....	.....	.....		2.89*q*	2.79*o*	2.79*o*	.47	42.00
Chicago	20.50	30.65	.....	.....	.....		2.73‡*u*	3.04‡*o*	3.04‡*o*	38.00‡*bbr*	43.00‡
Cincinnati	20.50	30.65	.....	.....	.....		2.50	2.50	2.50	.42*y*	42.36
Cleveland	20.50	30.65	3.10*pqqA*	3.37*qqB*	3.10*C*		2.50*q*	2.50*o*	2.50*o*	.36*ff*	40.00*kk*
Dallas	20.75	31.40	.....	4.05	.....		3.50*q*	3.75*o*	4.35*o*	.36	46.00
Denver	21.00	31.15	2.96	4.50	2.86		3.25*o*	2.76*o*	2.76*o*	.47*ff*	42.00
Detroit	20.50	30.65	2.35	3.30	2.50		2.50	2.50*f*	2.50	.51	40.00
Kansas City	20.50	30.77	.....	2.71	2.65		2.39	2.43*o*	2.43*o*	.313	48.00
Los Angeles	20.50	30.90	3.30	4.50	4.20		2.97	2.01*e*	*l*	.44	*l*
Minneapolis	20.50	28.55 30.77	.....	.....	.....		2.50*kdd*	2.50*kdd*	2.50*kdd*	.34*dd*	37.00*r*
Montreal	.....	29.70	3.75*t*	4.20*t*	4.62*t*		3.50*t*	3.25*tf*	3.25*tf*	1.10*t*	2.90*kt*
New York	20.50	30.65	3.45*y*	.....	.....		2.50	2.50*o*	2.50*o*	.34*z*	37.00
Philadelphia	20.50	30.65	3.25	3.65	3.15		2.54	2.94	2.94	.37	26.00
Pittsburgh	20.50	30.65	2.45	2.55	2.20		2.90	2.90*o*	2.90*o*	.39	42.00
St. Louis	20.50	30.65	.....	.....	.....		2.50	2.50*h*	2.50*h*	.31*y*	38.00
San Francisco	20.50	30.90	2.40	3.40	1.35		2.61	3.56*aa*	.....	.41	.....
Seattle	20.50	31.15	2.51*m*	2.67*m*	.....		3.58*mqq*	3.05*hmcc*	.....	.59*mcc*	52.00*jmcc*

‡ Delivered. Note: Red lead in oil 50c higher than white lead in oil. *a* Red lead prices change frequently due to pig lead price changes. *b* U. S. War Dept. Spec. 3-49A. *c* ASTM Spec. D266-31. *d* 80% minimum ferric oxide. *e* 15 lb. *f* Per 432 sq. ft. *h* Per roll, 65 lb. *i* Net carload lot prices: Minneapolis and vicinity. *j* Asphalt pitch. *k* Per cwt. *l* Not used. *m* 1% discount for cash. *o* Per 60 lb. *p* 6 drums. *q* Per 90 lb. roll. *r* F.o.b. factory Chicago. *s* ASTM Spec. D266-41. *t* Federal tax included. *u* Per 90 lb. square. *v* Per ton. *w* Price to large paint contractors is $1.25 less. *x* Mineral surfaced. *y* 55-gallon container. *z* Drums. *aa* Approximate cost per 100 lbs. *bb* Roofers coating and cement. Price per ton. *cc* LCL truck delivery. *dd* 2% cash discount. *ee* Asphalt, in 100 lb. package. *ff* 5-gal drums. *gg* F.o.b. factory. *hh* Incl. freight. *A.* TTTP 27. *B.* TTA 468A. *C.* TTP 31A.

SKILLED AND COMMON WAGE RATES—PER HOUR

	Brick-layers	Car-penters	Struct. Iron Workers	Hoisting Engineers	Plas-terers	Electrical Workers	Steam-fitters	Common Labor— Building	Common Labor— Heavy Const.
Atlanta	$2.50	$2.00	$2.25	$2.25	$2.50	$2.50	$2.35	$1.05	$1.05
Baltimore	3.00	2.35	2.80	2.60 2.80	2.75	2.75	2.50	1.38	1.38
Birmingham	2.75	2.125	2.35	1.975	2.30	2.50	2.50	1.10	1.20
Boston	2.85‡	2.475	2.70	2.80	2.85	2.75	2.695	1.815	1.815
Chicago	2.625*d*	2.55	2.60	2.50	2.81*n*	2.91*n*	2.60	1.90*m*	1.90*m*
Cincinnati	2.70	2.325	2.50	1.675 2.675	2.50	2.70	2.55	1.65	1.65
Cleveland	2.70*i*	2.25*e*	2.825	2.525	2.825	2.825	2.525	2.10	1.85
Dallas	3.125†	2.25	2.50	2.25	3.125†	2.50	2.375	1.20	1.35
Denver	3.00	2.35	2.30	2.35	3.00	2.65	2.65	1.50	1.50
Detroit	2.85	2.60	2.85*m*	2.80	2.964*l*	2.85	2.75*m*	1.90	1.90
Kansas City	2.675	2.225	2.375	2.225 2.45	2.825	2.425	2.625	1.65	1.65
Los Angeles	2.75	2.35	2.50	2.30	3.125	2.625	2.625	1.75	1.75
Minneapolis	2.40	2.12	2.275	2.07	2.50	2.56*n*	2.435	1.67	1.67
New Orleans	2.60	1.875	2.35	2.225	2.275	2.40	2.35	1.10	1.10
New York	3.548*r*	3.096*o*	3.348*o*	3.348*o*	3.599*ar*	3.456*as*	3.286*p*	1.90	1.90
Philadelphia	3.31*r*	2.525	2.89*j*	2.65	3.675*k*	3.03*r* 3.283*u*	2.8256*t*	1.475	1.775
Pittsburgh	3.00	2.65	2.80	2.80	2.625	2.625	2.80	1.60	1.60
St. Louis	3.09*r*	2.70*h*	2.50	2.55	2.875	2.6775*e*	2.625	1.65	1.65 1.80
San Francisco	3.25*h*	2.375	2.575	2.19	3.00	2.75	2.625	1.65	1.65
Seattle	3.25	2.30	2.50	2.45	3.00	2.65	2.75	1.90	1.95
Montreal*	1.60	1.40	1.50	1.30	1.60	1.50	1.55	1.00	.85

a 6 hr. day. *b* 7 hr. day. *c* Incl. 3% vacation stamp fund for bricklayers; 2% for electricians. * Cost of living bonus now included in basic wage. *e* Includes 5¢ per hr. tool replacement. † Plus $5.00 daily bonus. *h* $2.37 homes and housing. *i* 5¢ vacation fund. *j* Incl. 2% welfare. *l* Incl. 9¢ hr. welfare. *m* Incl 7½ ¢ hr. welfare fund. *l* Incl. 4% vacation fund. *m* Incl. 5¢ hr. welfare ins. fund. *n* Incl. 6¢ hr. welfare fund. *o* Incl. 3% welfare fund. *p* Incl. 3% welfare fund and 3% pension fund. *r* Incl. 3% welfare fund and 20¢ pension fund. *s* Incl. 4% welfare and pension fund and 4% vacation fund. *u* Incl. 1% welfare fund. *t* Still negotiating.

MEXICO CITY PRICES

In Pesos, F.o.b. City		Mar.'51	Apr.'51
Common Wages—Building			
(8 hr. day)	av. per hr.	.72*	.68*
Common Wages—Heavy			
Const. (8 hr. day)	av. per hr.	.88*	.75*
Skilled Labor Wages			
Carpenters (8 hr. day)	av. per hr.	2.19*	1.88*
Bricklayers (8 hr. day)	av. per hr.	2.19*	1.88*
Struct. Iron Workers (8 hr. day)	av. per hr.	1.05*	1.05*
Struct. Steel Shapes			
3"-15" x 12 meters	per metric ton	1,073.30	1,073.30
Reinf. Steel, Corr. Rods			
¼" x 11 meters	per ton	1,218.30	1,218.30
⅜" x 11 meters	per ton	1,208.30	1,208.30
½" x 11 meters	per ton	1,198.30	1,198.30
⅝" x 11 meters	per ton	1,188.30	1,188.30
¾" x 11 meters	per ton	1,188.30	1,188.30
1" x 11 meters	per ton	1,188.30	1,188.30
Gravel truck load of 3½ cu. meters			
Blue Gravel	per tr. load	36.00	42.00
Rose Gravel	per tr. load	34.00	38.00
Cement, Std. Port. (Tolteca)	per ton	125.00	130.00
Lumber			
Mex. Sacred Fir (Oyamel)	per M ft.	800.00	850.00
1st Class Pine	per M ft.	1050.00	1300.00
2nd Class Pine	per M ft.	950.00	950.00

* Increase by 1/6th—work 6 days, paid for 7 days.

ENR Skilled Average: (Bricklayers, Carpenters, Ironworkers), $2.629. **ENR Common Average:** $1.608.

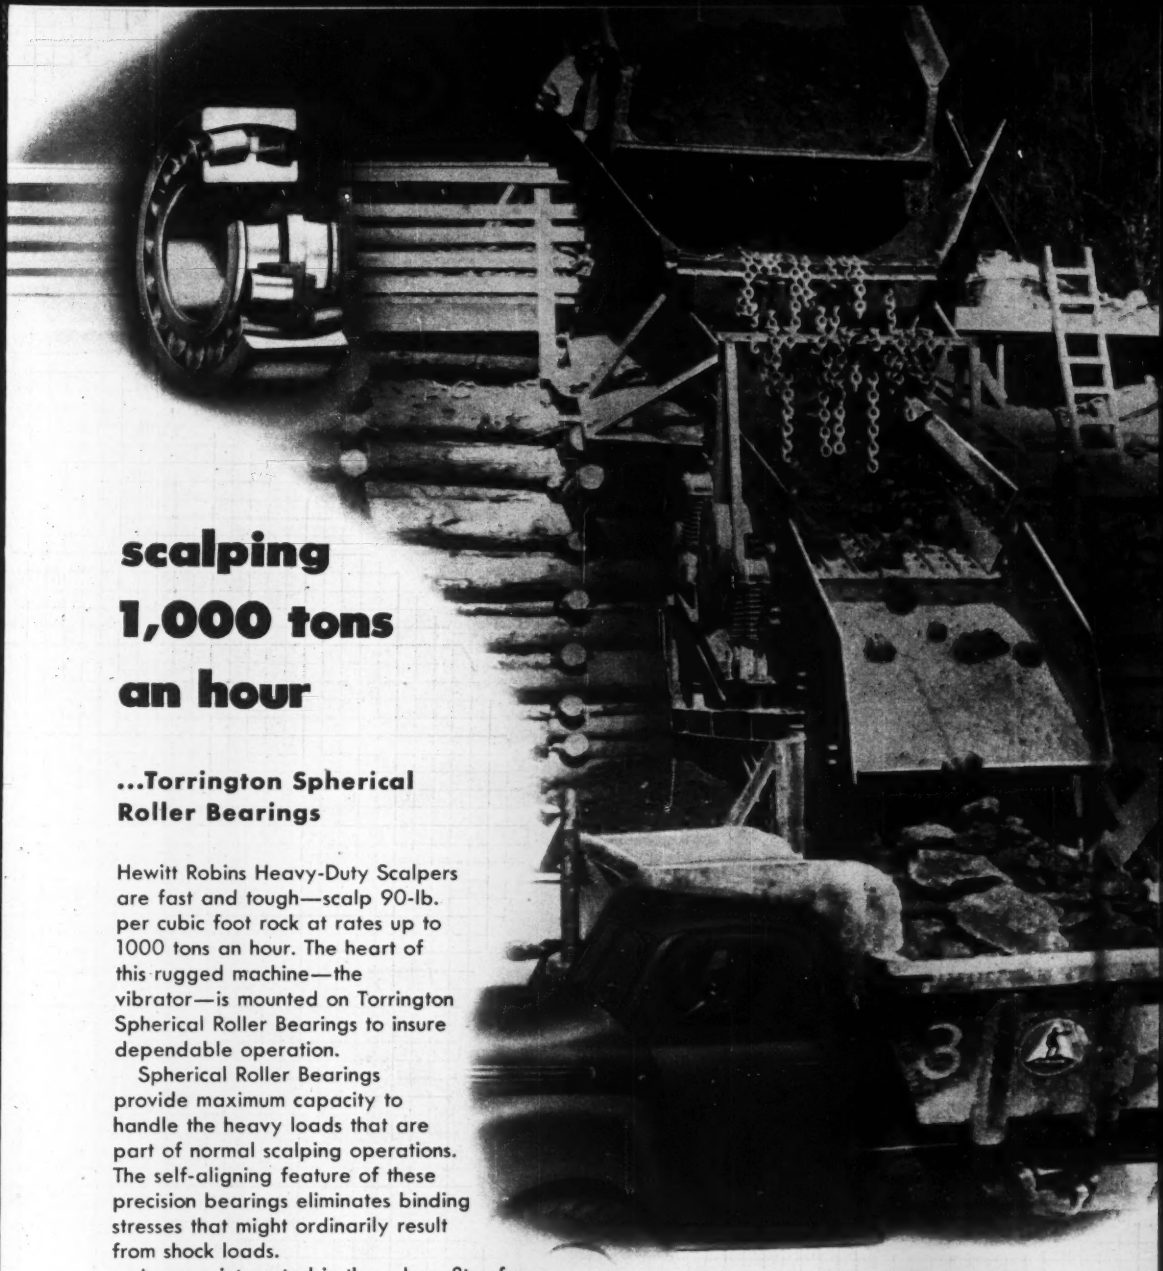

scalping 1,000 tons an hour

...Torrington Spherical Roller Bearings

Hewitt Robins Heavy-Duty Scalpers are fast and tough—scalp 90-lb. per cubic foot rock at rates up to 1000 tons an hour. The heart of this rugged machine—the vibrator—is mounted on Torrington Spherical Roller Bearings to insure dependable operation.

Spherical Roller Bearings provide maximum capacity to handle the heavy loads that are part of normal scalping operations. The self-aligning feature of these precision bearings eliminates binding stresses that might ordinarily result from shock loads.

Are you interested in these benefits of high production and trouble-free operation? Then ask us more about Torrington Spherical Roller Bearings for your own equipment.

THE TORRINGTON COMPANY
South Bend 21, Ind. • Torrington, Conn.
District Offices and Distributors in Principal Cities of United States and Canada

TORRINGTON *SPHERICAL ROLLER* **BEARINGS**

SPHERICAL ROLLER • TAPERED ROLLER • STRAIGHT ROLLER • NEEDLE • BALL • NEEDLE ROLLERS

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

ELSIE EAVES, Manager — *J. A. MAHONEY, Reports* — *M. R. ROESSLER, Statistics*

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION

† Mass., Hingham—SPRINKLER SYS.—B.A. 5/14—Dist. Pub. Wks. Office, First Naval Dist., 495 Summer St., Boston, replacement of sprinkler sys. Bldg. 10 and 13 Naval Industrial Reserve Shipyard, NOY 24836, Spec. 26962. Plans deposit $10. CD 4/6, under Public Bldgs.

BIDS ASKED—BUILDINGS

▲ Conn., Berlin—SCHOOL—B.A. 5/17—Town Bldg. Comm., City Hall, high school, $1,300,000. CD 7/22/49, under LB.

▲ Mass., Boston—HOUSING—B.A. 5/18—City of Boston Housing Auth., 230 Congress St., 200 units housing Proj. PHA 2-11, Tremont and Whittier Sts., Roxbury. CD 8/12/49.

SOON LETS CONTRACT—BUILDINGS

Mass., Boston—APARTMENT—Owner, c/o H. L. Feer and Wm. E. Nast, archts., 27 School St., soon lets contract, 4 story, brick apartment bldg., 839 Beacon St., $500,000.

LOW BIDDERS—HEAVY CONSTRUCTION

▲† Davidson Constr. Co., 1306 Main St., Manchester, N. H., Low Bidder, $3,000,000. fire and crash station, 2 warehouses, refrigeration bldg., service shops, hangar, bakery, spur track, site imprvs. at Limestone Air Force Base, LIMESTONE, ME. U. S. Eng., P. O. Box 2316, Boston 7, Mass. CD 11/17.

▲ Commonwealth of Mass., Dpt. Pub. Wks., 100 Nashua St., Boston, Mass. rejected bids Apr. 10, superstructure of multi-span steel truss bridge over Merrimac River, Contr. UI 62 (8). Contr. A. Amesbury and Newburyport, MASSACHUSETTS. L. B. $2,795,639. CD 4/16, under LB. Will readvertise.

Bagley Mucci, Inc., 6 Dexter St., Medford, Mass., Low Bidder, $357,357. elementary SCHOOL, Fenno St., QUINCY, MASS. City, supt. Schools, 52 Coddington St., Quincy, Mass. Bids Apr. 20. CD 4/9.

CONTRACTS—BUILDINGS

▲ A. E. Stephens Co., 1200 Main St., Springfield, Mass., Contract Awarded, $1,937,900, HIGH SCHOOL Saye Park Capen St., WINDSOR, CONN. Town, town. mgr., Town Hall, Windsor, Conn. Bids Mar. 27. CD 4/6, under LB.

▲ Arthur G. Woods Enterprises, 32 Maple Ave., Windsor, Conn., Owner Builds, $1,150,000, 92 frame RESIDENCES, Woody Brook off Windsor Ave., WINDSOR, CONN.

MIDDLE ATLANTIC

BIDS ASKED—BUILDINGS

† Md., Bethesda—BOILER PLANT—B.A. 5/22—General Services Admin., Pub. Bldgs. Service, 19 and F Sts., N.W., Wash., D. C., tunnel piping etc at boiler plant and incinerator bldg. at National Institutes of Health. Proj. 18-065. Plans deposit $5. CD 5/27/48, adv. ENR 5/10.

LOW BIDDERS—HEAVY CONSTRUCTION

† Potter-DeWitt Corp., Pavilion, N. Y. Low Bidder, $155,350, channel restoration Canisteo River and Canacadea Creek. Serial No. CIVENG 18-020-51-19 ***A. G. Hack & Sons, Bloomsburg, Pa., $95,200, Chauncey Run Channel imprvs., Serial No. CIVENG 18-020-51-20. $40,907, wall rehabilitation, Canacadea Creek and Chauncey Run. Serial No. CIVENG 18-020-51-21, all foregoing at Hornell, NEW YORK. U. S. Eng., 24 St. and Maryland Ave., P. O. Box 1715, Baltimore 3, Md. Bids Apr. 12. CD 4/9.

A. H. Lupton, Jr., Inc., Florida Ave., Bridgeton, N. J., Low Bidder, $104,737, sewage treatment plant imprvs., BRIDGETON, N. J. City, Bridgeton, N. J. Bids Apr. 16.

Eastern Engineering Co., 4 N. Carolina Ave., Atlantic City, N. J. Low Bidder, $115,920, hydraulic dredging, Torresdale Filter plant sedimentation basin, PHILA., PA. Dpt. Pub. Wks., City Hall Annex, Phila., Pa., Elbert J. Taylor, Water Bureau chief. CD 10/30/44.

LOW BIDDERS—BUILDINGS

John D. Lawrence, 343 Hazel Ave., Westville, N. J., Low Bidder, $525,000, elementary SCHOOL, LAUREL SPRINGS, N. J. Roman Catholic Diocese of Camden, 731 Cooper St., Camden, N. J. Bids Apr. 16. CD 4/10.

▲ Leimbach Constr. Co., 3906 Hickory Ave., Baltimore, Md., Low Bidder, $1,696,350. est., $1,500,000. 2 story, part basmt., 92x92 ft., 112x120 ft. and 64x119 ft. east wing, 74x512 west wing, brick, block, steel, North Point High SCHOOL, on 20 acre Wise and Merritt Aves., TOWSON, MD., Baltimore Co., Bd. Educ., Aigburth Rd., Towson, Md. Bids Apr. 24. CD 4/5.

Distr. Comrs., District Bldg., Wash., D. C., rejected bids Mar. 22, Adelaide Davis SCHOOL ADDN., 44 Place and H Sts., N.E., L. B. $456,248, WASH., D. C. CD 3/26 under LB.

CONTRACTS—BUILDINGS

▲ MacDonald Engineering Co., 188 W. Randolph St., Chicago 1, Ill., design and construct. Approx. $3,000,000. cement PLANT, JAMESVILLE, N. Y. Alpha Portland Cement Co., Easton, Pa. CD 4/19.

† James King & Son, Inc., 350 Fifth Ave., New York, N. Y. Contract Awarded, $327,200. alterations to U. S. Marine HOSPITAL, STAPLETON, N. Y. Pub. Bldgs. Service, General Services Admin. Bldg., Wash. 25, D. C. Awarded Apr. 9. CD 10/5/45

Jack Shelby, Atlantic City, N. J., Contract Awarded, $700,000, RESIDENTIAL DEVELOPMENT, Fife Rd., EGG HARBOR, N. J. Sun Realty Co., 1201 Atlantic Ave., Atlantic City, N. J. R. Bayne Williams, 8003 Ventnor Ave., Atlantic City, archt.

B. F. Parrott & Co. Inc., Boxley Bldg., Roanoke, Va., Contract Awarded, Approx. $300,000, 1 story 128x196 ft., approx. 30,000 sq. ft., brick, steel DYE HOUSE addn., and Dryer Bldg., GLASGOW, N. J. James Lies & Sons Co., Bridgeport, Pa.; United Engineers & Constructors Inc., 1401 Arch St., Phila., Pa., archts and engrs.

Clinton Developers, Clinton Ave., Trenton, N. J., Separate Contracts, $300,000, RESIDENTIAL DEVELOPMENT, S. Clinton Ave., TRENTON, N. J. Dante D'Anastasio, 815 Federal St., Camden, archt.

Frank Adamucci, 2151 N. Wilson Ave., Margate, N. J., Separate Contracts, $300,000, RESIDENTIAL DEVELOPMENT, Crystal Terrace, WESTMONT, N. J.

D. T. Riffle, Inc., 1006 Forbes St., Pittsburgh, Pa., Contract Awarded, Approx. $100,000, 1 and 2 story 20x30 ft. and 30x101 ft. tile yard office, SERVICE Bldg., oil compressor bldg., interlocking tower, PITTSBURGH, PA. Pennsylvania R.R., J. L. Gressitt, ch. engr., Broad St. Station Bldg., 1617 Pennsylvania Blvd., Phila., Pa. Ingham, Boyd & Pratt, 1211 Empire Bldg., Pittsburgh, Pa., archts.

W. F. Wilson, Brookville, Md. Contract Awarded, $81,173. Contr. 922 W&S approx. 14,205 ft. ¾ to 12 in. water mains, 12,205 ft. 6 and 8 in. plain concrete or vitr. sewers, 1,235 ft. 6 in. sewer house connections in Connecticut Ave. Estates, HYATTSVILLE, MD. Washington Suburban Sanitary Comn., Hamilton St., Hyattsville, Md. Bids Apr. 23. Awarded Apr. 24. CD 4/19.

SOUTH

BIDS ASKED—BUILDINGS

Ky., Louisville—HOSPITAL—B.A. About 5/20—Kentucky Baptist Hospital, 810 Barrett St., 60-bed hospital wing and student nurses home, $800,000.

Miss., Biloxi—HOUSING—B.A. 5/22—Biloxi Housing Auth., 120 units housing Proj. Miss. 5-4, $750,000. Matthes & Landry, 214 W. Pine St., Hattiesburg, archts. CD 12/2/49.

Miss., Jackson—MUNICIPAL COURT—B.A. 5/22—City, municipal court-jail bldg., $700,000. James T. Canizaro, Deposit Guaranty Bldg., archt. CD 1/4.

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada, are of these minimum sizes or larger: water supply, earthwork, waterways $34,000; other public works $60,000; industrial buildings $82,000; other buildings $300,000.

Classes of Construction

(Name in order of Listing)

Water Supply	Latin America
Sewers, Waste Disposal	Public Buildings
Bridges	Commercial Buildings
Streets & Roads	Industrial Buildings
Earthwork, Waterways	Unclassified

Stages Reported

PROPOSED WORK: Including appointment of engineers or architects.

BIDS ASKED (new announcements only). For full calendar, see also preceding issues of ENR.

LOW BIDDERS: On jobs below $500,000 value all low bidder news will be the final reports published on the projects involved except where award is not made to the low bidder. In this case, a supplementary contract award report will be published.

CONTRACTS AWARDED: Except awards to low bidders previously reported in low bidder stage.

Dates shown are of issue in which last previous report was published.

Symbols and Abbreviations Include:

†	Federal Government
▲	Project of $1,000,000 or over.
B.A	Bids Asked
ENR	Engineering News-Record
CD	Engineering News-Record Construction Daily

▲ Tenn., Memphis—HOUSING—B.A. 5/23—Pub. Wks. Office, Sixth Naval Dist., Naval Base, S. C., construct, manage, finance, 540 military HOUSING unit project at Naval Air Station, $4,136,675. CD 3/20.

▲ Ala., Athens—HOUSING—B.A. 7/12—Athens Housing Auth., Athens, 100 housing units, $1,000,000. CD 12/7/49.

SOON LETS CONTRACT—HEAVY CONSTRUCTION

Mississippi—RURAL DISTRIBUTION LINES—Alcorn County Electric Power Assn., Corinth, soon lets contract, 178.3 mi. rural distr. lines, Alcorn Co., Alfen & Hoshall, 65 McCall Place, Memphis, Tenn., engrs.

LOW BIDDERS—HEAVY CONSTRUCTION

† E. C. Ernst, Inc., 1622 14 St., N. W. Wash., D. C. Low Bidder, $74,850, installing fire alarm system at the Marine Corps Schools, QUANTICO, VA. Pub. Wks. Office, Potomac River Naval Command, Naval Gun Factory, Wash., D. C. CD 1/29.

E. H. Hines Constr. Co., Box 924, Greenwood, S. C. Low Bidder, $66,258. est. $50,000-$75,000, structures on 8.37 mi. N. C. 10 and 27, Proj. 8255, S-617 (1), Cleveland Co.***T. F. Houser, Box 5178, Asheville, N. C. $96,474. structures on 6.56 mi. Proj. No. 9443, F-16 (8), Haywood Co.***Harvey H. Stewart, Box 1932, Charlotte, N. C., $418,489. est. $300,000-$400,000. structures U. S. 29, 52 and 70, Proj. 6733, Rowan and Davidson Counties.

J. C. Edwards, Box 197, Orangeburg, S. C. $78,400. est. $50,000-$75,000, structures U. S. 19 and 23, Proj. No. 9086, U-661 (5), Buncombe Co.***received no bids Apr. 24, structures U.S. 258, Proj. 2291, Greene and Pitt Counties, NORTH CAROLINA. State Hy., and Pub. Wks. Comm., Charlotte, N. C. Bids Apr. 24. CD 4/16.

▲ Kiker & Yount, Inc., Box 330, Reidsville, N. C. Low Bidder, $147,014. est. $150,000-$175,000. traffic bound macad. b. conc. binder and surf. 2.86 mi. U.S. 220, Proj. No. 5900, F-6-25 (7), Rockingham and Guilford Counties***Brown Paving Co., Box 484, Lexington, N. C., $185,709. est. $175,000-$200,000. sand asph. base and surf. course 13.9 mi. Proj. 1-9-10-203, 1-9-10-206, 1-9-10-207, Martin Co.; $100,715. est. $100,000-$125,000. sand asph. or b. conc. surf. and binder 19 mi., U. S. 158 Proj. No. BS 4-6-41-116, 4-9-41-209, 4-9-41-210, 4-9-35-207, Vance and Franklin Counties***Dickerson, Inc., Box 448, Monroe, N. C., $161,316. est. $125,000-$150,000. bit. surf. tr. or sand asph. or b. conc. surf. 46.3 mi. proj. 6-9-55-217, Moore Co.; $98,725. est. $75,000-$100,000. sand asph. or b. conc. surf. course 16.4 mi. Proj. No. 2-9-15-210, 2-9-15-219, Beaufort Co.; $118,301. est. $100,000-$125,000. bit. surf. tr. or sand asph. or b. conc. surf. 30.89 mi. Proj. No. S-5-46-212, Guilford Co.; $155,516. est. $125,000-$150,000. bit. surf. tr. or sand asph. or b. conc. surf. 43.3 mi. Proj. No. 6-9-50-215, Chatham Co.; $84,382. est. $75,000-$100,000 bit. surf. tr. b. conc. or b. conc. surf. 21.1 mi. Proj., 9-9-79-208, 9-9-79-215, Catawba Co.; $76,878. est. $50,000-$75,000. bit. surf. tr. or sand asph. or b. conc. surf. course 21 mi. Proj. 6-9-52-215, Harnett Co.

Lavender Bros., Earl, N. C. $125,138. est. $125,000-$150,000. STBC. bit. surf. tr. or b. conc. 8.37 mi. N. C. 10 and 27, Proj. 8255, S-617 (1), Cleveland Co.***Yeager-Cline Constr. Co., Box 486, Fayetteville, N. C., $67,554. est. $50,000-$75,000. sand asph. or b. conc. surf. course 14.7 mi. Proj. 6-9-53-213, Hoke Co.***Shepherd Constr. Co. Inc., Box 3299, Station F, Atlanta, Ga., $112,874. est. $75,000-$100,000. sand asph. or b. conc. surf. 25.9 mi. Proj. 6-9-57-232, 6-9-58-215, Robeson and Scotland Counties.

E. H. Hines Constr. Co., Box 924, Greenwood, S. C., $98,788. est. $75,000-$100,000. bit. surf. tr. or b. conc. surf. 25.8 mi. Proj. 9-91-81-211, 9-91-81-216, Code 5900-913, 9-9-83-208, Gaston and Lincoln Counties***A. R. Thompson, Constractor, Inc., Rutherfordton, N. C., $99,189. est. $100,000-$125,000. STBC. bit. surf. tr. or b. conc. surf. 9.7 mi. Proj. 9-986-213, Rutherford Co.*** Asheville Paving Co., Box 7068, Asheville, N. C., $99,171. b. conc. binder and surf. course 9.4 mi. U. S. 19 and 19E Proj. No. BS 10-6-100-126, Yancey Co.***Barrus Constr. Co., Box 561, Kinston, N. C., $69,067. est. $50,000-$75,000. sand asph. or b. conc. surf. course 9.4 mi. Proj. 2-9-21-211, 2-9-18-217, Lenoir and Greene Counties.

White Constr. Co., Kinston, N. C., $73,675. est. $50,000-$75,000. sand asph. or b. conc. surf. course 10.3 mi. Proj. No. 2-9-24-216, Pitt Co.; $63,839. est. $50,000-$75,000. sand asph. or b. conc. surf. course 9.8 mi. Proj. 2-9-24-212, 2-9-24-241, Pitt Co.***Thompson-Arthur Constr. Co., Box 1197, Greensboro, N. C., $84,048. est. $50,000-$75,000. traffic bound macad. and b. conc. binder and surf. 0.82 mi. N. C. 87, Proj. No. BS 5-6-49-188, Rockingham Co.***F. D. Cline Constr. Co., Box 349, Raleigh, N. C., $73,273. est. $50,000-$75,000. sand asph. or b. conc. surf. course 14.8 mi. Proj. 6-9-52-214, Harnett Co.

Propst Constr. Co., Box 526, Concord, N. C., $100,474. est. $75,000-$100,000. bit. surf. tr. or sand asph. or b. conc. surf. 21.6 mi. Proj. No. 6-9-51-216, Davidson Co.***Taylor Constr. Co., Box 5119, Ashe-

ville, N. C., $335,906 grading 6.56 mi. Proj. No. 9443, F-16 (8), Haywood Co. NORTH CAROLINA, State Hy. and Pub. Wks. Comn., Raleigh, N. C. Bids Apr. 24. CD 4/16, 4/18.

F. A. Triplett, Inc., Chester, S. C., Low Bidder, $60,267, construct 331 ft. rein.-con., structural steel and creosoted timber bridge over Rocky Creek near Rossville, Route 901, S. C. Docket No. 12.286, FAP NO. S-239 (2), Chester Co.***rejected bids Apr. 17, construction of 230 ft. rein.-con. bridge over Hard Labor Creek with 0.514 mi. of earth graded and bit. surfaced approaches; 210 ft. rein.-con. bridge over Cuffeytown Creek with detour road and detour bridge near McCormick, Route 43, S. C. Docket No. 13.251, FAP No. F-288 (2), McCormick Co., L. B. $107,638***received no bids Apr. 17, construction of 0.904 mi. of embankment on the approaches to the proposed Ashley River bridge between North Charleston and U. S. Route 17, S. C. Docket No. 10.325.1 FAP No. F-2571, Charleston Co. SOUTH CAROLINA, State Hy. Dpt., Columbia, S. C. Bids Apr. 17. CD 4/12.

State Hy. Dpt., Columbia, S. C., rejected bids Apr. 17, bit. retreatment (Class A) and hot laid b. conc. surf. course resurf. 17.5 mi. U. S. Route 29 from Gantt to point approx. 5 mi. south of Williamston and 6.4 mi. State Route 20 from Williamston to Belton; hot laid b. conc. resurf. 0.8 mi. Road 13 and 0.6 mi. Road No. 76, S. C. Dockets Nos. 4.1053 and 23.1067 Anderson and Greenville Counties***bit. retreatment (Class A) resurf. 4.54 mi. and hot laid b. conc. surf. course 8.6 mi. U. S. Route 301 from intersection at Pee Dee Station to point 1.5 mi. north of Dillon county line, S. C. Dockets Nos. 17.1008 and 34.1010, Dillon and Marion Counties*** bit. retreatment (Class A) resurf. 5 mi. and hot laid b. conc. surf. course 14.2 mi. U. S. Route 78 between Four Hole Swamp and Summerville and 0.5 mi. U. S. Route 178 at Walnut Swamp, S. C. Dockets Nos. 18.1012 and 18.1013, Dorchester Co. L. B. $132,483.

bit. retreatment (Class A) resurf. on shoulders and hot laid b. conc. surf. course resurf. 15.3 mi. U. S. Route 178 from Saluda to Batesburg, S. C. Docket No. 41.1013 Saluda Co. L. B. $76,318***grading, bit. surf. and construction of concrete curb and gutter and sidewalk 0.306 mi. Road 105, being Mill and Brook Sts. at Abbeville Mill in Abbeville; grading bit. surf. 0.816 mi. Road 126 from Chestnut St. to Road 133 in Abbeville, 0.647 mi. Road 128 from Route 72 to Road 33 in Abbeville and 2.091 mi. Roads 52 and 120 from end of pavement in Abbeville easterly and southerly to a county road, S. C. Dockets Nos. 1.251 and 1.269 Parts 1, 2, 3, and 4, Abbeville Co. L. B. $123,292.

grading; bit. surf. construct concrete curb and gutter and sidewalks 0.748 mi. U. S. Route 25 and State route 123 from Cedar St. in Edgefield to the northeastern city limit grading, bit. surf. 1.405 mi. Roads 44, 78, 87 and 89 being streets in Edgefield and 0.458 mi. Roads 66 and 109 being streets in Trenton and 0.15 mi. Road 122 being drives at Ebenezer Church near Trenton, S. C. Dockets Nos. 19.267, Parts 1 and 2, 19.269, 19.272 Parts 1, 2, 3, and 4, and 19.274, FAP Nos. F-240 (5) and F-184 (2), Edgefield Co. L. B. $119,424. SOUTH CAROLINA, CD 4/12.

Rust Eng. Co., Exchange Bldg., Birmingham, Ala., Low Bidder, $814,900, Bessemer Sewage Treatment Plant, BIRMINGHAM, ALA. Jefferson Co., Court House, Birmingham, Ala. Bids Apr. 24. CD 3/28.

Baird & Latimer, Box 56, Selma, Ala., Low Bidder $144,211, bridge and approaches 1,252 mi. between Mowco and Mt. Vernon, F-81 (2), Mobile Co.; $64,273 bridge and approaches 0.738 mi. on U. S. 82 near Gordo F-127 (7), Pickens Co.***G. W. Norrell Contg. Co., Georgiana, Ala., bridge 0.059 mi. over Locust Fork of Arrior River between Brooksville and Ala. 32, FA-S-399 (4), Blount Co. $124,468 mi. substructures 0.13 mi. of bridge over Warrior River on Coaldale-Trafford Rd. F-AS-S-488 (1), Proposed A. Jefferson Co.***Carlton Contg. Co., Box 731, Albany, Ga., $65,871, bridge widn. 0.024 mi. on Boza-Guntersville Road, F-88 (5), Four Lane Section Marshall Co. ALABAMA State Hy. Dpt., Montgomery, Ala., Bids Apr. 20. CD 4/12 and 4/20.

Clyde O. Mitchell, 104 N. 44 St., Birmingham, Ala., Low Bidder, $100,903, base and bit. 11.089 mi. Co. Rds. from Eutaw west toward Mt. Hebron and between Boligee and Tishabee, SACP-365-B and 387-A, Greene Co.; $165,299, bit. and bridges 8.687 mi. from U. S. 82 (near Coal Fire) north and west toward Liberty High School, FA-S-492 (1), Pickens Co.; **Blount Bros. Constr. Co.**, Box 1144, Montgomery Ala., $99,696, base and bit. 16.899 mi. from Blues Old Stand to Smuteye from Midway to Pine Grove and from Blues Old Stand to Pike Co. Line, SACP-769-D, 7145-A and 7147-A, Bullock Co. ALABAMA State Hy. Dpt., Montgomery, Ala. Bids Apr. 20. CD 4/12.

LOW BIDDERS—BUILDINGS

▲ **J. A. Jones Constr. Co.**, 133 Ellis St. N. E., Atlanta, Ga., Low Bidder, $1,585,500, LIBRARY at Georgia School of Technology, ATLANTA, GA. Bd. Regents, University System of Georgia, 20 Ivy St., S. E., Atlanta, Ga. Bids Apr. 25. CD 4/5.

Jack A. Roberts, 1318 N. 23 St., & The Steel Constr. Co., 720 4 Ave. S., both Birmingham, Ala., Low Bidder, $825,583, 92-unit Cooper Homes HOUSING proj. ANNISTON, ALA. Anniston Housing Auth., Anniston, Ala. Bids Apr. 24. CD 3/28.

CONTRACTS—HEAVY CONSTRUCTION

Joseph W. Barnwell, Jr., Columbia, S. C., Contract awarded, $101,672, construct 270 ft. rein.-con. bridge with 0.427 mi. graded and bit. surfaced approaches over Duncan Creek near Whitmire and widn. double 12x12 ft. culvert at Hunting Fork Creek, U.S. Route 176, widn. triple 7x10 ft. culvert at Kings Creek.

WE RESTORED THIS DAM WITH "GUNITE"

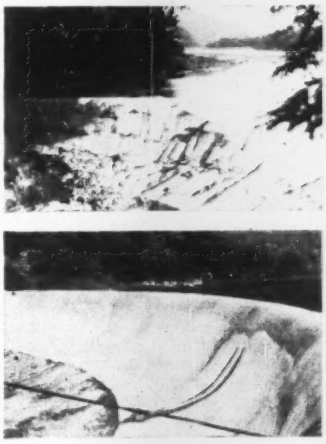

These two photos show a large, circular, gravity dam belonging to a large Eastern power company, and is just one of many that we have repaired with "GUNITE" for this organization.

The Upper View shows the advanced state of disintegration existing before our Contract Department started work on the dam; lower view shows the completed job.

After chipping out the loose and disintegrated concrete and sandblasting the entire area, heavy reinforcing mesh was placed over the surface and two inches of "GUNITE" applied.

This, and scores of similar "GUNITE" jobs we have performed are illustrated and described in Bulletin A2400. Write today, on your letterhead, for a free copy.

CEMENT GUN COMPANY
"GUNITE" CONTRACTORS
GENERAL OFFICES—ALLENTOWN, PENNA. U.S.A.
MANUFACTURERS OF THE CEMENT GUN

HANDLE CONCRETE PIPE FASTER, SAFER, CHEAPER
IN PLANT, YARD, OR PROJECT SITE

In the concrete pipe industry, *KRANE KAR* and *LIFTRUK* are demonstrating their ability to Lift, Transport, Stack, and Load pipe of all diameters more efficiently. Let our sales engineer survey your Materials-Handling Problems. No obligation.

KRANE KAR

Photo Courtesy Richmond Concrete Pipe & Products Co.

The KRANE KAR Swing-Boom Crane handles loads at Either Side as well as at the Front.

LIFTRUK



Photo Courtesy American Concrete Pipe Corp.

KRANE KAR Swing-Boom Mobile Crane . . . 1½, 2½, 5, and 10 ton cap. Gas or Diesel; Pneumatic or Solid Rubber Tires; 9 to 37 ft. Booms or Adjustable Telescopic Booms; Winches, Buckets, and other accessories available. Ask for Bull. No. 79.

LIFTRUK Heavy-Duty Fork Lift Truck . . . 5, 7½, and 10 ton cap. Crane Boom, Ram, Scoop, Overhead Operator's Guard, and other accessories available. Ask for Bull. No. 77.

SILENT HOIST & CRANE CO., 858 63rd ST., BROOKLYN 20, N.Y.

construction
STEEL
Some products in short supply but we'll do our best to help you
REINFORCING BARS and accessories
STRUCTURALS—channels, angles, beams, etc.
PLATES—sheared and U M., Inland 4-Way Floor Plate
SHEETS—many types & coatings
TUBING—incl. welded structural
EXPANDED METAL—std. & flattened
STEEL SPIRALS, CAISSON RINGS, ETC.
RYERSON
Joseph T. Ryerson & Son, Inc. Plants at: New York, Boston, Philadelphia, Detroit, Cincinnati, Cleveland, Pittsburgh, Buffalo, Chicago, Milwaukee, St. Louis, Los Angeles, San Francisco.

TILLEY
FLOODLIGHT PROJECTOR
Burns 40 hours on 6 pints of Kerosene

This Model F. L. 6 Floodlight is shown complete with short stand—Weighs 27 lbs. Overall height 26 inches.
$65.00
F. O. B.
CHICAGO
- A self-contained unit with no cables—entirely independent of batteries, generators, and the like, which makes it more mobile. Wind and rain proof.
- The TILLEY Floodlight Projector gives a white light of 5000 reflected candle power. It is just the thing for night construction work and for emergencies when power is not available. *For complete details we suggest you write.*

W. W. LEE & SON
20 E. JACKSON BLVD.
CHICAGO 4, ILLINOIS

State Route 19, S. C. Docket No. 36.258, Parts 1, 2, and 3. FAP No. F-324 (2), Newberry Co. SOUTH CAROLINA. State Hy. Dpt., Columbia, Bids Apr. 17. CD 4/12.

▲ J. F. Cleckley & Co., Orangeburg, S. C., Contract awarded, $185,461, hot laid b. conc. surf. course resurf. 38.98 mi. U.S. Route 301 between Savannah River and intersection of State Route 332 near Cope and 29.87 mi. U.S. Route 521 between Olar and North S. C. Dockets Nos. 3.1006, 5.1009, 5.1010, 38.1020 and 38.1021, Allendale, Bamberg, Orangeburg Counties; $104,815, bit. retreatment (Class A) and hot laid b. conc. surf. course resurf. 4 mi. U.S. Route 17 between Parkers Ferry and Jacksonboro, hot laid b. conc. surf. course resurf. 22 mi. U.S. Route 17 between Jacksonboro and Gardens Corner, incl. 7,000 tons hot plant mix sand asph. for building up base, S. C. Dockets Nos. 7.1018, 10.1048 and 15.1014, Beaufort, Charleston and Colleton Counties; $77,168, hot laid b. conc. surf. course resurf. 4 mi. U.S. Route 521 between Camden and DeKalb and 21 mi. State Route 34 between Camden and Bishopville, S. C. Dockets 28.1008, 28.1010 and 31.1011, Kershaw and Lee Counties; $105,389, bit. retreatment (Class A) and hot laid b. conc. surf. course resurf. 8 mi. U.S. Route 76 from intersection of State Route 764 to the Wateree River; hot laid b. conc. surf. course resurf. 10 mi. State Route 763 between Sumter and Wedgefield, 2.1 mi. U.S. Route 15 and 0.94 mi. U.S. Route 521 in Sumter, S. C. Dockets Nos. 40.1026 and 43.1015, Richland and Sumter Counties.

Sloan Constr. Co. Inc., Peoples Natl. Bank Bldg., Greenville, S. C., $151,414, bit. retreatment (Class A) and hot laid b. conc. surf. course resurf. 20.4 mi. U.S. Route 321 between Winnsboro and Chester; bit. retreatment (Class A) resurf. 6 mi. and hot laid b. conc. surf. course resurf. 9 mi. State Route 72 between Chester and York County line, S. C. Dockets Nos. 12.1023 and 20.1013, Chester and Fairfield Counties; $169,852, hot laid b. conc. surf. course resurf. 13.3 mi. U.S. Route 501 between Conway and Myrtle Beach and 35.96 mi. U.S. Route 17 between Sampit River (near Georgetown) and Myrtle Beach, S. C. Dockets Nos. 22.1014, 26.1024 and 26.1025, Georgetown and Horry Counties; $73,668, bituminous retreatment (Class A) and hot laid b. conc. surf. course resurf. 11.3 mi. U.S. Route 52 between Kingstree and Florence county line; hot laid b. conc. surf. course resurf. 0.265 mi. State Routes 527 and 175 in Kingstree, S. C. Dockets Nos. 45.1015 and 45.1016, Williamsburg Co.

Knox Bros. Inc., Thomson, Ga., $132,278, grading, bit. surf. 10.64 mi. Roads 136 and 40 from Route 64 in Cottageville to Route 63 near Jacksonboro and 0.57 mi. Road 137 from Road 136 to Road 40 in Cottageville, S. C. Docket No. 15.276, Parts 1, 2 and 3. FAP No. 9-568 (1), Colleton Co.***Cherokee Inc., Sumter Hy., Columbia, S. C., $246,870, grading, drainage, bit. surf. with concrete curb and gutter and sidewalks 1.496 mi. Route 151 (Carolina Ave.) from Road 37 (6th St.) westerly to Road 10 (home Ave.); grading, bit. surf. 1.329 mi. Road 37 (6th St.) from U.S. Route 15 south of Hartsville to Route 151 (Caroline Ave.) in Hartsville, S. C. Dockets Nos. 16.288.2, Parts 1, 2 and 3 and 16.291.2 Parts 1 and 2, FAP No. F-61 (8). Parts 1, 2, and 3, Darlington Co.***E. H. Hines Constr. Co. Inc., Greenwood, S. C., $263,678, grading, macad. base course, bit. surf. 4.266 mi. U.S. Route 321 (By-Pass) from U.S. Route 321 and State Route 213 south of Winnsboro to U.S. route 321 north of Winnsboro, S. C. Docket No. 20.261. FAP No. F-2576 (1). Fairfield Co.

Carolina Contrg. Co. Inc., 1000 Adeline St., Columbia, S. C. $88,328, grading, bit. surf. 2.573 mi. Road 72 from Road 47 in Scranton northeasterly to a county road, 5.149 mi. Road 85 from Alternate U.S. Route 52 near Lake City easterly to a county road, S. C. Docket No. 21.320 Parts 1, 2 and 3, Florence Co.***B. L. Jones & Co., Winder, Ga., $71,453, grading, bit. surf. 4.75 mi. Road 101 from U.S. Route 276 near Cleveland to the Pickens county line and 0.3 mi. on Road 124 from Road 101 to the Pickens county line, S. D. Docket No. 23.311 Parts 1 and 2, Greenville Co.

Ed. L. Smith, Blaney, S. C., $80,695, grading, bit. surf. 1.462 mi. Road 28 from Route 39 northeasterly to Richland Springs Church and School near Road 27, 1.058 mi. Road 85 from Route 39 southwesterly to a county road, 2.574 mi. Road 25 from Route 23 in Ward northeasterly to county road and 2.525 mi. Roads 125 and 185 from Roads 81 and 146 northerly and easterly to Route 702, S. C. Dockets Nos. 41.254 Parts 1 and 2, 41.255 Parts 1 and 2, 41.273, FAP No. S-564 (1), Saluda Co. Grand total $1,751,069. SOUTH CAROLINA. State Hy. Dpt., Columbia, S. C. Bids Apr. 17. CD 4/12.

CONTRACTS—BUILDINGS

▲ Paul Smith Constr. Co., 3103 N.W. 20 St., Miami, Fla. Contract Awarded, $1,800,000 by Patrick Homes, Inc., (sponsors) construct, manage and finance 180 HOMES, at Patrick Air Force Base, COCOA, FLA., for Dpt. Air Force, Pentagon Bldg., Wash., D. C.

▲ Rust Eng. Co., 575 6 Ave., Pittsburgh, Pa., Contract Awarded, $3,000,000, phosphate chemical PLANT, MULBERRY, FLA. International Minerals & Chemical Co., 20 N. Wacker Dr., Chicago, 6, Ill. CD 3/30, under CA.

Hubert Owen, Jackson, Tenn., Contract awarded. Approx. $300,000. CHURCH, JACKSON, TENN. West Jackson Baptist Church, c/o contractor.

▲ Rock City Constr. Co., 135 Fourth Ave., Nashville, Tenn. Contract awarded. Approx. $1,000,000 3 addnl. BUILDINGS at State School for Blind, NASHVILLE, TENN. State Bd. Educ., War Memorial Bldg., Nashville, Tenn.

▲† C. F. Rule Const. Co., 217 13 Ave. N., Nashville, Tenn. Contract awarded, $1,250 000. STEAM PLANT, TULLAHOMA, TENN. at Arnold Engineering Development Center. U. S. Eng., Tullahoma, Tenn. CD 1/23.

MIDDLE WEST

BIDS ASKED—BUILDINGS

▲ O., Lima—HOSPITAL—B.A. 5/24—Dpt. P. Wks., S. O. Linzell, Dir., Ohio Depts. Bldg., Columbus. 300 bed hospital unit for psychopathic offenders at Lima State Hospital. $1,450,000. Sims, Cornelius & Schooley, 2901 N. High St., Columbus, archts. and engrs., H. G. Allen, cons. archt., Div. of State Arch. and Engr., 705 Ohio Depts Bldg., Columbus, O. CD 10/12/49.

Ill., Midlothian—CONVENT—Bids Asked—St. Christopher Parish, 146 and Keeler Sts., 1 story, bsmnt., 38,000 sq. ft., convent, school and gymnasium. $375,000. Herman J. Gaul & Son, 228 E. Superior St., Chicago, 11, Ill., archts.

Ind., Decatur—CHURCH—Bids Asked—St. Mary's Roman Catholic Church, Rev. Msgr. J. J. Seimetz, Decatur, 2 story, stone, brick, rein.-con., steel church, school and rectory, $400,000. Edw. J. Schulte, 920 E. McMillan St., Cincinnati, O., archt. CD 3/18/48.

▲ Ind., Gary—PLANT—Bids Asked—Taylor Forge & Pipe Co., Dunes Hy., first unit 100x400 ft., pipe works plant on 175 acres. $1,500,000. Shaw, Metz & Dolio, 208 S. LaSalle St., Chicago, 4, Ill., archts. CD 3/27.

LOW BIDDERS—HEAVY CONSTRUCTION

City, Earl Woolsey, mayor, Jerseyville, Ill., cancelled bids to have been opened Apr. 15, WW imprvs. incl. developing 2 shallow wells, rehabilitation spring pumping station, booster station, filter bldg., clarifier and aerator 190,000 gal. reservoir, 53,000 lin. ft. 2- to 6-in. c.i. pipe, etc. JERSEYVILLE, ILL. Project postponed indefinitely. CD 4/9.

LOW BIDDERS—BUILDINGS

▲ J. J. Altman & Co., Spivey Bldg., East St. Louis, Ill. Low Bidder, $2,410,950, general contract, 300-unit brick, concrete asbestos sidings, etc., Roosevelt HOMES incl. community bldg.; John J. Keeley Constr. Co., 2030 State St., East St. Louis, Ill., $855,357 general contract 100-unit, brick, concrete asbestos, sidings, etc., HOUSING and community bldg., Villa Griffin Project; received no bids for 300-unit brick, concrete asbestos siding, etc., John De Shields Housing Proj. incl. community bldg., EAST ST. LOUIS, ILL. St. Clair County Housing Auth., James E. Haynes, exec. dir., 6 St. and Ohio Ave., East St. Louis, Ill. Bids Apr. 23. CD 4/10.

CONTRACTS—HEAVY CONSTRUCTION

Thomas E. Currie Co., 2531 Connor St., Detroit, Mich. Contract Awarded, $128,489, concrete paving, Proj. 1951 P 1, BIRMINGHAM, MICH. City, Donald C. Egbert, city mgr., Birmingham, Mich. Bids Mar. 28. CD 3/23.

CONTRACTS—BUILDINGS

▲ W. E. Cook Constr. Co., Niles Bank Bldg., Niles, O. Contract Awarded. Approx. $3,000,000. 320x1,100 ft. refractories PLANT to make fire brick, containing 3 continuous fire brick kilns, 675 ft. long each, on 29-acre site north of WARREN, O. General Refractories Co., 1520 Locust St., Phila., Pa.

Colpaert Realty Co., Sherland Bldg., South Bend, Ind. Owner Builds, $375,000. 35 RESIDENCES, SOUTH BEND, IND.

B. J. Regnell, 1005 W. Belmont St., Chicago, Ill. Contract Awarded, $100,000, 14,000 sq. ft. FACTORY ADDN., CHICAGO, ILL. Bodine Electric Co., 2650 W. Addison St., Chicago, 18, Ill. Leif Skadberg, 5153 N. Clark St., Chicago, 40, Ill., archts. Awarded Apr. 12.

▲ R. C. Wieboldt Co., 2353, Blue Island Ave., Chicago, 8, Ill. Contract Awarded, $1,000,000, McGaw AUDITORIUM, sports center, EVANSTON, ILL. Northwestern University, 619 Clark St., Evanston, Ill. Awarded Apr. 19. CD 1/17.

J. E. Williams Constr. Co., 6490 Page Ave., St. Louis, 14, Mo., Contract Awarded, $500,954, general contract, 2 story bsmnt., HOSPITAL and 1 story 44x73 ft. wing, MARION, ILL. Marion Memorial Hospital, John E. Giles, pres., Hospital Bd., Marion, Ill. Bids Apr. 18. CD 4/26, under LB.

Fuel Economy Co., New York Bldg., Minneapolis, Minn., Contract Awarded, $950,000, POWER PLANT, MOLINE, ILL. Iowa-Illinois Gas & Electric Co., Moline, Ill. Awarded Apr. 16. CD 3/27.

▲ John Griffiths & Son Co., 228 N. La Salle St., Chicago, 1, Ill., Contract Awarded, $20,000,000. 3d and 4th of 8-digital GENERATING STATION, STICKNEY, ILL. Commonwealth Edison Co., 72 W. Adams St., Chicago, Ill. Naess & Murphy, 80 E. Jackson St., Chicago, 4, archts. Awarded Apr. 17.

J. P. Cullen & Sons, Janesville, Wis., Contract Awarded, $829,850, general contract, 4 story L-shaped, 97x150 ft. state LABORATORY of Hygiene, MADISON, WIS. State Bd. Health, Madison, Wis. Bids Mar. 21. CD 3/27, under LB.

▲ Acme Home Builders, 14460 Dexter St., Detroit, Mich. Owner Builds. $20,000,000. 2,000 brick HOMES on 450 acres, Bretton Woods section, TRENTON, MICH.

WEST of MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION

† Minn., Duluth—AIRPORT IMPRVS.—B.A. 5/15—U. S. Eng., 1709 Jackson St., Omaha, Neb., site preparation,

runway extension, apron, taxiway, addnl. facilities at Duluth Air Force Base, Inv. 51-33 (SP). CD 4/24.

† South Dakota—TOWERS—B.A. 5/31—Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., furnishing, del. f.o.b. cars shipping point, f.o.b. cars at Mitchell, galvanized-steel double-circuit towers and appurtenance for the Oahe-Fort Randall-Sioux City 230 kilovolt transmission lines, Transmission Div. Missouri River Basin-Proj. Inv. No. DS-3391.

BIDS ASKED—BUILDINGS

Tex., McKinney—HOUSING—B.A. 5/22—McKinney Housing Auth., McKinney, 100 housing units. Tex. 27-1 and 27-2. $825,000. Plans deposit $50. Boese & Harkrider, 1127 Texas and Pacific Bldg., Fort Worth, engr. and archts. CD 10/19/49.

▲ Tex., Midland — PLANT — Bids Asked — Tex-Harvey Gasoline Co., Midland, high-pressure absorption type gasoline plant. $5,750,000. CD 4/18.

SOON LETS CONTRACT—BUILDINGS

Okla., Anadarko—POWER PLANT—Western Electric Cooperative Corp., Anadarko, soon lets contract, power plant. $800,000. Laramere & Douglass, Inc., 79 E. Adams St., Chicago 3, Ill., engr. CD 12/15.

LOW BIDDERS—HEAVY CONSTRUCTION

▲† J. A. Tobin Constr. Co., 3700 Rainbow St., Kansas City, Kan. and L. G. Barcus & Son, 1430 State St., Kansas City, Mo. Low Bidder. $1,375,325. Jersey Creek Sewer, Fairfax-Jersey Creek Unit Kansas City Flood Control Proj. Inv. 110. KANSAS. U. S. Eng., 601 Davidson Bldg., Kansas City, Mo. Bids Apr. 24. CD 3/29.

▲† Kohler, Stover & Ivey and Wyche & Hammond, 7635 Bryn Mawr St., Dallas, Tex. Low Bidder. $2,282,000, est. $2,500,000. rein.-con. power house, installing electrical equip. Tenkiller Ferry Dam on Illinois River, Inv. No. CIVENG 34-066-51-60, near Gore, Sequoyah Co., OKLAHOMA. U. S. Eng., Box 61, Tulsa, Okla. Bids Apr. 20.

† Maxey & Leftwich, 8811 E. Susan St., Albuquerque, N. M. Low Bidder. $623,366, est. $60,000. Water lines, facilities, Serial No. Eng 29-005-51-31, ALBUQUERQUE, N. M. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Apr. 20.

▲† Maxey & Leftwich, 8811 E. Susan St., Albuquerque, N. M. Low Bidder, $623,366, street constr. and asph. paving, ALBUQUERQUE, N. M. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Apr. 20.

† Lembke, Clough & King, 1719 N. 5 St., Albuquerque, N. M. Low Bidder. $327,502. Storm and sanitary sewers, drainage area earthwork. Serial No. Eng 29-005-51-31. ALBUQUERQUE, N. M. U. S. Eng., Box 1538, Albuquerque, N. M. Bids Apr. 20. CD 4/11.

LOW BIDDERS—BUILDINGS

Floyd Richards, 505 Jackson St., Amarillo, Tex. Low Bidder. $639,293. Senior HIGH SCHOOL, DALHART, TEX. Dalhart Independent School Dist., Dalhart, Tex. Bids Apr. 19. CD 4/4.

CONTRACTS—HEAVY CONSTRUCTION

▲ Phillips Petroleum Co. & Assoc., Bartlesville, Okla. Purchase and Hire. $1,385,000. 145 mi. 12-in. crude oil trunk pipe line, Midland area, Midland, Upton, Glasscock and Reagan Counties, TEXAS. CD 4/12.

CONTRACTS—BUILDINGS

Ringland-Johnson Constr. Co., 820½ Locust St., Des Moines, Ia. Contract Awarded. Approx. $500,000. Branch WAREHOUSE and distribution plant, DES MOINES, IA. Massey-Harris Co., 915 King St., Toronto, Ont., Canada. Hanker & Heyer, Commerce Title Bldg., Memphis, Tenn., archts.

▲ Weitz Constr. Co., 406 Fleming Bldg., Des Moines, Ia. Contract Awarded. $1,694,284. Mfg. PLANT, DES MOINES, IA. Solar Aircraft Co., 2200 Pacific Hy., San Diego, Calif. CD 2/16.

Morehead Constr. Co., 217 Dows Bldg., Cedar Rapids, Ia. Contract Awarded. $525,200. COMMUNICATION bldg. at University of Iowa, IOWA CITY, IA. State Bd. Educ., 1007 Des Moines St., Des Moines, Ia. Bids Apr. 4.

▲ Celanese Corp. of America, Bishop, Tex. Own Forces. Approx. $3,502,000. chcemical PLANT expansion, BISHOP, TEX. CD 4/11.

FAR WEST

LOW BIDDERS—BUILDINGS

▲† McPahil Eng. Co., 2904 Alaska St., Tacoma, Wash. Low Bidder. $1,305,168, Sch. 2; John H. Sellen Constr. Co., 228 9 Ave. N., Seattle, Wash., $448,044, Sch. 1 and 3, bldgs. and utilities at Army Proj. Inv. No. 51-148, NORTH RICHLAND, WASH. U. S. Eng., 4735 E. Marginal Way, Seattle 4, Wash. Bids Apr. 24. CD 4/23, under LB.

▲ Viesko & Post, Box 69, Salem, Ore. Low Bidder, $2,038,700. 4 story, 150x240 ft. rein.con., steel COURT HOUSE, SALEM, ORE. Marion Co., Court House, Salem, Ore. Bids Apr. 26. CD 4/13.

CONTRACTS—HEAVY CONSTRUCTION

▲Duncanson-Harrelson Co., & Stolte, Inc., 530 W. Cutting Blvd., Richmond, Calif. Contract Awarded. $1,631,057. Bascule bridge across San Leandro Bay between Bay Farm Island and Alameda, Alameda Co., CALIFORNIA. State Div. Hys., P. Wks. Bldg., Sacramento, Calif. Bids Apr. 18, awarded Apr. 26. CD 4/26, under LB.

Guy F. Atkinson Co., 22233 S. Santa Fe Ave., Los Angeles, Calif. Contract Awarded. $758,221. 13 span

BUILD with less steel... save time and manpower, too

with LIGHTWEIGHT, insulating PERMALITE aggregates

Industrial buildings, schools, hospitals, defense housing, military buildings – all can be built with *less vital* steel. Lightweight Permalite in place of sand in concrete and plaster will reduce the dead-load of a building as much as 80%. Less steel is needed to support this lighter weight concrete and plaster.

Lightweight Permalite/concrete and plaster are easy to handle – quick to apply. With Permalite, rigid completion dates can be set and met!

Get the *full story* – learn how you can build with less steel and save time and manpower too. Mail coupon today.

NO END OF USES

CONCRETE: *Roofs and Floors*—over lightweight decking. *Exterior Walls* – thin, light; easily formed and erected.

Can be monolithically poured or precast into blocks, slabs and panels – can be sawed or nailed!

PLASTER: *Fireproofing*—speedily applied over structural steel. *Interior Walls* – replaces sand plaster – at less than half the weight.

SEND OUT CATALOG in

Permalite
THE LEADING PERLITE AGGREGATE

A Building Product of
Great Lakes Carbon Corporation
and its exclusive Permalite Licensees

Great Lakes Carbon Corporation, Dep't. 165
18 East 48th Street, New York 17, N.Y.

Please send full story on Permalite lightweight construction.

NAME .....

ADDRESS .....

.....

Stang WELLPOINT SYSTEM

For KNOW-HOW • ENGINEERING • SUPERVISION • EQUIPMENT • to keep jobs DRY

The Stang System has proved its efficiency and economy on both large and small jobs all over the United States. Stang engineering and supervision in planning, installation and operation insures a DRY JOB at all times.

JOHN W STANG CORPORATION
2 Broadway, New York 4, N. Y. — 2123 S. 56th St. Omaha, Nebr. — 8221 Atlantic Ave. P.O. Box 631, Bell, Cal.

1021 ft. Work to Blvd. Bridge, 42 ft. roadway, SAN DIEGO, CALIF. San Diego Co. Flood Control Dist., Civic Center, San Diego, Calif. Bids Apr. 19. CD 4/26, under LB.

CONTRACTS—BUILDINGS

▲ **Biltmore Homes, Inc.**, 9434 Long Beach Blvd., South Gate, Calif. Contract Awarded, $3,573,214, 458 frame stucco DWELLINGS in Tract 14224, COMPTON, CALIF. Residence Mortgage Corp., 9434 Long Beach Blvd., South Gate, Calif. Southeast Drafting Service, 2224 W. Florence St., Los Angeles, Calif. archts.

Laurel Lambert Corp, 9244 W. Olympic Blvd., Beverly Hills, Calif. Owner Builds, $906,500, 114 frame, stucco DWELLINGS in Tract 17184, WHITTIER, CALIF.

▲ **Parkwood-Colima Co.**, 739 N. Highland Ave., Los Angeles, Calif. Contract Awarded, $1,211,000, 173 frame, stucco DWELLINGS in Tract 16663, WHITTIER, CALIF. Mailer Constr. Co., 739 N. Highland Ave., Los Angeles, Calif. CD 9/12/50.

ALASKA

LOW BIDDERS—HEAVY CONSTRUCTION

▲† **Kuney-Johnson Co.**, 235 4th Ave., N., Seattle, Wash., Low Bidder, $1,120,000, est. $1,098,429, gymnasium and indoor training facility at Ladd Air Force Base land at Eielson Air Force Base, Inv. No. 595-507-51-76, ALASKA. U. S. Eng., New Washington Hotel, Seattle 2, Wash. Bids Apr. 24. CD 3/28.

LOW BIDDERS—BUILDINGS

▲† **Haddock Engineers, Ltd. & Assoc.**, Insurance Bldg., Seattle 4, Wash., Low Bidder, $2,393,000, refrigerated WAREHOUSE bldg., Inv. No. 595-507-51-77, FORT RICHARDSON, ALASKA. U. S. Eng., New Washington Hotel, Seattle 2, Wash. Bids Apr. 24. CD 3/29.

▲† **Morrison-Knudsen Co. and Peter Kiewit Sons Co.**, 1300 Alaska St., Seattle, Wash., Low Bidder, $1,949,000, est. $1,899,638, indoor TRAINING FACILITY bldg., Inv. No. S 595-507-51-E0, FORT RICHARDSON, ALASKA. U. S. Eng., New Washington Hotel, Seattle 2, Wash. Bids Apr. 24. CD 3/26.

▲† **Valle-Sommers Constr. Co.**, 502 1st Ave., W., Seattle, Wash., Low Bidder, $2,907,717, est. $2,442,932, engineering, quartermaster, signal repair, combined and transit equipment SHOPS, Inv. 595-507-51-70, FORT RICHARDSON, ALASKA. U. S. Eng., New Washington Hotel, Seattle 2, Wash. Bids Apr. 27. CD 4/4.

CONTRACTS—BUILDINGS

▲† **J. C. Boespflug Co. & Assoc.**, 1912 4 Ave., S., Seattle, Wash., Contract Awarded, $2,093,521, 3 story reinforced QUARTERS bldg., Proj. No. 502-230 (a), ANCHORAGE, ALASKA, subject of Indian Affairs, Dpt. Interior. 2nd Low Bidder, 25 D. C. Bids Apr. 19. Under LB.

▲ **Lewis Constr. Co.**, Lewis Bldg., Seattle, Wash., Day Labor, Approx. $3,000,000, 8 buildings with 224 one bedroom APARTMENTS for S. & S. Apartments, with 1 story, 15,000 sq. ft. shopping center, ANCHORAGE, ALASKA. CD 4/27.

▲† **Haddock Engineers, Ltd.**, Insurance Bldg., Seattle 4, Wash., Contract Awarded, $5,786,000, est. $5,848,032, composite bachelor HOUSING, service and recreation center, Inv. No. 595-507-51-18, WHITTIER, ALASKA. U. S. Eng., APO 942 c/o PM, Seattle, Wash.) Anchorage, Alaska. Bids Mar. 27. CD 4-2, under LB.

CANADA

BIDS ASKED—HEAVY CONSTRUCTION

▲ **Nova Scotia**—TUNNEL—Bids Asked—Dominion Steel & Coal Corp., Sydney, 3,000 ft. 20 ft. wide, semi-circular concrete and steel-lined tunnel, Sydney, $5,000,000. Plans deposit $200.

▲ **Nova Scotia**—TUNNEL—Bids Asked—Dominion Steel & Coal Corp., Sydney, 10,000 ft. long, 19 ft. wide, semi-circular concrete and steel-lined tunnel, Glace Bay, $5,000,000. Plans deposit $200.

LOW BIDDERS—HEAVY CONSTRUCTION

Evans, Coleman & Evans, Ltd., foot of Columbia St., McLennan, McFeeley & Price, Ltd., 99 E. Cordova St., Dominion Bridge Co. Ltd., 2450 Boundry St., all Vancouver, B. C., Low Bidder, $755,895, supply, delivery of about 4000 tons of billet steel and reinforcing bars of various sizes, required in connection with the constr. of Granville Street Bridge, VANCOUVER, B. C. City, City Hall, Vancouver, B. C. CD 2-21-49.

CONTRACTS—HEAVY CONSTRUCTION

Poole Constr. Co., Ltd., 10503-109 St., Edmonton, Alta. Contract Awarded, $229,200, Contr. 33, c. conc. sidewalk construction; Fort Constr. Co., Edmonton, Alta., $90,582, Contr. 31, c. conc. curb, EDMONTON, ALTA. City, Civic Block, Edmonton, Alta. Bids Mar. 2, awarded Apr. 16. CD 3-15.

CONTRACTS—BUILDINGS

W. B. Sullivan Constr. Ltd., 30 Bloor St. W., Toronto, Ont. Contract Awarded, $300,000, 30 ft. high 140x220 ft. steel food processing PLANT, NEW TORONTO, ONT. Campbell Soup Co., New Toronto, Ont. Bids Apr. 9, awarded Apr. 21. CD 3/30.

▲ **Foundation Co. of Ontario Ltd.**, 1220 Bay St., Toronto, Ont. Contract Awarded, three 1 story, steel frame, concrete PLANT bldgs. near Horner Ave., TORONTO, ONT. Canadian Steel Improvement Ltd., Toronto, Ont., subsidiary Steel Improvement and Forge Co., 970 E. 64 St., Cleveland, Ohio, U. S. A. Awarded Apr. 23. CD 4/18.

▲ **Foundation Co. of Ontario Ltd.**, 1220 Bay St., Toronto, Ont. Contract Awarded, Approx. $10,000,000, superstructure 6 story, 88x99 ft., NURSES RESIDENCES, TORONTO, ONT., Hospital for Sick Children, University Ave., Toronto, Ont. Bids Apr. 2, awarded Apr. 24. CD 3/28.

▲ **G. Lewinschi**, 3380 Ridgeway Ave., Montreal, Que. Owner Builds, $1,500,000, concrete, masonry APARTMENT BLOCKS, on Cote des Neiges Rd., MONTREAL, QUE. Greenspoon & Assocs., 4151 W. Sherbrooke St. Montreal, archts.

▲ **T. C. Construction Co.**, 3100 Belanger St., Montreal, Que. Contract Awarded, $1,000,000 100 one story concrete block DWELLINGS on 31 and 35 Aves., in Rosemont Ward, MONTREAL, QUE. Continental Housing Corp., 572 Syn Life Bldg., Montreal, Que. P. Paquette 3100 Belanger St., Montreal, Que., archt.

Newton Constr. Co., Ltd., 150 Victoria St., Sherbrooke, Que. Contract Awarded, $555,000, 2 story, basmt., 89x157 ft. 32x16x7 ft. SCHOOL, MAGOG, QUE. Protestant School Bd., P. O. Box 450, Magog, Que. CD 4-25, under LB.

PROPOSED PROJECTS

WATER SUPPLY

Calif., Pittsburg—City, City Hall water treatment plant, reservoir, pipe lines, $695,400. E. L. O'Hara, City Hall, city engr. CD 11/21/49.

Colo., Lakewood—Lakewood Water Co., water sys. improv., $500,000.

▲ **Colo., Pueblo**—Pueblo North Side Water Sys., bonds voted $1,500,000 bonds. Apr. 10, expansion water facilities, reservoir site purchase, pumping station, Black & Veatch, 4706 Broadway, Kansas City, Mo., consult. engrs. CD 3-27.

▲ **Mo., Kansas City**—City Water Dpt., City Hall, Zone 6 voted $2,225,000 bonds Mar. 27, new intake, pumping station at WW., Clay County, Turkey Creek pumping station, improv., Burns & McDonell, 9th and Troost St., Kansas City 5, Mo. and Black & Veatch, 4706 Broadway, Kansas City 2, Mo., engrs. CD 4/3.

N. C., Shelby—City, Shelby, WW improv., changes and addns. to raw water and filtered water supply sys., incl. 4 m.g.d. filter plant. J. N. Pease & Co. Inc., 1104½ E. 3 St., Charlotte, consult. engrs. CD 4/6.

Tenn., Chattanooga—City, City Hall, filtration plant on E. 4 Street D., $450,000.

Tex., Forney—City, water supply from Lavon Dam, $250,000.

Tex., Houston—Harris County Water Control & Improv. Dist. 22, Court House, voted bonds WW extens., improv., and rehabilitation sys. except supply, $375,000; water supply wells, $75,000, in Sunnyside Community. CD 4/12.

Tex., Royse City—City, water supply from Lavon Dam, $225,000.

▲ **Tex., Stamford**—City, c/o mayor, Stamford, voted bonds Mar. 25, construct lake on Paint Creek near Scotts Crossing for new water supply for City, $1,500,000. Freese & Nichols, 407 Danciger Bldg., Fort Worth, consult. engrs. CD 9/16/49.

Man., Swan River—Town, Geo. Salf, mayor, installing water works system, Approx. $200,000.

Ont., Niagara Falls—City, Niagara Falls, auxiliary water system, $412,000. 12/26.

Ont., St. Catherines—St. Catherines Waterworks Comm., St. Catherines, expansion of waterworks to incl. 6 extra filter beds, addnl. reservoir, $500,000. G. F. Lamson, city engr.

SEWERS, WASTE DISPOSAL

Calif., Eureka—City, City Hall, constr. Murray St. sewage treatment plant, $476,158. CD 7/25/49.

Colo., Arvada—Clear Valley Santitation Dist., sewage disposal plant, sewer lines, $270,000, Ripple & Howe, 426 Cooper Bldg., Denver, consult. engrs.

Colo., Englewood—South Englewood Santitation Dist., sewage collection sys. and disposal plant, $420,000, Dale Rea, Boston Bldg., Denver, consult. engr.

N. Y., Johnstown—City, sewage treatment plant, $350,000. CD 2/8/45.

N. Y., New Rochelle—County Comrs., White Plains, addnl. sewage facilities in New Rochelle Sanitary Sewer Dist., $429,000.

O., Youngstown—Mahoning Co. Comrs., Court House, storm sewers, Boardman Park ditch imprvs., Park and Glenwood branches, $208,500. Samuel C. Gould Jr., county engr.

Pa., Pittsburgh—Penn Twp. Comrs., Frankstown Rd., sewage disposal plant at Penn Twp., $500,000. Alex Hutchinson, 608 South Ave., Wilkinsburg, Pa. engr.

Pa., Punxsutawney—Punxsutawney Boro, Boro Bldg., sewage treatment plant, $250,000. Gannett, Fleming, Corddry & Carpenter, Inc., 600 N. 2 St., Harrisburg, engrs. CD 8-22-46.

Pa., Sharon—City, Sharon, $225,000 bond election July 24 garbage disposal plant. CD 5/31/50.

Tex., Houston—Harris County Water Control & Improv. Dist. 22, Court House, voted bonds, storm sewers, $100,000; sanitary sewer sys. extens., imprvs. rehabilitation, $325,000, in Sunnyside Community. CD 4/12.

BRIDGES

▲ **La., New Orleans**—City, City Hall, South Broad overpass, $4,000,000. CD 2-28.

▲ **Mo., Kansas City**—City, Jas. M. Nolan, chn., Pub. Imprvs., City Hall, Zone 6, Sixth St. trafficway, $4,000,000.

▲ **N. Y., New York**—New York Central System, G. A. Noren, ch. engr., 466 Lexington Ave., New York, Zone 17, 4 track vertical lift bridge over Harlem River at E. 133 St. $10,000,000.

North Carolina—State Hy. and Pub. Wks Comm., Raleigh, Catawba Co.—bridge over Catawba River on Hy. 16, at Newton. $500,000.

O., Akron—City, Marvin L. Davis, Service Dir., Municipal Bldg., replace or repair 47-year-old Mill St. bridge. Howard, Needles, Tammen & Bergendoff, 7400 Wilson Rd., Kansas City, Mo. consult. engrs. Chester Schneider, City bridge engr.

O., Dayton—City Comn., Patterson-Riverside bridge with 4 to 6 lane hy. along exten. Riverside Drive, running north from Emmett St. to Cannon St. on wid'n. Stillwater Ave. and from Cannon St. to Great Miami Blvd. along the river levee, 6 lanes from bridge north to Herman Ave., 4 lanes from Herman to Great Miami Blvd. Karl Woditsch, ch. engr. CD 8/3/45.

O., East Liverpool—Ohio Bridge Comn., Columbus, imprv. approaches to bridge over Ohio River. Mojeski & Masters, State St. Bldg., Harrisburg, Pa., consult. engrs.

O., Youngstown—Mahoning Co. Comrs., Court House, reconstr. floor of Credit Mobilier Bridge, $19,000; approaches South Ave. Bridge, $30,000; bridge in Hubbard Rd. over Crab Creek, $28,500, reconstr. Market St. Bridge, $500,000; bridge and approaches in Mill Creek known as Glenwood Ave., $210,000; culvert imprvs. in county, $70,000. Samuel C. Gould Jr., county engr. CD 3/16/44.

Oklahoma—State Hy. Dpt., Capitol, Oklahoma City, **McCurtain Co.**—bridge over the Red River south of Idabel, $660,000. S. K. McClelland, c/o owner, engr.

STREETS AND ROADS

Ariz., Phoenix—City, City Hall, widn., paving 2 mi. sector 16 St., $329,491, R. Gail Baker, City Hall, city engr. CD 2/1/46.

Florida—State Rds. Dpt., Tallahassee,

Clay Co.—regrade, pave Rd. 218 between Middleburg and Rd. 200, $130,000.

Dixie Co.—grade, pave Rd. 55 from Rd. 359 to 3 mi. west of Cross City, 8.5 mi., $450,000. S. P. Turnbull, hy. engr.

▲ **Ohio**—State Hy. Dpt., Columbus, freeway from Cleveland to Columbus to Cincinnati, $300,000,000. Arthur Stevens, in charge of route survey. CD 2/23/45.

O., Youngstown—City, widen 13 block stretch of South Ave. from Mahel Ave. to King St., 13 block stretch of South Ave. from Indianola Ave. to Market St. from 30 to 54 ft., $694,000, James C. Ryan, city engr.

Tex., San Antonio—City, City Hall, Military Plaza, general rehabilitation of various paved and unpaved streets, $250,000. W. W. Toxey, city engr. CD 12-14-49.

Wash., Seattle—City, County-City Bldg., Zone 4 resurf., Dexter Ave. from 4 Ave. N. to Mercer St. and other streets, $420,000; paving 21 Ave. S. W. et al, $102,968. R. W. Finke, city engr.

▲ **Alberta**—Dpt. Public Wks., Edmonton, Alta. (Prov. Govt.), work on the Trans-Canada Hy. between Medicine Hat and Bassano. Approx. $4,000,000. CD 12/3/43.

EARTHWORK, WATERWAYS

▲† **Indiana**—U. S. Eng., 520 Merchandise Mart, Chicago 54, Ill., harbor at Burns Ditch on Lake Michigan for Public use and steel mill establishment, $3,500,000.

Iowa—State Water Conservation Bd., 914 Grand St., Des Moines, Lizard Lake imprvs., Pocahontas Co. $50,000; Brown's Lake imprvs., Woodbury Co., $40,000; constr. new lake, Montgomery Co., $175,000.

▲ **North Carolina**—Virginia Electric & Power Co., 7 and Franklin Sts., Richmond, Va., dam and power house on Roanoke River, $3,000,000.

AIRPORTS

Ark., Little Rock—RUNWAY—Little Rock Airport Bd., Little Rock extending NE/SW runway at Adams Field and other work $750,000. L. A. Henry, Pyramid Bldg., Little Rock, consultant. CD 8/18/49.

Pa., Morton—HANGAR—Piasecki Helicopter Corp., 100 Woodland Ave., plans by Carroll, Grisdale & Van Alen, 204 W. Rittenhouse Square, Phila., flight operation hangar, $700,000.

▲† **Wash., Whidbey Island**—AIR STATION, etc.—Pub. Wks. Officer, Thirteenth Naval Dist., 1611 W. Wheeler St., Seattle, plans by Naramore, Bain, Brady & Johanson, 904 7 Ave., Seattle, naval air station bldg., $2,000,000; L. Bouillon & Assocs., 1411 4 Ave. Bldg., Seattle 1, Wash., consult. engrs., 8,000 ft. long and 200 ft. wide, jet plane runway, $4,432,000. Gardner & Hitchings, Inc., C. C. Arnold and R. C. Smith, Arctic Bldg., Seattle 4, Wash., consult. engrs. CD 4/5/45.

† **Alaska**—MAINTENANCE DOCK—U. S. Eng., (APO 942, c/o PM, Seattle, Wash.) Anchorage, plans by

(Continued on page 97)

WANT TO CUT DOWN ON "worry smoking?"

JUST CONSULT THE BUTLER ENGINEER!

Costs rising? Labor shortage really making itself felt? Competition getting rough? Breakdowns costly and too frequent?

Well, BUTLER claims no cure-all, — but it very often happens that a conference with the BUTLER Engineer brings out some ingenious idea, or a suggestion or two, which leads to faster, more automatic operation, to cost-cutting procedures or to a smoother uninterrupted production flow. And after all, those are the answers to the questions that cause most "worry-smoking."

And of course, if you are buying a Road-builder Batching Plant . . . or a Ready Mixed Concrete installation, head-off your "worry-smoking" before it starts. That's when the BUTLER Engineer can serve you best.



CENTRAL MIXING PLANTS

BUTLER PLANTS are widely recognized as examples of brilliant engineering in a great variety of materials handling problems. Here the experience of the BUTLER Engineer is invaluable.



READY MIXED PLANTS

Ready Mixed Concrete Plants for every production level — engineered by BUTLER for the highest efficiency and lowest cost operation.

AGGREGATE PLANTS

Highly portable, quickly erected, BUTLER Aggregate Plants save time and money in meeting high pressure paving schedules.



BULK CEMENT PLANTS

A wide range of capacities for every roadbuilding job. Faster batching, split-pound accuracy. Shown is the CR-37-58 providing 650 bbls. capacity.

BUTLER BIN CO.
WAUKESHA, WISCONSIN

It's time we got *working* mad!

As we listen to the latest insults from Moscow, we're likely to get fighting mad.

Instead, we'd better use our heads and get *working* mad.

It is clear by now that Stalin and his gang respect just one thing—strength. Behind the Iron Curtain they've been building a huge fighting machine while we were reducing ours. Now we must rebuild our defenses—*fast.*

As things stand today, there is just *one* way to prevent World War III. That is to re-arm—to become strong—and to stay that way!

This calls for better productivity all along the line. Not just in making guns, tanks and planes, but in turning out civilian goods, too.

Arms must come first. But we must produce arms *at the same time* we produce civilian goods.

We can do this double job if we all work together to turn out more for every hour we work—if we use our ingenuity to step up productivity.

All of us must now make sacrifices for the common good. But we're working for the biggest reward of all —*peace with freedom!*

THE BETTER WE PRODUCE THE STRONGER WE GROW

A PUBLIC SERVICE PROJECT ★ THE ADVERTISING COUNCIL ★

FOR A FREE COPY OF "THE MIRACLE OF AMERICA"

MAIL THE COUPON to Public Policy Committee, The Advertising Council, Inc., Dept. B.P., 25 West 45th Street, New York 19, N. Y.

Name .....

Address .....

.....

McGRAW-HILL PUBLISHING COMPANY

(Continued from page 94)

Barrett & Logan, 1940 S.W. 4th Ave., Portland, Ore., VHB maintenance dock, Eielson Air Force Base. $600,000. CD 11/27.

▲ Man., MacDonald—RUNWAYS—Defence Constr. Ltd., Kensington Bldg., Winnipeg, runways at Royal Canadian Air Force Base, $2,000,000. K. F. Hurst, c/o owner, engr.

▲ Man Portage La Prairie—TRAINING SCHOOL—Defence Constr. Ltd., Hunter Bldg., Ottawa, Ont., advanced flying training school at Macdonald airport, Approx. $5,500,000.

▲ Man., Winnipeg—HOUSING—Central Mortgage & Housing Corp., Kensington Bldg., Winnipeg, housing development near Stevenson Air Field for Royal Canadian Air Force Base, $1,000,000. K. F. Hurst, Defence Constr. Ltd., Kensington Bldg., Winnipeg, engr.

LATIN AMERICA

Mexico, Chihuahua—Eloy S. Ballina and Assoc., Domicilio Conocido, Chihuahua City, Mexico, plans cellulose factory. $17,350,000.

▲ Mexico, Minatitlan—Mexican Gulf Sulphur Co. and subsidiary Mexican Sulphur Co., Mexico City and Minatitlan, Mexico plans sulphur mining and production facilities, near here. $1,875,000.

▲ Mexico, Mexicali—Mexican Govt., Sria. de R.H., Paseo de la Reforma, 69, Mexico City, plans deep well-chain irrigation. $7,000,000.

Mexico, Mexico City—Hojalata y Lamina, S.A., Cipres, 280, Mexico City, plans iron-steel products factory. $500,000.

Mexico, Mexico City—Municipal Govt. (Lic. Fernando Casas Aleman, mayor) Palacio Municipal, Mexico City, plans 4,000 seat music theatre. $500,000.

Mexico, Mexico City—Remington Rand, S.A. (Mario Soni, mgr.) Madero, 55, Mexico City, plans typewriter factory. $750,000.

Mexico, Piedras Negras—National Railways of Mexico, Ing. Manuel R. Palacios, genl. mgr., Bolivar 19, Mexico City, plans passenger-freight station. $850,000.

Mexico, Quadalajara—Municipal Govt., Palacio Municipal, Guadalajara, Jalisco, Mexico, plans five public markets. $1,000,000.

PUBLIC BUILDINGS

Ark., Fort Smith—HIGH SCHOOL—Fort Smith Public Schools, c/o J. W. Ramsy, supt., 400 N. 15 St., plans by Bassham & Wheeler, Mercantile Natl. Bank Bldg., Junior-High School. $649,400. CD 2/23.

▲ Ark., Little Rock—SCHOOLS—Pulaski Special School Dist., c/o J. L. Wastson, supt. and secy., Little Rock, plans by Wittenberg, Deloney & Davison, 402 Pyramid Bldg., Little Rock, 19 schools in county and addns. to others. $1,000,000.

Calif., Atwater—SCHOOL—Mitchell Union Elementary School Dist., Atwater, school. $581,000.

Calif., Eureka—HOUSING—City, City Hall, plans by Frank T. Georgeson, 537 G St., 100 low rent housing units, Proj. Cal. 25-1. $682,000.

▲ Calif., Long Beach—SCHOOLS—Long Beach City Bd. Educ., 715 Locust Ave., plans by Kenneth S. Wing, 30 Linden Ave., Alexander Hamilton Junior High School, $1,350,000; John Marshall Junior High School, $1,250,000. Van Alsteine & McLean, 3916 Mytle Ave., Long Beach, consult. engr. CD 11/18/48.

▲† Calif., San Francisco—RADIOLOGICAL—Twelfth Naval Dist., Room A-110, Federal Office Bldg., construct prefabricated steel frame bldg., conversion of bldgs. for Naval Radiological Bldg. at Hunters Point. $1,300,000. Leland S. Rosener, 233 Sansome St., structural engnr. CD 2/1.

Colo., Brighton—SCHOOL—School Dist. 27, Adams Co., bond election May 7, Junior High School addn., remodeling existing high school into a Junior High School, high school, $936,000. Atchison & Kloverstrom, 1254 Monaco Parkway, Denver, consult. engrs. CD 12/26/48.

Colo., Glenwood Springs and Newcastle—SCHOOLS—Garfield Co. School Dist., Glenwood Springs, bond election in May, high schools in Glenwood Springs and Newcastle. $760,000.

Colo., Pueblo—SCHOOL—School Dist. 60, Pueblo Co., plans by Walter DeMordaunt, 738 Thatcher Bldg., 2 story, brick North Side Junior High School. $850,000.

Conn., Rocky Hill—SCHOOL—Town, Bd. Educ., plans by Keith Sellars Heine, 71 Oxford St., Hartford, Junior High School. $650,000.

Conn., Storrs—AUDITORIUM—State P. Wks. Comr., State Office Bldg., Hartford, plans by Frederick C. Teich, 252 Asylum St., Hartford, 2,300 seating auditorium at University of Connecticut. $900,000. CD 1/19/49.

Idaho, Boise—SCHOOL—School Bd., 1207 Fort St., plans by Wayland & Fennell, Idaho Bldg., and Hummel, Hummel & Jones, 14 and Idaho Sts., Boise, Junior High School, $785,000. CD 12/6.

▲ Ill., Chicago—HOUSING—Chicago Housing Auth., 609 S. Dearborn St., Zone 16, plans by Naess & Murphy, 80 E Jackson St., Zone 14, addn. to existing housing Project, (Altgeld Gardens) 130 St. and C.E. and I.R.R. R.R. $1,000,000, plans by Lobel Schlossman & Bennett, 333 N. Michigan St., Zone 1, 300 unit apartments at 108 and Oglesby Sts. $2,000,000. CD 9/7.

▲ Ind., Charlestown—SCHOOL—Charlestown Twp., Charlestown, plans by McQuire & Shook, 1401 Fletcher Trust Bldg., Indianapolis, 1 and 2 story, brick, high and grade school. $1,000,000.

Ia., Muscatine—HOSPITAL—Muscatine co., Plans by Morgan-Gelatt & Assoc., Burlington, hospital. $500,000. CD 10/2/47.

ATLANTIC Pneumatic TOOLS

Use with your standard power pavement equipment . . . .

THE ATLANTIC PNEUMATIC ROCK BREAKER

Splits Large Rocks and Boulders quickly
No Plugs and Feathers — No Explosives
Nearly 4½ times faster

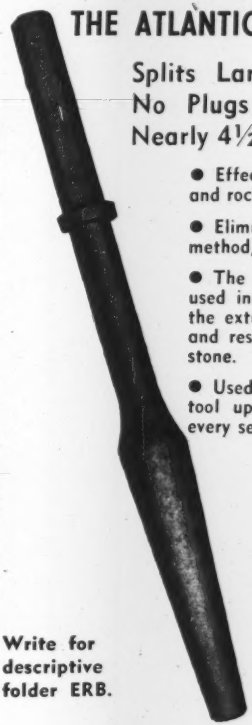

- Effective quick action in removing stones, boulders and rocks from excavations and ditches.
- Eliminates the slow and costly plug and feather method, and the risky and troublesome use of explosives.
- The specially heat-treated Atlantic Tool Steel used in the Atlantic Pneumatic Rock Breaker gives it the extreme toughness to withstand the severest usage and resist breakage regardless of the hardness of the stone.
- Used with standard power pavement breakers. No tool upkeep. Tougher than any stone. A size for every service.

Write for descriptive folder ERB.

Specialists in Tool Steels for chisels, drills, blacksmith tools and Alloy Steels for axles, bolts, pins, pistons and shafts.

Non-tempering tool steels for greater safety and speed.

ATLANTIC STEEL CORP. 1775 BROADWAY, N. Y. 19

LOCATE HIDDEN VALVE BOXES, surveyor's stakes, manhole covers, septic tanks...
with the "AQUA VALVE BOX LOCATOR"
....quickly, easily, cheaply!

$29.50
F.O.B. CIN., O. with fine leather case

Thousands are used by Water Dept. and Gas Co. men and surveyors. Instant top-view periscope reading. Rubber-mounted cobalt steel dipping needle guaranteed for ten years. Accurate in ice and snow in all terrain. Also serves as a rugged accurate compass.

Time and trouble saved in finding just one valve box could pay for it. Send for complete illustrated description. Ask about 15 day FREE TRIAL

AQUA SURVEY & INSTRUMENT CO.
2517 LESLIE AVENUE
CINCINNATI 12, OHIO

PILES

CASED | WOOD
COMPRESSED | COMPOSITE
PRECAST | STEEL PIPE

They're all here . . .

MacArthur

Learn more of the MacArthur story. You will find it in an eight-page booklet available to you. Information about piles, equipment, and jobs is yours for the writing—just ask for: 'MacARTHUR.'

MacArthur
CONCRETE PILE CORP.
18 East 48th St., New York 17, N. Y.
★ ★ ★ ★
New Orleans • Cincinnati • Boston

EPPINGER AND RUSSELL CO.
Wood Preservers Since 1878
80 Eighth Ave., New York 11, N. Y.
PRESSURE TREATED
TIES—POLES—PILING—LUMBER
WITH
Creosote or
Chromated Zinc Chloride
TREATING PLANTS
Jacksonville, Fla. Norfolk, Va.
Eddington, Pa.

PREMOLDED CALKING



is the labor saving short cut to weather-tight corrugated roofing and siding. Fabco Corrugated Calking Strips are preformed of compositions of rubber or asphalt to fit all standard sheet metal corrugations. Easily and quickly installed as sheets are laid. Placed between aluminum sheets and steel members, they insulate against galvanic corrosion. For full information and diagrams of typical corrugated construction assemblies, write for Bulletin 501 — TODAY!

FABRICATED PRODUCTS CO.
West Newton, Pa.

Ia., **Sioux City**—SCHOOL—Bd. Educ., 1221 Pierce St., $600,000 bond election May 7, school, $600,000. CD 16/6.

Kan., **Emporia**—EDUCATIONAL BLDG.—State Bd. Regents, Topeka, plans by C. L. Marshall, Topeka, secondary educational bldg. at Emporia State College. $540,000.

La., **Alexandria**—SCHOOL—Rapides Parish School Dist., c/o E. S. Aiken, supt., plans by Barron, Heinberg & Bracato, Alexandria, negro high school. $644,700.

▲ Mass., **Boston**—HOUSING—City of Boston Housing Auth., 230 Congress St., plans by Arland A. Dirlan, 673 Boylston St., 645 units housing Proj. PHA Mass. 2-15, Albany and Harrison Aves., $7,250,000; plans by Thomas F. McDonough, 25 Huntington Ave., 732 units housing Proj. PHA 2-19, Bromley Park, Roxbury, $10,250,000.

▲ Mass., **Chelsea**—HOUSING—City of Chelsea Housing Auth., City Hall, plans by Kelly & Gruzen, 73 Tremont St., Boston, 3 story, bsmnt., 95 units, rein.-con. masonry housing, Crescent St. at B. & M. R. R., $1,000,000, Wm. Davies, 73 Tremont St., Boston, assoc. archt.

Mass., **Holyoke**—INFIRMARY—City, Pub. Welfare Dpt., City Hall, infirmary, Ingleside St. $850,000.

▲ Mass., **Reading**—SCHOOL—Town, supt. schools, plans by Adden, Parker, Clinch & Crimp, 177 State St., Boston, high school, $2,400,000. CD 12/5.

Mich., **Ann Arbor**—RESEARCH—Bd. Regents University of Mich., plans by C. L. T. Gabler, 924 Hammond Bldg., Detroit, brick, steel engineering research bldg., $800,000.

Minn., **Granite Falls**—SCHOOL—Bd. Educ., M. S. Orwell, clk., plans by Pass & Rockey, Mankato, grade school, $500,000.

Neb., **Chadron**—DORMITORY—State Normal Bd., Capitol Bldg., Lincoln, dormitory at Chadron State Teachers College. $500,000.

Neb., **Kearney**—DORMITORY—State Normal Bd., Capitol Bldg., Lincoln, dormitory at Kearney State Teachers College. $500,000.

Neb., **Lincoln**—DORMITORY—University of Nebraska, City Campus, Lincoln, dormitory. $500,000. CD 3/11/48.

Neb., **Peru**—DORMITORY—State Normal Bd., Capitol Bldg., Lincoln, dormitory at Peru State Teachers College. $500,000.

Neb., **Sidney**—LIGHT and POWER PLANT—City, light and power plant addns., extensions. $500,000. Fulton & Cramer, 922 Trust Bldg., Lincoln, consult. engrs. CD 3/6.

Neb., **Wayne**—DORMITORY—State Normal Bd., Capitol Bldg., Lincoln, dormitory at Wayne State Teachers College. $500,000.

▲ O., **Shelby**—GENERATOR—City, City Hall, installing 75,000-kilowatt turbine generator at municipal power plant. $1,000,000. Emery, Marker & Emery, Toledo Trust Bldg., Toledo, consult. engrs.

O., **Tipp City**—POWER PLANT—City, Russell Blank, supt. of utilities, Tipp City, impry. municipal power plant, incl. new diesel units. $600,000.

Okla., **Norman**—SCHOOL—Norman Independent School Dist., c/o J. D. Garrison, supt., plans by Perkins & Will, 309 W. Jackson St., and Caudill, Rowlett & Scott, College Station, Tex., assoc. archt., school. Okla. 51-C-11-A. $749,486. CD 10/9.

▲ Okla., **Oklahoma City**—HIGH SCHOOL—Oklahoma City Independent School Dist. No. 89, c/o N. L. George, asst. supt., 400 N. Walnut St., plans by Wright & Selby, 212 Hightower Bldg., SW Junior-High School. $1,928,179. CD 5/2/49.

Pa., **Aliquippa**—HIGH SCHOOL—Consolidated School Dist., of Raccoon, Hopewell and Independence Twps., Aliquippa, plans by B. J. McCandless, 239 4th St., Ellwood City, Junior High School Hopewell Twp. $850,000. CD 6/2.

Pa., **Harrisburg**—SCHOOL—Harrisburg School Bd., 121 Chestnut St., plans by W. L. Murray, 1600 N. 2nd St., 750-pupil Downey School, Calder and Monroe Sts. $750,000. CD 11/14.

▲ Pa., **New Castle**—SCHOOLS—School Bd., New Castle, plans by Thayer & Co., 408 Greer Bldg., New Castle, 3 schools. $3,960,000.

▲† S. D., **Lake Andes**—SCHOOL—U. S. Eng., 1709 Jackson St., Omaha, Neb., school, $1,000,000.

Tex., **Corsicana**—HOUSING—Corsicana Housing Auth., Corsicana plans by Boese & Harkrider, T & P Passenger Bldg., Fort Worth, 114 housing units. $912,000. CD 10/5/49.

▲ Tex., **Dallas**—HOUSING—Dallas Housing Auth., 2525 Lucas Dr., Dallas, plans by Howard R. Meyer, 2907 Maple St., Tex. 9-7, housing project, $850,000; plans by Tatum & Quade, 2812 Fairmount St., Tex. 9-9, housing project, $1,250,000. CD 12/2/49.

▲ Tex., **Orange**—HOSPITAL—City and Orange Co., c/o C. O. Chandler, Orange, 200-bed hospital. $1,500,000. J. M. Morris, c/o C. O. Chandler, Orange, consult. engr.

▲ Tex., **Pasadena**—SCHOOL—Pasadena Public Schools, c/o V. W. Miller, supt., Box 71, plans by Loyd & Morgan, 4605 Montrose Blvd., Houston, combined elementary-Junior High School. $1,246,000. CD 11/17/49.

▲ Va., **Arlington**—SCHOOLS—Arlington Public Schools, 2732 Wilson Blvd., voted $4,875,000 bonds, first unit of a new Junior High School, Rhees Burkett, 1223 Connecticut Ave., N.W. Wash., D. C., archt; elementary facilities and addns. to existing elementary bldgs., McLeod & Ferrara, 1741 DeSales St., N.W. Wash., D. C., archts.

▲ Va., **Staunton**—SCHOOLS—City School Bd., Staunton, Robert E. Lee high school, $750,000. West End grade school, $600,000.

Wash., **Colfax**—SCHOOL—School Bd., plans by Geo. M. Rasque & Son, Washington Trust Bldg., Spokane, 1 story, frame school, $600,000. CD 4/16.

Wash., **Kelso**—SCHOOL—School Bd., Kelso, voted bonds, Junior High School, $850,000. Wolff & Phillips, Pearson 4th Ave. Bldg., Portland, Ore., archts. CD 10/12.

Wyo., **Casper**—HOSPITAL—Natrona County Memorial Hospital, Casper, plans by Fisher & Fisher, Denver National Bldg., Denver, Colo., 200 bed hospital. $600,000.

▲ Alaska, **Anchorage**—HOUSING—Alaska Housing Auth., Juneau, plans by Miller & Ahlson, 1410 Hubbel Pl., Stuttle, Wash., 150 unit housing project. $2,000,000. CD 12/2/49.

▲† Alaska, **Kodiak**—HOUSING—Bureau Yards and Docks Annex Navy Dpt., Arlington, Va., 410-unit housing project for naval and civilian personnel at Naval Base. $5,000,000.

▲ Que., **Montreal**—HOSPITAL—Jewish General Hospital, 3758 Cote Ste. Catherine Rd., plans by McDougall & Assocs., 1235 McGill College Ave., remodeling part existing hospital and addn. $2,000,000. H. Jasen, 1410 Guy St., engr.

▲ Que., **Montreal**—HOSPITAL—Children's Memorial Hospital, Dorchester St. and Atwater St., Montreal, plans by McDougall, Smith & Flemming, 1235 McGill College Ave., Montreal, private patients' pavilion alterations, $345,000; out-door department and 150-bed hospital unit, $1,850,000; nurse's home on Essex St., $1,080,000; tunnel connecting main units, $1,000,000. Total Est., $4,275,000. McDougall & Friedman, 1235 McGill College Ave., Montreal, Que., engrs. CD 1/12/45.

COMMERCIAL BUILDINGS

Ala., **Birmingham**—COMMUNITY CENTER—Jewish Community Center, c/o Warren, Knight & Davis, archts., Protective Life Bldg., community center, $500,000.

Calif., **Barstow**—DWELLINGS—Meyer-Nash Corp., 852 Hollywood Way, Burbank, 64 frame, stucco dwellings in Tract 3509, $590,000.

Calif., **Los Angeles**—DWELLINGS—Woodman Park, Inc., 5658 W. 3 St., Los Angeles, 105 frame, stucco dwellings, $802,290.

Calif., **Sacramento**—HOTEL REMODELING—Hotel Senator, Inc., 12 and L Sts., plans by Leonard Starks, 416 Native Sons Bldg., remodeling Hotel Senator, $800,000.

▲ Calif., **San Francisco** — HOSPITAL — Permanente Foundation, Broadway and MacArthur Blvd., Oakland, plans by Wolff & Phillips, Pearson-Fourth Ave. Bldg., Portland, Ore., 210-bed hospital at Geary, O'Farrell and St. Joseph Aves., $2,300,000.

▲ Calif., **San Francisco**—HOSPITAL ADDN.—St. Luke's Hospital, Valencia and Army Sts., San Francisco, plans by Skidmore, Owings & Merrill, 1 Montgomery St., San Francisco, 52 bed St. Luke's Hospital addn., $2,300,000.

Fla., **Miami Beach**—CHURCH—All Souls In the Palms Church c/o John E. Petersen & Frank H. Shuflin, archts., 206 Roper Bldg., Miami, church, $500,000.

Ga., **Augusta**—ADMINISTRATION BLDG.—Medical College of Georgia, Augusta, administration bldg. $600,000.

Ill., **Belleville**—CHURCH—Blessed Sacrament Catholic Parish, Rev. Louis F. Ell, pastor, 8901 W. Main St., plans by Albert M. Goedde, 1452 A State St., East St. Louis, colonial-type brick, rein.-con. church. $400,000-$500,000.

Ia., **Fort Madison**—HOSPITAL—Sacred Heart Hospital, Fort Madison, plans by Morgan-Gelatt & Assoc., Burlington, hospital. $500,000.

▲ Ind., **Indianapolis**—HOUSING—Leo R. Alhand, 5815 N Delaware St., Indianapolis, Zone 20, 1,000 dwelling units housing project, 25 apartment bldgs. 10 to 16 Sts., West to Milburn St., all 2 story, bsmnt. brick, rein.-con., $6,000,000. Paul I. Cripe, Inc., Lemcke Bldg., Indianapolis, 4 Ind., consult. engr.

▲ Mass., **Arlington**—SHOPPING CENTER—Owner, c/o Nathaniel Hamlen, trustee, 11 Pemberton Square, Boston, plans by Sumner Schein, 333 Washington St., Boston, 100,000 sq. ft. shopping center incl. 15 stores, Concord Turnpike, East Arlington, $2,500,000.

▲ Mich., **Detroit**—HOSPITAL—Herman Kiefer Hospital, Taylor and Hamilton Sts., brick, steel tuberculosis hospital addn., $2,000,000.

▲ N. Y., **Brooklyn**—APARTMENT—Milton Fox, 885 Flatbush Ave., plans by Kavy & Kavovitt, Inc., 44 Court St., Zone 2, 6 story apartment at 1232 Avenue Z and 2602 E. 13 St. $1,152,000.

O., **Dayton**—CHURCH—Westwood Baptist Church, Rev. John W. Kurtz, 544 Anna St., church near 3717 Fairbanks St. incl. and educational unit. $500,000.

O., **Sandusky**—HOSPITAL—Bd. Trustees, Memorial Hospital, John F. Kerchner, chn., Sandusky hospital on 10 acre site. $750,000.

Tex., **Dallas**—APARTMENT—W. H. Cothrum, Co., 2115 E. Field St., 122 apartment units for Negroes, in Central Expressway area off Hatcher St. $854,000.

▲ Tex., **Freeport** — DWELLINGS — Lakewood Gardens, Inc., c/o Melvin A. Silverman, 6205 Almeda Rd., Houston, plans by Lloyd & Morgan, 4605 Montrose St., Houston, 100 frame type dwelling units concrete and post fdn., $500,000; 50 frame and cedar shakes duplexes, concrete slab fdn., central heating, $600,000, at Lake Jackson.

▲ Tex., **Houston**—DWELLINGS—Jess Little, 2902 Midlane St., plans by Charles W. Oliver, 2626 Westheimer St., 12 two story masonry dwellings along new South Braeswood Blvd. in Linkwood area, $600,-

(Continued on page 100)

CUT DIGGING COSTS

with the new Sherman Power Digger

WRITE FOR LITERATURE TODAY!

Patented, actuated bucket gives you selective digging action, better loading, greater versatility.

All-hydraulic action—made possible by heavy-duty hydraulic cylinders—assures efficient performance.

SPECIFICATIONS

Shovel reach below ground surface	8 feet
Digger reach behind tractor	10 feet
Swinging arc	140°
Trench width, standard digging shovel, single cut	18 inches
Digging shovel capacity	3.5 cu. feet
Loading shovel capacity	5 cu. feet
Loading clearance, digging shovel, loaded	7 feet
Loading clearance, loading shovel	10 feet

Standard tractor mounting gives unmatched maneuverability and transportability.

•

Digs ditches, trenches, footings, culverts, basements and other excavations.

Works well behind the tractor at any angle.

•

Actuated bucket raises high enough to load standard dump truck.

•

Handles roots, rocks, hard clay and oiled road surfaces.

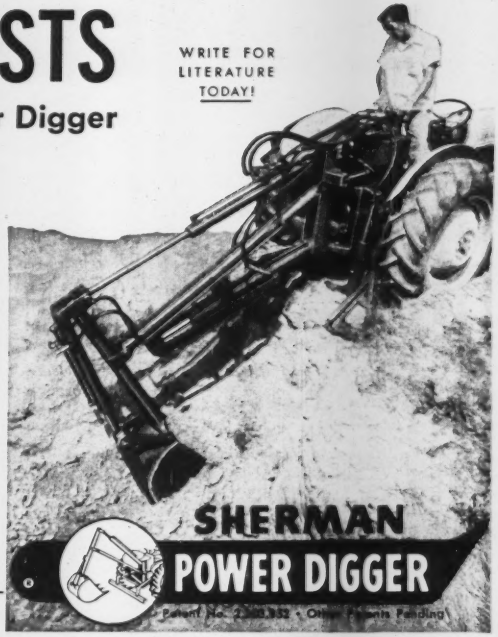

Designed, Engineered and Manufactured Jointly By
SHERMAN PRODUCTS, INC. • Royal Oak, Michigan
WAIN-ROY CORP. • Hubbardston, Massachusetts
Sold Exclusively By **SHERMAN PRODUCTS, INC.**

SHERMAN PRODUCTS INC., ROYAL OAK, MICH.

FULLER MANUFACTURING COMPANY (Transmission Division), KALAMAZOO 13F, MICHIGAN

UNDERPINNING

Its Practice and Applications

Second Edition, Revised and Enlarged, published by Columbia University Press

By EDMUND ASTLEY PRENTIS and LAZARUS WHITE

The new edition of this authoritative technical description of underpinning methods and applications for foundation construction has been extensively revised and brought completely up-to-date. The authors describe in detail actual cases of every type of underpinning.

The volume also contains an introductory treatise on soil mechanics, nearly 200 photographs and drawings, and appendices which include, among other information, specifications, legal aspects of underpinning and foundation work, and a glossary of terms. Underpinning is considered the authoritative source for information in the field by engineers, architects, and contractors all over the world.

Price **$10.00**

COFFERDAMS

Second Edition, Revised and Enlarged, published by Columbia University Press

By LAZARUS WHITE and EDMUND ASTLEY PRENTIS

Cofferdams is the only engineering book devoted entirely to the design of cofferdams.

Presentation is made of theoretical considerations of the hydrodynamics of seepage forces, stream erosion, and lateral earth pressures for cofferdams on land and in water. Actual design and construction features are presented by detailed case studies of cofferdams which have come under the authors' supervision. Construction equipment, pumping stations, sheetpiling of wood and steel, bracing systems, excavation methods are among the features described. Actual cases of pitfalls and failures, as well as successes, are given.

This new edition contains 201 photographs and drawings, a glossary of terms, and a bibliography.

Price **$10.00**

"Send order to Columbia University Press, 2960 Broadway, New York 27, N. Y."

SPENCER, WHITE & PRENTIS, INC.

10 EAST 40th ST. NEW YORK 16, N. Y.

602 HAMMOND BLDG. DETROIT 26, MICH.

"UNTOLD *Savings* IN *money*"

By the use of

ATLAS SPEED FORMS

"We have been able to effect substantial savings in the time . . . to set up . . . and . . . tear down, which means untold savings in money."

HOWARD C. GRUBB,
Building Contractor
Tulsa, Oklahoma

IRVINGTON FORM & TANK CORP.
Irvington 37, N. Y.

Send more information. I am interested in forms for_____

Name_____

Firm_____

Address_____

PITTSBURGH · DES MOINES

ELEVATED STEEL TANKS

We design, fabricate and erect Elevated Steel Tanks for every industrial purpose—in all types and capacities. *Write for our descriptive Elevated Tank Bulletin.*



PITTSBURGH · DES MOINES STEEL COMPANY

Pittsburgh, Pa. 3414 Neville Island
Des Moines, Ia. 915 Tuttle Street
Santa Clara, Cal. 621 Alviso Road

(Continued from page 98)

000; 12 one and two story masonry dwellings, concrete slab and beam fdn., furnace heating immediately south of Linkwood, $480,000.

▲ Tex., Houston—DWELLINGS—J. S. Norman Building Corp., 4815 Richmond Rd., construct number of frame and partial masonry type dwellings, various locations, $350,000; Proj. 1, 50 frame dwellings, Northcrest St., concrete slab fdn., $450,000; Proj. 2, 30 frame dwellings, concrete slab fdn. in an extens. of Mentridge St. $310,000; Proj. 3, 34 frame, dwellings, concrete slab fdn., various sites; $340,000.

Tex., San Antonio—GIRLS SCHOOL—Sisters of Divine Providence, c/o Lady of The Lake College, 24 and Durango Sts., girls school. $500,000.

▲ Tex., Houston—DWELLINGS—The Fairworth Co., 1932 North Blvd., plans by Edward Bodet, 3239 Louisiana St. Proj. No. 1, 75 semi-permanent type dwellings, $975,000; Proj. 2, 100 dwellings, $1,200,000; Proj. 3 110 masonry dwellings, concrete slab fdn. $1,320,000; Proj. 4, 85 semi-permanent type dwellings, $1,020,000 in 108-acre tract in extens. of Sec. 3, Lamar Terrace.

INDUSTRIAL BUILDINGS

▲ Calif., Merced—CANNERY—Filice & Perrelli Canning Co., S. 10 and Hall Aves., Richmond, cannery bldg. at 13 St. W St. in Merced. $1,000,000. Mac D. Perkins, 110 Sutter St., San Francisco, structural engr.

▲ Ga., Jesup—MILL—C. C. Mengel Co., 1122 Dumesnil St., Louisville, Ky., paper mill, $10,000,000.

Ga., Summerville—MILL—Bigelow-Sanford Carpet Co., Summerville, mill addn., $500,000.

▲ Ind., Newburgh—GENERATING STATION—Southern Indiana Gas & Electric Co., Hulman Bldg., Evansville, steam generating station with 40,000 kilowatt capacity on Ohio River above here, $12,000,000.

▲ Ill., Wood River—GENERATING PLANT—Illinois Power Co., C. A. Au, chief engr., div. mgr., 16 E. Lorena St., construct fourth sect. addn. 100,000 kw generating plant. $20,000,000.

▲ Kan., Hugoton—PLANT—Hugoton-Plains Gas & Oil Co., Hugoton, gasoline plant, $1,750,000.

▲ Kan., Ulysses—PLANT—Stanolind Oil & Gas Co., First National Bank Bldg., Wichita, natural gasoline plant, $2,750,000. CD 12/4/47.

▲ Mont., Glendive—PLANT—Chromium Mining & Smelting Corp., Sault St. Marie, Ontario, Canada, smelter plant, $1,500,000, J. I. Rankin, c/o owner's engr.

▲ N. J., New Providence—ENGINEERING, etc.—Thomas & Betts Co., Inc., 6 Butler St., Elizabeth, 120,000 sq. ft. engineering dpt. and offices, $1,000,000.

▲ N. M., Eunice—PLANTS—Skelly Oil Co., Skelly Bldg., Tulsa, Okla., gasoline plant No. 1, expans. $1,250,000; expans. of gasoline Plant No. 2. $1,000,000. CD 2/23.

▲ N. C., Marion—PLANT—American Thread Co., Kerr St., Fall River, Mass., plans by J. E. Sirrine & Co., 215 Main St., Greenville, S. C., finishing plant. Approx. $3,000,000. CD 4/19.

▲ O., Mount Vernon—FACTORY—Shellmar Products Corp., Mount Vernon, factory, $2,000,000.

▲ Okla., Duncan—PLANT—Skelly Oil Co., Skelly Bldg., Tulsa, doubling capacity of velma gasoline plant, $1,000,000.

Tex., Dallas—STORAGE—Nieman-Marcus, Main and Ervay Sts., 1 story 98,000 sq. ft. rein.-con. storage and service at 2620 Haskell St., $702,560.

▲ Tex., Fort Worth—PLANT—Castor Oil Products, Inc., c/o Arthur G. Blair, 145 Alexander St., Yonkers, N. Y., castor oil plant. $2,000,000.

▲ Wis., Janesville—GENERATING PLANT—Wisconsin Power & Light Co., 222 W. Washington Ave., Madison steam generating plant, $5,000,000. Sargent & Lundy, 140 S. Dearborn St., Chicago, 3, Ill., consult. engrs.

▲ Wyo., Landers — PLANT — Continental Sulphur and Phosphate c/o C. Andrade, III, Tower Petroleum Bldg., Dallas, Tex., phosphate plant, $4,000,000; sulphur plant, $2,000,000.

▲ Wis., Milwaukee—WAREHOUSE—Joseph T. Ryerson & Son, Inc., 320 S. 19 St., Zone 4, warehouse for storing steel. $2,000,000.

▲ B. C., Nanaimo—PLANT ADDN.—H. R. MacMillan Export Co. Ltd., 837 W. Hastings St., Vancouver, unbleached sulphate plant addn., $16,000,000. CD 3/4/49.

UNCLASSIFIED

Ind., Indianapolis — SERVICE CENTER — Indianapolis Power & Light Co., 17 N. Meridian St., service center on 14 acre tract at E. 30 and Lancaster Sts. $725,000. CD 1/30/47 under Industrial bldgs.

▲ Tenn., Clarksville—NATURAL GAS SYSTEM—City, Clarksville natural gas sys. $2,000,000. Bernard & Burk, Triad Bdg., Baton Rouge, La. consult. engrs. CD 10/28-47.

▲West Virginia—STORAGE, TRANSMISSION FACILITIES—United Fuel Gas Co., Lipscomb Bldg., Charleston, addns. to natural gas storage and transmission facilities in Kanawha and Putnam Counties, $4,775,830. CD 12/14/49.

▲ Alta., Edmonton—BOMBING, GUNNERY RANGE—Defence Const. Ltd., Ottawa, Ont. construct bombing and gunnery range stretching across Northern Alberta and Saskatchewan for new R. C. A. F. development, where the latest air weapons will be tested. incl. construction of runways, operations bldg. and barrack blocks. Approx. $14,000,000.

CONSTRUCTION REPORTS-Second Section

NEW ENGLAND

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
STREETS AND ROADS
May 15, Massachusetts

BIDS ASKED—BUILDINGS

Mass., Dighton—SCHOOL—B.A. 5/18—Town, John Bolger, chn., 1 story, brick, steel, concrete school, incl. athletic field, etc. $550,000. CD 11/24/50.

LOW BIDDERS—BUILDINGS

White Constr. Co., 18 Tremont St., Boston, Mass. Low Bidder. $999,800. 105 units HOUSING, Proj. PHA 16-1, CHELSEA, MASS. Chelsea Housing Auth., City Hall, Chelsea, Mass. Bids Apr. 24. CD 3/22.

▲ **State, Dpt. Mental Health**, 100 Nashua St., Boston, Mass. rejected bids Mar. 22 M 201, Contr. 1, bldg. for Psychotic Children, Metropolitan State Hospital, WALTHAM, MASS. L. B. $1,181,760 Alternate A Minus $3,460. $1,174,760, Alternate B minus $100. Will readvertise. CD 3/29.

CONTRACTS—HEAVY CONSTRUCTION

▲ **Merritt-Chapman & Scott Corp.**, 79 Milk St., Boston, Mass. Contract Awarded. $1,499,017. substructure multiple span steel truss bridge across Merrick River UI 62 (8). Contr. B, Amesbury and Newburyport, MASSACHUSETTS. Commonwealth of Mass., Dpt. Pub. Wks., 100 Nashua St., Boston, Mass. CD 4/16, under LB.

▲ **Westcott Constr. Co.**, 52 N. Washington St., North Attleboro, Mass. Contract Awarded. $1,348,000. sewage disposal plant, EAST PROVIDENCE, R. I. Town, Town Hall, East Providence, R. I. Bids Apr. 2. CD 4/19, under LB.

MIDDLE ATLANTIC

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
May 23, Delaware
STREETS AND ROADS
May 15, Maryland
May 16, New York
May 23, Delaware

BIDS ASKED—BUILDINGS

N. J., Trenton—HOUSING—B.A. About 5/15—Trenton Housing Auth., 875 New Willow St., 4 three-story brick, structural steel apartments incl. 81 units, Frazer St. $965,000. Plans deposit $25. Mickle-wright & Mountford, 72 Ewing St., archts. CD 5/10/50.

N. J., Mount Holly—HOSPITAL—B.A. 5/15—Burlington County Hospital, Mount Holly, hospital addns., alterations, $725,000, George Von Uffel Jr., 30 Warwick Rd., Haddonfield, archt. CD 12/1/49.

▲ **Md., Baltimore**—SCHOOL—B.A. 5/16—City, R. E. L. Williams, bldg. constr. engr., 410 Municipal Bldg., Zone 2, 3 story, brick, concrete block, cinder block, steel Booker T. Washington Junior High School addn., alterations, incl. 2 gymnasiums, power plant. $1,600,000. Plans deposit $100. Tyler, Ketcham & Myers, 513 Park Ave., archts. Crout, Snyder & Crandall, 500 American National Bldg., struct. engrs. James Posey, 10 E. Pleasant St., mech. engr. CD 11/17/48.

▲ **N. J., Hillside**—SCHOOL—B.A. 5/17—Pingry School, 87 Parker St., Elizabeth, school, North Ave. and Lake Ursino. $1,000,000. CD 6/16.

Del., Wilmington—SYNOGOGUE, etc. — Bids Asked — Congregation Beth Sholom, c/o Aaron Finger, du Pont Bldg., synagogue and school, $520,000. Maurice Courland, 2 W. 89 St., New York, N. Y., archts. Bids Dec. 26 rejected. CD 12/20.

LOW BIDDERS—HEAVY CONSTRUCTION

▲ **Delham Constr. Co. Inc.**, 6010 15 Ave., Brooklyn 19, N. Y. Low Bidder. $1,381,547. Sewers, 166 and Murray Sts., 17, 160, 21, 26, 27, 28 and 29 Aves., Willets Point Blvd.***Andrew Catapano & Co., 88-36 77 Ave., Glendale, N. Y., $630,550, Cross Island Parkway, Service Roadway, Willets Point Blvd. etc. ***Albert Clemente, 68-54 Alderton St., Forest Hills, N. Y., $62,635, 27 and 26 Aves., 25 Rd., 125 and 126 Sts., in Queens Boro, NEW YORK. President Queens Boro, 120-55 Queens Blvd., Kew Gardens, 15, N. Y. Bids Apr. 27. CD 4/9.

▲ **Peerless Constr. Co.**, 280 Madison Ave., New York 61, N. Y. Low Bidder. $1,258,000. Contr. A, structures and equip.***Forest Electric Corp., 630 Ninth Ave., New York 19, N. Y., $113,368, Contr. B, electrical equip. for work at Port Richmond Sewage Treatment Works, PORT RICHMOND, N. Y. Dpt. P. Wks., Municipal Bldg., New York 7, N. Y. Bids Apr. 25. CD 3/22.

LOW BIDDERS—BUILDINGS

▲ **Depot Constr. Corp.**, 119 W. 57 St., New York 19, N. Y. Low Bidder, $9,432,000, base bid, $5,506,000, Alternates, Contr. 1, demolition, general constr. work; elevators and dumbwaiters, metal equip. top soiling and planting***Far Plumbing Co., 2018 Crotona Parkway, New York 60, N. Y. $1,066,666, base bid. $599,999, Alternates Contr. 2, plumbing and kitchen equip.***Heating Maintenance Corp. of New York, 220 E. 138 St., New York 51, N. Y., $1,116,260, base bid, $759,660, alternates, Contr. 3, heating, ventilating, air-conditioning, refrigerator work***John G. Hellman Co., Inc., 391 Fulton St., Brooklyn 1, N. Y., $838,524, base bid, $590,-225, alternates, Contr. 4, electrical and lighting fixtures for the NURSES' SCHOOL and RESIDENCE, at Bellevue Hospital, NEW YORK, N. Y. Dpt. P. Wks., Municipal Bldg., 7, N. Y. Bids Apr. 18. CD 4/2.

▲ **T G K Constr. Co., Inc.**, 55 W. 42 st., New York 18, N. Y. Low Bidder, $1,554,500, P.S. 109, Popham Ave. and Palisade Pl. (Spec. Nos. 10, 11, 12 and 13 of 1951 and Amendment No. 1), NEW YORK, N. Y. Supt. School Bldgs., Design & Construction, 49 Flatbush Ave. exten., Brooklyn 1, N. Y. Bids Apr. 24. CD 4/2.

▲ † **Christensen & Neilsen**, 114 Union St., Schenectady, N. Y. Low Bidder, $1,272,030, Items 1-8***Planet Constr. Corp., 11 W. 42 St., New York 18, N. Y., $390,000, Item 9, for engineer base maintenance SHOP and reconstruction 2 burned out WAREHOUSE units at Schenectady General Depot, No. Eng. 30-075-51-608, VOORHEESVILLE, N. Y. U. S. Eng., 80 Lafayette St., New York 13, N. Y. Bids about Apr. 26. CD 4/6.

▲ † **Daniel J. Cronin, Inc.**, 717 S. Grange Ave., Newark, N. J. Low Bidder. $6,580,000, high pressure BLOWER and TEST wing, Turbine Laboratory, TRENTON, N. J. Dpt. Navy, Navy Bldg., Wash., D. C. Bids Apr. 25. CD 4/12.

CONTRACTS—HEAVY CONSTRUCTION

† **James H. Merritt & Co.**, 1113 34 Ave., Long Island City, 6, N. Y. Contract Awarded. $890,943, repairs for maintenance and storm damage, Naval Industrial and Reserve Shipyards, PORT NEWARK and KEARNY, N. J. P. Wks. Office, Third Naval Dist., 90 Church St., NEW YORK, N. Y. Bids Apr. 4, awarded Apr. 12.

▲ **John H. Swanger, Inc.**, Lancaster, Pa., Contract Awarded, $1,005,271. 17,798 ft. construction of divided highway, incl. plate girder and an I-beam bridge, sect. of Allentown by-pass, Route U. S. 22, Upper Macungie and S. Whitehall Twps Lehigh Co., PENNSYLVANIA. State Hy. & Bridge Auth., 506 N. Office Bldg., Harrisburg, Pa. Bids Apr. 20, Awarded Apr. 27. CD 4/24, under LB.

▲ **Wilmouth Paving Co.**, First and P. Sts. S. E., Wash., D. C. Contract Awarded. $1,111,752. Contr. M-455-6-315, grading, drainage, surf. 2.036 mi. divided hy. along Georgia Ave., State Rte. 97, Montgomery Co., MARYLAND. State Rds. Comm., 108 Lexington St., Baltimore 2, Md. CD 1/29, under LB.

CONTRACTS—BUILDINGS

▲ **Brigham Park Apartments**, c/o Julius Fishkind, archt., 161-19 Jamaica Ave., Jamaica, N. Y. Owner builds. $12,000,000. Co-operative apartment, 21 six story bldgs. on tract bounded by Knapp St., Avenue U, Avenue W and Gerritsen Ave. BROOKLYN, N. Y.

▲ **Beech Hill Gardens**, c/o Benjamin Braunstein, archt., 163-18 Jamaica Ave., Jamaica, N. Y. Owner Builds. $8,000,000. Co-operative APARTMENT, for 816 families on 40 acre tract bounded by Horace Harding Blvd., Marathon Parkway, North Hills County Club and Douglaston Parkway. DOUGLASTON, N. Y. CD 3/29.

▲ **Sam Berger**, c/o Edwin Kline & A. H. Salkowitz, archts. 37-60 82 St., Jackson Heights, N. Y. $3,000,-000. Owner builds 100 one family HOUSES on site bounded by Bayview Ave. Byron Lane and Emerson Dr., GREAT NECK, N. Y.

▲ **Turner Constr. Co.**, 420 Lexington Ave., New York, N. Y. Contract Awarded. $3,500,000. FACTORY and OFFICE, HEMPSTEAD, N. Y. Armour & Co., Union Stock Yards, Chicago 9, Ill. Alexander D. Crosett & Assoc., 27 Williams St., New York, N. Y., archts. Awarded Apr. 2.

William Brafman & Co., c/o Erwin Gerber, archt., 1180 Raymond Blvd., Newark, N. J. Owner builds. Approx. $900,000. APARTMENT for 116 families, Merrick Rd. and 173 St. JAMAICA, N. Y.

▲ **Depot Constr. Corp.**, 119 W. 57 St., New York 19, N. Y. Contract Awarded. $1,249,000. P. S. 112 SCHOOL, Crescent St. and 37 Ave., LONG ISLAND CITY, N. Y. Supt. School Bldgs., Design & Consstruction, 449 Flatbush Ave. exten., Brooklyn 1, N. Y. Bids Apr. 3, awarded Apr. 12. CD 4/10, under LB.

▲ **Bethlenem Steel Co.**, 25 Broadway, New York 4, N. Y. Contract Awarded. $2,585,100. structural steel for 74th St. POWER PLANT, NEW YORK, N. Y. Bd. Transportation, 370 Jay St., Brooklyn 1, N. Y. Bids Apr. 6. CD 4/19, under LB.

▲ **Cottage Homes**, c/o Alwin Cassens, Jr., archt., 116-55 Queens Blvd., Forest Hills, N. Y. Owner Builds. $1,000,000. 125 one family HOUSES on tract at Brower Ave. and Benjamin Rd., OCEANSIDE, N. Y.

▲ **Syosett Ranch Village**, c/o A. H. Salkowitz, archt., 37-60 82 St., Jackson Heights, N. Y. Owner Builds. $1,000,000. 100 one family HOUSES, Cold Spring Rd., SYOSETT, N. Y.

▲ **Hewlett Park Homes**, c/o Alwin Cassens, Jr., archt., 116-55 Queens Blvd., Forest Hills, N. Y. Owner Builds. $4,000,000. 230 HOUSES on 74 acre tract at Mill Rd. and Rosedale Ave., VALLEY STREAM, N. Y.

▲ **Wantagh Park Homes**, c/o Stanley H. Klein, archt., 89-31 161 St., Jamaica, N. Y. Owner Builds. $4,-000,000. 400 one family HOUSES on 80 acre tract on Jerusalem and Washington Aves., WANTAGH, N. Y.

▲ **Olden Development Corp.**, Trenton Trust Bldg., Trenton, N. J. Owner Builds. $1,300,000. 127 ranch type frame, brick HOMES, S. Olden, Finley and Norton Aves., HAMILTON TWP. N. J. Trenton Eng. Co., 143 E. State St., Trenton, engr. American Homes, Inc., S. Aubrey and Walnut Sts., Allentown, Pa., archt.

▲ **Luck Homes, Inc.**, c/o McMurray & Chirgotis, archts., 968 Stuyvesant Ave., Union, N. J. Owner Builds. $4,000,000. 220 one-family HOUSES on 62 acre tract, No. Fifth Ave. and Mill Brook, RARITAN TWP., N. J.

▲ **Allen B. Holmes, Inc.**, 3001 Druid Park Dr., Baltimore, Md. Separate Contracts. $6,000,000, RESIDENTIAL DEVELOPMENT, incl. 503 units, NEW CASTLE, DEL. Julius Myerbert, 302 Park Ave., Baltimore, Md., archt.

SOUTH

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
May 15, South Carolina May 22, 23, Virginia
May 30, Louisiana
STREETS AND ROADS
May 15, South Carolina May 22, 23, Virginia
May 16, Louisiana May 30, Louisiana

Ga., Macon—B.A. 5/15—Bibb Co., c/o Fenley Rythen, co. engr., Court House, laying curb, gutter on various streets, $95,000. CD 7/29/46.

BIDS ASKED—BUILDINGS

▲ **Ga., Columbus**—PLANT—B. A. 5/16—Wells Dairies Co-operative, 2320-30 Wynnton Rd., dairy plant. $1,500,000. E. Oren Smith, 1236 Wildwood Ave., Columbus, archt. CD 4/20.

▲ **Fla., Orlando**—SCHOOL—B. A. 5/18—Orange Co. Bd. P. Instruction, Orlando, West Orlando Senior High School, $1,000,000. Geo. H. Spohn, Winter Park, Fla., and F. Earl De Loe, 6 W. Church St., Orlando, Fla., archt. Extended date. CD 2/29.

LOW BIDDERS—HEAVY CONSTRUCTION

Keller Constr. Corp., 7900 Palm St., New Orleans, La. Low Bidder. $940,000. Underpass on Canal Ave. at Homedale Ave., NEW ORLEANS, LA. New Orleans R. R. Terminal Bd., City Hall Annex, New Orleans, La. Bids Apr. 26. CD 3/28.

▲ **Williams Brothers Corp.**, 6006 Humble Rd., Houston, Tex. and Davis & Co., Commerce Bldg., Houston, Tex. Contract Awarded. $9,850,000. 160 mi. section 30 in. welded joint natural gas pipe line, Kosciusko, Miss. to Florence, Ala. MISSISSIPPI-ALABAMA. Texas Eastern Transmission Co., 1003 Esperson Bldg., Houston, Tex.

▲ **Foster Wheeler Co.**, Union Central Bldg., Cincinnati, O. Contract Awarded. $1,100,000. 2 BOILERS for power plant, Ford, KENTUCKY. East Kentucky Rural Electrification Admin., Winchester, Ky. Awarded Apr. 15.

LOW BIDDERS—BUILDINGS

▲ **Ray M. Lee Co.**, 1004 Edgewood Ave. N. E., Atlanta, Ga. Low Bidder. $974,375. MEN'S DORMITORY; $1,-192,913, GIRL'S DORMITORY at University of Georgia, ATHENS, GA. Bd. Regents, University System of Georgia, 120 Ivy St. S. E., Atlanta, Ga. Bids Apr. 26. CD 4/16.

CONTRACTS—BUILDINGS

L. A. Warlick Contg. Co., 747 E. 11 St., Chattanooga, Tenn. Contract Awarded, $967,500. HOSPITAL, CLEVELAND, TENN. Bradley Co., Cleveland, Tenn. Bids Mar. 8. CD 3/19, under LB.

MIDDLE WEST

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
May 21, Wisconsin
STREETS AND ROADS
May 21, Wisconsin

BIDS ASKED—BUILDINGS

▲ **Ill., Chicago**—APARTMENT—B.A. 5/15—New York Life Insurance Co., 51 Madison Ave., New York, 18, N. Y., 13 apartments incl. 1,400 housing units, 25 and 31 Sts., S. Parkway to Lake Michigan. $18,000,-000. Skidmore, Owings & Merrill, 100 W. Monroe St., Zone 3, archts. 8/18/49.

▲ **Ill., Tinley Park**—HOSPITAL—B.A. 5/15—Illinois Public Welfare Dpt., mental hospital at Harlem Ave. and 183 St. $20,000,000. Skidmore, Owings & Merrill, 100 W. Monroe St., Chicago, Zone 3, Ill., archts. CD 2/2/50.

▲ **Ind., South Bend**—LIBERAL and FINE ARTS—B.A. 5/15—Notre Dame University, Campus, South Bend, O'Shaughnessy liberal and fine arts bldg. $1,500,000. Ellerbe & Co., First National Bank Bldg., St. Paul, Minn., archt. CD 4/20/50.

LOW BIDDERS—HEAVY CONSTRUCTION

L. W. Lamb, Holland, Mich. Low Bidder. $825,538, est. $700,000. concrete, steel bridge over Muskegon

River on M 37, Proj. FBI of 62-12-1, CI (F 268 4), Newago Co., MICHIGAN. State Hy. Comn., Lansing 13, Mich. Bids Apr. 19. CD 4/3.

LOW BIDDERS—BUILDINGS

▲ Western Reserve Building Co., Warren, O. Low Bidder. $1,014,872, est. $1,000,000. HIGH SCHOOL, HUBBARD, O. Bd. Educ., Hubbard, O. Bids Apr. 26. CD 4/11.

CONTRACTS—HEAVY CONSTRUCTION

▲ Welsbach Corp., 4622 Calumet Ave., Hammond, Ind. Contract Awarded. $1,569,980. sewage disposal plant, treatment plant, Div. C, BENTON HARBOR and ST. JOSEPH, MICH. Cities Benton Harbor and St. Joseph, Mich. CD 4/25, under LB.

CONTRACTS—BUILDINGS

▲ James McHugh Constr. Co., 6449 S. Park Ave., Chicago, 37, Ill., Contract Awarded, $1,334,750. general constr. student RESIDENCE HALL and $959,200. APARTMENT, at University of Illinois, CHICAGO, ILL. University of Illinois, 809 S. Marshfield St., Chicago, 7, Ill. Bids Mar. 6. CD 3/13, under LB.

▲ Robin Constr. Co., 1313 N. Wells St., Chicago 10, Ill. Contract Awarded, $1,575,000. 15% unit Harrison HOUSING. Grinnel and Folker Sts., PEORIA, ILL. Peoria Housing Auth., Peoria, Ill. Bids Apr. 11, awarded Apr. 23. CD 3/28.

▲ T. S. Willis, 326 Hayes Park, Janesville, Wis. Contract Awarded. Approx. $2,000,000. 1 story 270x575 ft. concrete, steel, glass FACTORY addn., JANESVILLE, WIS. Parker Pen Co., 219 Court St., Janesville, Wis. A. W. Kerr & Assocs., 407 S. Dearborn St., Chicago, Ill., engrs.

WEST of MISSISSIPPI

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
May 15, Iowa
STREETS AND ROADS
May 15, Iowa May 18, Minnesota

▲† Montana—B.A. 5/22—Bureau Reclamation, Hungry Horse Gov't Camp, Columbia Falls, excav., earthwork, 47 mi. long Forest Service road on west side of Hungry Horse reservoir. Bids 4/3 rejected. L. B. $2,348,213. CD 4/10 under L. B.

BIDS ASKED—BUILDINGS

Minn., St. Louis Park—SCHOOL—B.A. 5/17—Bd. Educ., V. S. Formo clk., 2 story, Park Knoll Grade School, $500,000. Plans deposit $25, Haxby, Bissell & Belair, 1111 Nicollet Ave., Minneapolis, archts.

Tex., Galveston—HOSPITAL—B.A. 5/17—Bd. Regents University of Texas, 205 Main Bldg., Austin, 4 story Ziegler Tuberculosis hospital unit, $975,000. Plans deposit $40. Kenneth Franzheim, 2402 Crawford St., Houston, archt. CD 1/3/50.

▲† Tex., Amarillo—PLANT—B.A. 5/18—U. S. Atomic Energy Comn., Los Alamos, N. M., addnl. construction for Atomic Energy production plant (at Pantex area). $2,500,000.

Minn., Mankato—SCHOOL—B. A. 5/17—State, Dpt. Admin., P. T. Peterson, dir. Purch., 19 State Capitol, St. Paul, classroom addn., State Teachers College, $800,000. Plans deposit $25, McEnary & Krafft, 1110 McKnight Bldg., Minneapolis, archts. Bids 10/26 rejected. CD 11/16 under LB.

Tex., Orange—HOUSING—B.A. 5/22—Orange Housing Auth., Orange, 100 brick, hollow tile housing units for Negroes, concrete slab fdn., $800,000. Plans deposit $50. Watkins, Fitch & Assoc., 3101 San Jacinto St., Houston, archts. CD 10/12/50.

Tex., Corsicana—DWELLINGS—Bids Asked—Corsicana Housing Auth., Corsicana, 86 dwellings units for total 29 separate bldgs., concrete slab fdn., brick hollow tile walls constr., Tex. 33-2, $688,000. Plans deposit $50. CD 10/5/49.

Tex., Houston—HEADQUARTERS—Bids Asked—The Lummus Co., M. Esperson Bldg., headquarters bldg., $500,000. Walter Kidde Engineers Southwest, Inc., 4101 San Jacinto St., engrs. CD 4/9.

Tex., McAllen—MERCANTILE—Bids Asked—Hackberry Realty Co. Inc., McAllen, 2 story 65,000 sq. ft. mercantile. Approx. $650,000. Plans deposit $25. Cowell & Neuhaus, 2303 LaBranch St., Houston. George L. Dahl, 1920½ Main St., Dallas, archts. CD 1/2.

LOW BIDDERS—HEAVY CONSTRUCTION

▲ Hoak Constr. Co., 621 63 St., Des Moines, Ia. Low Bidder. $1,197,063, est. $1,000,000. Sect. S. 388 mi rural distr. lines, 21.14 mi. conversions, Crawford, Dent, Gasconade, Maries, Phelps, Pulaski, Texas and Wright Counties and Sect. V. 371.7 mi. rural distr. lines and 11.71 mi. conversions, Dent, Phelps, Texas and Shannon Counties, MISSOURI, Intercounty Electric Co-operative Assn., Licking, Mo. Bids Apr. 20. CD 4/4.

▲† Texas Constr. Co., P. O. Box 1384, Dallas, Tex. Low Bidder. $1,578,732, est. $1,386,548. Construct outlet works at Garza-Little Elm Dam and Reservoir, near Wylie, CIVENG 41-443-51-31, TEXAS, U. S. Eng., 1127 Texas and Pacific Bldg., Fort Worth, Tex. CD 3/22.

▲† Texas Constr. Co., Box 1384, Dallas, Tex. Low Bidder. $2,777,240. Converting to locks, Colorado River Flood Gates, Inv. No. CIVENG 41-243-51-82, at Matagorda, TEXAS. U. S. Eng., 606 Santa Fe Bldg., Galveston, Tex. Bids Apr. 24. CD 4/2.

LOW BIDDERS—BUILDINGS

▲ Fowler-Vernath Constr. Co., 303 S. First Ave. E., Duluth, Minn. Low Bidder. $2,777,993. 206 DWELLINGS, Greenhaven housing, HIBBING, MINN. Greenhaven, Inc., R. T. Sprague, pres., Bd. Directors, Hibbing, Minn. Bids Apr. 20. CD 4/4.

▲ A. H. Newmann & Bros., 514 Hubbell Bldg., Des Moines, Ia., Low Bidder, $1,428,500, general constr.; W. L. Dwyer, 533 6 St., Des Moines, Ia., $453,877, plumbing, heating, and ventilating, WOMEN'S DORMITORIES, DES MOINES, IA. Drake University, 25 and University Sts., Des Moines, Ia. Bids Apr. 7. CD 4/4.

CONTRACTS—HEAVY CONSTRUCTION

Central States Constr. Co., Crosby, Minn. Contract Awarded. $939,144. c. conc. 16 mi. between Euclid and Warren, Marshall Co., MINNESOTA. State Hy. Dpt., 1246 University Ave., St. Paul, Minn. CD 3/28, under LB.

▲† Johnson, Drake & Piper, Inc., 1138 Baker Bldg., Minneapolis, Minn. Contract Awarded. $1,087,031. constr. Orrell Dam on Otter Tail River, MINNESOTA. U. S. Eng., 1217 U. S. P. O. and Custom House, St. Paul 1, Minn. CD 4/18, under LB.

CONTRACTS—BUILDINGS

Hagstrom Constr. Co., 1547 Selby Ave., St. Paul, Minn. Contract Awarded. $978,030. general constr. St. Joseph's HOSPITAL, BRAINERD, MINN. Benedictine Sisters Benevolent Assn., Villa Sancta Scholastica, Kenwood Ave., Duluth, Minn. CD 3/28, under LB.

▲ D'Arcy Leck Constr. Co., 2838 Stevens Ave., Minneapolis, Minn. Contract Awarded. $1,043,361. general constr. Secondary SCHOOL, LABORATORY and GYMNSIUM at College of Education, MINNEAPOLIS, MINN. University of Minnesota, R. S. Callaway, purch. agt., 323 Admin. Bldg., Main Campus, Minneapolis, Minn. CD 4/19, under LB.

▲ Brown & Root, Inc., Box 3, Houston, Tex., Contract Awarded. $2,750,000. chlorine and caustic PLANT expansion, HOUSTON, TEX. Diamond Alkali Co., 1006 Main St., Houston, Tex. CD 11/18/49.

▲ Brown & Root, Inc., Box 3, Houston, Tex. Contract Awarded. Approx. $5,750,000. CHEMICAL PLANT, PAMPA, TEX. Celanese Corp. of America, H. Blancke, pres., 180 Madison Ave., New York, N. Y. CD 4/26.

Leslie Crockett, 112 Academy Dr., Austin, Tex., Contract Awarded, $877,000. est. $850,000. 76 DWELLING units in 17 bldgs. and administration bldg., Tex. 30-1 and 30-2, TEMPLE, TEX. Temple Housing Auth., c/o Wm. Wilhite, Dir., Temple, Tex. Bids April 12. Awarded April 16. CD 4/20, under LB.

▲ Martinson Constr. Co., 5400 Colorado Blvd., Denver, Colo. Contract Awarded. Approx. $1,500,000, service parts depot WAREHOUSE and general sales district OFFICE, DENVER, COLO. International Harvester Co., 180 N. Michigan Ave., Chicago, Ill.

FAR WEST

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
May 23, California
STREETS AND ROADS
May 23, 24, California

▲† Wash., Spokane—BARRACKS, etc.—B.A. 5/22—U. S. Eng., 19 E. Poplar St., Walla Walla., barracks, mess facilities bldg., and utilities at Fairchild Air Force Base ENG 45-164-51-4, $1,200,000. Plans deposit $25. Naramore, Bain, Brady & Johanson, 904 7 Ave., Seattle, archts. CD 5/1.

▲ Calif., Los Angeles—TRANSIT SHEDS—B.A. 5/23—Los Angeles Harbor Dpt., City Hall, Los Angeles, transit shed facilities at Berths 196 and 197 $3,000,000. Plans deposit $25. E. C. Earl, engr. Extended date. CD 4/3.

LOW BIDDERS—HEAVY CONSTRUCTION

▲ Griffith Co., 1060 S. Broadway, Los Angeles, Calif., Low Bidder, $1,429,146, grading, paving, grade separation structures 2.5 mi. Los Angeles River Freeway in Long Beach, Los Angeles Co.; Anderson Co., P.O. Box 1190, Visalia, Calif., $74,675, plant mix surf. 15 mi. Main St. in El Centro, CALIFORNIA. State Div. Hys., 120 S. Spring St., Los Angeles, Calif. CD 4/3.

† Daley Corp., Box 67, North Station, San Diego, Calif. Low Bidder. $904,680. Runway exten. for jet operation, MIRAMAR, CALIF. Dpt. Navy, Eleventh Dist., 1220 Pacific Hy., San Diego, Calif. Bids Apr. 24. CD 4/12.

LOW BIDDERS—BUILDINGS

▲† U. S. Eng., 4735 E. Marginal Way, Seattle 4, Wash. rejected bids Apr. 10, additional bldgs., rehabilitation of existing bldgs. and utilities, Eng. 45-108-51-125, NORTH RICHLAND, WASH. L. B. $2,376,951. Will re-advertise. CD 4/16.

▲ Leland McArthur & Assoc., 900 S. 5 St., Las Vegas, Nev. Low Bidder, $2,700,000, construct, manage and finance, 300 APARTMENT UNITS at Naval Air Base, WHIDBEY ISLAND, WASH. P. Wks. Div., Thirteenth Naval Dist., 1611 W. Wheeler St., Seattle, Wash. Bids Apr. 27. CD 3/21.

CONTRACTS—HEAVY CONSTRUCTION

▲ California-Oregon Power Co., Medford, Ore. Force Account. $2,200,000. dams on Fish Creek, Slide Creek and at Soda Springs, Douglas Co. OREGON. A. C. Cummins, Medford, engr. CD 2/26/47.

▲ United Concrete Pipe Corp., Box 425, Baldwin Park, Calif., Contract Awarded, $1,129,744, water mains, appurtenances, under LS 536, OAKLAND, CALIF. East Bay Municipal Utility Dist., 512 16 St., Oakland, Calif. Bids Mar. 23, awarded Apr. 25. CD 4/2 under LB.

CONTRACTS—BUILDINGS

▲† D. M. Sweeney & Triangle Building Co., Idaho Falls, Idaho. Contract Awarded. $340,129, est. $358,840. Construct 5 BUILDINGS in Area "D", incl. 1 story air-operations bldg.; 1 story fire and crash truck station; 1 story meteorological bldg.; 1 story cafeteria and 1 story technical laundry***Cahill-Mooney Constr. Co., 1220 E. Front St., Butte, Mont. $2,467,550, est. $2,516,000, construct 10 BUILDINGS in Area "E" incl. 1 story civilian cafeteria; 1 story quartermaster office and warehouse; 1 story utilities shop; 1 story ordnance maintenance shop; 1 story photographic laboratory; 1 story transportation bldg.; 1 story administration bldg.; 1 story officers' mess and two 1 story warehouses***Christiansen Bros., 209 W. 13 South St., Salt Lake City, Utah, $912,044 est. $1,038,471. Constructing combined OPERATIONS bldgs. in Area "E" incl. 1 story combined operations bldg.; 1 story animal shed and 1 story goat and sheep shed, in Dugway Proving Ground, TOOELE, UTAH. U. S. Eng., 74 New Montgomery St., San Francisco, Calif. Grand total $3,719,823. Bids April 19. CD 3/15.

▲ Stone & Webster, 601 W. 5 St., Los Angeles, Calif. Contract Awarded. Approx. $3,500,000. Etiwanda steam-electric generating STATION, FONTANA, CALIF. The Southern California Edison Co., 601 W. 5 St., Los Angeles, Calif. CD 10/24.

▲ Arnold Constr. Co., 9621½ S. Atlantic St., Los Angeles, Calif. Contract Awarded. Approx. $2,032,200. 255 frame, stucco DWELLINGS, Alburtis Ave., Anaheim-Telegraph Rd., SANTA FE SPRINGS, CALIF. Birmingham Development Co., 9621½ S. Atlantic St., Los Angeles, Calif. Riley & Levanas, 11544 E. Whittier Blvd., Whittier, Calif., archts.

ALASKA

LOW BIDDERS—BUILDINGS

† J. H. Pomeroy & Co., Inc., 333 Montgomery St., San Francisco, Calif. Low Bidder. $919,023, est. $827,667. FIELD MAINTENANCE SHOP, ORDNANCE, Inv. No. S95-507-51-90, FORT RICHARDSON, ALASKA. U. S. Eng., New Washington Hotel, Seattle 1, Wash. Bids Apr. 26. CD 4/4.

CANADA

BIDS ASKED—HEAVY CONSTRUCTION
STATE HIGHWAY LETTINGS
BRIDGES
June 4, British Columbia

BIDS ASKED—BUILDINGS

▲ Que., Ville LaSalle—STORAGE—B.A. 5/15—M. P. McAndrew, engr., Defence Constr. Ltd., 1247 GGuy St., Montreal, Que., four 200x600 ft., 1 story, concrete block storage bldgs. at Naval Stores Development. Approx. $3,500,000. Plans deposit $100. CD 1/26.

LOW BIDDERS—HEAVY CONSTRUCTION

Robertson Constr. & Eng. Co., Ltd., 512 Clifton Ave., Niagara Falls, Ont. Low Bidder, Approx. $989,000. 24 m.g. rein.-con. reservoir at Carlington Heights, (less excavation), OTTAWA, ONT. City, City Hall, Ottawa, Ont. CD 8/24/49.

CONTRACTS—HEAVY CONSTRUCTION

▲ Concrete Products (Newfoundland) Ltd., Mount Pearl St., St. John's, Newfoundland, Contract Awarded, $1,000,000, exten., strengthening runway, other surface work at airport, GANDER, NEWFOUNDLAND. Dpt. Transport, Hunter Bldg., Ottawa, Ont. Bids Mar. 20, awarded Apr. 28. CD 3/9.

▲ Geo. Hardy Ltd., 163 Wicksteed Ave., Leaside, Ont., Contract Awarded, Approx. $3,832,000, central supply depot for R.C.A.F., DOWNSVIEW, ONT. Defence Constr. Ltd., 441 Queen's Quay W., Toronto, Ont. S. M. Connolly, c/o owner, engr.

▲ R. E. Stewart Constr. Corp., 263 Wellington St. S., Sherbrooke, Que. Contract Awarded. Approx. $1,169,000, barrack block etc. at R.C.A.F. Station, BAGOTVILLE, QUE. Defence Constr. Ltd., 1247 Guy St., Montreal, Que. Bids Apr. 17. CD 4/5.

CONTRACTS—BUILDINGS

▲ W. C. Wells Constr. Co. Ltd., Edmonton, Alta. Contract Awarded, $2,000,000, 25 BUILDINGS, incl. barracks, store house and other shelters, WAINWRIGHT, ALTA. Defence Constr. Ltd., 400 Kensington Bldg., Winnipeg, Man. Bids Apr. 10, awarded Apr. 24. CD 4/5.

▲ Harron & McCance Ltd., 53 Glencairn Ave., Toronto, Ont. Owner Builds. $1,000,000. HOUSING DEVELOPMENT, incl. 100 to 150 houses, in Laidlaw subdivision on Hy. 7, SARNIA, ONT.

(Proposal Advertisements see pp. 104 to 106)

CONSTRUCTION REPORTS—Third Section

Jet engine assembly plant—Thorgersen-Ericksen Co., Chicago, Ill., has been awarded a $32,000,000 contract to build a jet engine assembly plant at Willow Springs, Cook County, Ill., by the Buick Division, General Motors Corp., Detroit, Mich. Argonaut Realty Co., Chicago, Ill., is architect.

Danherst development—The Danherst Corp., Langhorne, Pa., plans to construct a $35,000,000 housing development, shopping center, schools, community buildings, churches, waterworks and sewerage at Morrisville, Pa., near Fairless Steel Works. Sewart H. Mott, Washington, D. C., is consulting engineer. Richard Tully, Columbus, O., is architect.

College buildings—George A. Fuller Co., of New York, N. Y. will construct a group of college buildings at Purchase, N. Y., for the Maanhatanveille College of the Sacred Heart, New York, N. Y. Estimated cost is about $14,000,000. Eggers & Higgins, New York, are architects.

Schools—City of Lincoln, Neb., voted $6,000,000 bonds to construct new schools.

Catalytic cracking plant—Phillips Petroleum Co., Bartlesville, Okla., awarded contract to Fluor Corp., of Los Angeles, Calif. to construct a $10,000,000 catalytic cracking plant, at refinery at Woods Cross, Utah.

Mental hospital—California State Division Architecture, Sacramento, Calif., will open bids June 12, for $8,000,000 Maxium Security Institution at Atascadero, Calif., for the Department of Mental Hygiene, Albert Criz and Paul R. Williams, Los Angeles, are architects.

Hotel—Irving Kupnis, Miami Beach, Fla., plans a $4,000,000 hotel at Miami.

Runway and reconstructing North Field—J. Dellinger, Inc., Corpus Christi, Bitulithic Co., Dallas, and Dean Word, New Braunfels, have been awarded a contract at $4,190,737 for constructing runway and reconditioning North Field, Kingsville, Tex. the Public Works Office, Department of the Navy, Corpus Christi, let contract.

Group of buildings—Atomic Energy Commission, Los Alamos, N. M. will take bids June 25, for $3,500,000 to $4,000,000 group of 134 buildings Project E, at Los Alamos.

Hospital—City of Tampa, Fla. plans an addition to Tampa City Hospital. Estimated cost will be about $4,000,000. Eliot C. Fletcher and Norman Six, Tampa, and Schmidt, Garden & Erikson, of Chicago, Ill., are architects.

Housing—Ritter Brothers, Harrisburg, Pa., were low bidder at $3,862,258 for constructing housing at Harrisburg Housing Authority. William L. Murray, Harrisburg, is architect.

Power plant—United States Rubber Co., plans to build a $3,000,000 power plant at Mishawaka, Ind. Boddy-Benjamin Associates, Inc., Detroit, Mich., is engineer.

Balt. residential development—Cross County Gardens, Inc., Baltimore, Md., will build by separate contracts a $3,000,000 residential development in Baltimore. Harry L. Katz, Baltimore, is architect.

Hospital—Alaska Native Service, Department of Interior, Washington, D. C., plans a hospital at Bethel, Alaska. Estimated cost is $3,500,000. Foss, Malcom & Olsen, Juneau, Alaska, are architects.

Housing—Farmer & Godfrey, Phoenix, Ariz., have been awarded a contract at $2,014,098 for housing in Phoenix, Ariz., by the Phoenix Housing Authority, Phoenix. Lescher & Mahoney, Phoenix, are architects.

Oil refinery—Process Construction Co., Los Angeles, Calif., will erect an oil refinery at Stettler, Alta., for the Pacific Petroleums, Ltd., Calgary, Alta., estimated cost of the project is $2,000,000.

Apartments—Clearview Housing Corp., Flushing, N. Y., will construct by separate contracts an apartment in Flushing. Cost is about $3,500,000. Benjamin Braunstein, Flushing, is architect.

Hospital—The City of Topeka, Kan., will open bids June 14, for an addition and nurses home at Stormont-Vail Hospital. Estimated cost is $3,300,000. Griest & Ekdahl, Topeka, and J. A. Hamilton, Minneapolis, Minn., are architects.

Dwellings—Oakview Homes, Phoenix, Ariz., awarded contract to construct group of dwellings to W. W. Robertson Co., Phoenix, at about $2,750,000. Max Maltzman, Los Angeles, Calif., is architect.

ENR INDEX NUMBERS

Index Base = 100		1913	1926	1949
Constr. Cost	May '51	543.9	261.4	114.02
Bldg. Cost	May '51	402.1	217.3	114.29
Volume	Apr. '51	515	269	149

Activity This Week

As reported to ENR (in millions of dollars)

Contracts by type of work

	This Week	Cumulative 19 wks 1951	1950	% chge
Waterworks	$6.3	$87.3	$88.3	−1
Sewerage	9.2	121.3	85.8	+41
Bridges	8.8	110.8	117.2	−5
Highways	34.6	373.4	392.1	−5
Earthwork, Waterways	2.8	210.9	142.6	+48
Buildings:				
Public	26.7	876.3	630.2	+39
Housg., pub.	15.2	203.8	82.1	+148
Housg., priv.	75.9	785.4	1,317.7	−40
Commercial	20.0	247.1	344.0	−28
Industrial	67.2	1,966.9	388.1	+407
Unclassified	28.1	580.0	326.0	+78

NOTE: Minimum size projects included are: Waterworks and waterway projects, $34,000; other public works, $60,000; industrial buildings, $82,000; other buildings, $300,000.

New capital for construction

	Cumulative 19 wks 1951	1950	% chge
Corporate Securities	$728.5	$636.2	+15
Fed. loans, Priv. Constr.	0	0	0
State and Mun:			
Excl. housing	761.8	743.7	+2
Housing	338.1	222.6	+52
Fed. Aid. non-fed. constr.	73.4	0	0
Total Non-Federal	$1,901.8	$1,602.5	+19
FEDERAL	2,602.5	0	0
Total Capital	**$4,504.3**	**$1,602.5**	**+181**

"GUNITE"
NEW CONSTRUCTION AND REPAIRS
- Prestressed Tanks
- Repair all Types Disintegrated Concrete
- Dam Reconstruction and Repairs
- Linings and Repairs to Reservoirs, Stacks, Bunkers, Sewers, Tanks, Tunnels, Pen Stocks
- Structural Steel Encasements
- Restoration of Masonry Structures

Nation-wide Operations—Experienced Personnel
Write for our new 48 page Bulletin
PRESSURE CONCRETE CO.
"Gunite" Contractors and Engineers
193 Emmett Street, Newark 5, New Jersey
So. Court Street, Florence, Alabama
33 N. LaSalle St., Chicago 2, Ill.
Liberty Life Bldg. Charlotte, North Carolina

DRILLING
ANYWHERE

We look into the earth
PENNSYLVANIA
DRILLING COMPANY
PITTSBURGH, PA.

OFFICIAL PROPOSALS

Bids: May 16, 1951

State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of the Highway Law, and special provisions for projects financed with federal aid funds, sealed proposals will be received until ten-thirty o'clock A.M., advanced standard time, which is nine-thirty o'clock A.M., eastern standard time on Wednesday, May 16, 1951, by Henry A. Cohen, Director, Bureau of Contracts & Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for the following projects: Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts & Accounts, Albany, N. Y., and at the office of the District Engineers noted below, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for plans and proposal forms for each contract is indicated below. A refund will be made in full to bidders for the return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

County	Contract No.	Name	Miles	Type	Deposit	Estimated Cost of Work
		DISTRICT No. 2				
		L. Ketchum, Dist. Engr., 109 No. Genesee Street, Utica, N. Y.				
Oneida	FAC 51-2	Rome West Artery (W. Whitesboro St.-plack River Blvd.) FAC 50-9 Proj. U635(3) Cont. 2	0.72	Traffic Control System	$1,000 Plans $10	$33,000
		DISTRICT No. 4				
		A. R. Mellican, Dist. Engr., Barge Canal Terminal, Rochester, N. Y.				
Ontario	FAC 51-3	Geneva City: Lake Front Arterial, Pt. 1 Proj. U452(5)	0.62	Grad. & Drain. = 0.55 mi.; 9" Cem. Conc. Pavt. 58' Wide = 0.06 mi.; Asph. Conc. Ty. 1A, Opt. = 0.01 mi. (North & South Ramps = 0.24 mi.)	$45,000 Plans $15	$822,000
Ontario and Monroe	OT 51-2 OT 51-3P RC 51-14 ST 51-2	Ontario Thruway, Sec. J & K Clover Street, S. H. 294 Mendon-Pittsford, S. H. 493 Five Secondary Roads	9.83	9" Cem. Conc. Pavt. 2 at 25' Wide = 7.73 mi. Asph. Conc. Ty. 1A, Opt. = 1.67 mi. *Run of Bank Gravel = 0.35 mi. Misc. Work = 0.08 mi. 4 Sp. Hy. Sep. Alpha I-Beam 255' Tot. 3 Sp. Hy. Sep. Alpha I-Beam 136' 3" Tot. 2 Sp. Hy. Sep. Conc. Rig. Fr. 162' Tot. 2 Sp. Hy. Sep. Conc. Rig. Fr. 183' 8" Tot. Alpha Royalty = $661.00	$220,000 Plans $100	$3,930,000
		DISTRICT No. 5				
		C. R. Watkins, Dist. Engr., 65 Court Street, Buffalo, N. Y.				
Erie	FARC 51-9 FAC 51-4	Lackawanna City, South, S. H. 5071 Hamburg Turnpike, FAC 49-10 Proj. U750(3) Cont. 3	2.39	Traffic Signal System	$4,000 Plans $10	$75,000
		DISTRICT No. 6				
		H. F. Brimm, Dist. Engr., 30 West Main Street, Hornell, N. Y.				
Tioga	FASS 51-14	West Creek Road (Smullin Bridge) Co. Rd. 308-408 Proj. S261(2)	0.50	Asp. Conc. Ty. 1A, Opt. 2 Sp. Alpha I-Beam 72' Ea. Alpha Royalty = $151.80	$9,500 Plans $10	$178,000
Chemung	FASS 51-10	Chemung-Van Etten-Loomis Bridge, Co. Rd. 3 Proj. S86-2)	0.28	Asph. Conc. Ty. 1A, Opt. 2 Sp. Alpha I-Beam 68' 9" Ea. Alpha Royalty = $115.20	$10,000 Plans $10	$189,000
		DISTRICT No. 10				
		J. J. Darcy, Dist. Engr., Montauk Highway at Little E. Neck Road, Babylon, L. I., N. Y.				
Bronx	FA BRP 51-1	Bronx River Parkway No. 0 Ext. (Bruckner Blvd. Interchange) Proj. U979(9)	0.27	8" & 9" Col. Cem. Conc. 2 at 34 Wide 3 Sp. Conc. Rig. Frame 1 at 81', 2 at 47' 3"	$85,000 Plan $15	$1,535,000
Bronx	FACBE 51-1	Cross Bronx Expressway Contract 1B Proj. U1084(11)	1.23	Demolition of Bldgs.	$9,500 Plans $10	$173,000

Proposal for each contract must be submitted in a separate sealed envelope with the name and number of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by draft or certified check payable to the order of "State of New York, Commissioner of Taxation & Finance" for the sum as specified in the advertisement and the proposal. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders".

When optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated.

The right is reserved to reject any or all bids.

B. D. TALLAMY
Supt. of Public Works

Bids: May 15, 1951

Airlines Terminal & Parking Garage

TRIBOROUGH BRIDGE AND TUNNEL AUTHORITY

SEALED BIDS WILL BE RECEIVED BY the Triborough Bridge and Tunnel Authority's Administration Building, Randall's Island, New York 35, N. Y., as follows:

Until 11:00 a.m. daylight saving time, on TUESDAY, MAY 15, 1951

For the construction of East Side Airlines Terminal and Public Parking Garage located 37th to 38th Streets and First Avenue, Borough of Manhattan.

Deposit required for specifications, etc., $75 for each set.

The information for bidders, form of contractor's bid, form of contract, the specifications, the plans and the forms of performance and labor and material bonds may be examined at the office of the Architect, John B. Peterkin, 36 West 44 Street, New York, N. Y., and copies thereof may be obtained upon deposit for each set, of the amount hereinabove specified, to be refunded upon return of the plans and documents in good condition within 30 days after the opening of bids.

Bids: June 15, 1951

Pump Stations

Mid-Valley Pipeline Company, Longview, Texas, will issue specifications and drawings May 15 and receive bid until June 15 covering building of six complete five thousand horsepower oil line pump stations and extending and adding to seven existing similar stations.

Contractors interested in receiving specifications and drawings contact D. J. Ward, Purchasing Agent, Longview, Texas, prior to May 10, 1951. Copies of drawings and specifications may be obtained by making a deposit of $25 which sum will be refunded upon returning. Good condition of the complete documents within ten days after receipt of same or if used in submitting a bonafide proposal.

Mid-Valley Pipeline Co.
D. J. Ward, Purchasing Agent
Bramlette Bldg., Longview, Texas

Bids: May 23, 1951

State Road Work

Sealed proposals will be received by the State Highway Department, at its offices in Dover, Delaware, until 1:00 P. M., E. S. T., May 23, 1951 and at that time and place publicly opened for contracts involving the following approximate quantities:

Contract 983
Incidental Construction
New Castle County

Item #1—Integral Curb & Gutter, Delaware State Hospital, Farmhurst
Item #2—Storm Sewer, Maryland Avenue & Atkins Avenue
Item #3—Cement Concrete Gutter, Holly Oak Terrace
Item #4—Parkway Curb Traffic Islands, Elsmere
Item #5—Storm Sewer, Franklin Avenue, Claymont
Item #6—Storm Sewer, Governor Printz Boulevard, Fairfield Avenue to Mt. Vernon Drive

Contract 1032
3rd Street Bridge Repairs
Wilmington, New Castle County

75 C. Y. Excavation for structures
400 C. Y. Borrow
14 M. Ft. Creosoted Timber Structures
13,000 Lb. Structural Steel
11,400 L. F. Timber Piles
51,500 Lbs. Steel Sheet Piles
1,600 S. F. Removal & Relaying Present Mesh Floor
5,500 L. F. 3/16" Fillet Welding
2,500 L. F. 1/4" Fillet Welding
Painting
Balancing Bascule Leaves
Maintenance of River Traffic
Maintenance of Highway Traffic
Installation of Locks & Adjustments
Removal Existing Fender System
Fender Lights
Repairs to Bridge Railing

The Employment Agency for these Contracts shall be the Delaware State Employment Service, 601 Shipley Street, Wilmington, Delaware.

Attention is called to the Special Provisions in the proposal, specifications and contract agreement.

Performance of contract shall commence within ten (10) days after execution of the contract and be completed as specified.

Monthly payments will be made for ninety (90) per cent of the construction completed each month.

Bidders must submit proposals upon forms provided by the Department.

Each proposal must be accompanied by a surety bond, certified check, or money to the amount of at least ten (10) per centum of the total amount of the proposal.

The envelope containing the proposal must be marked "Proposal for the construction of State Highway Contract No. ————————."

The Contract will be awarded or rejected within twenty (20) days from the date of opening proposals.

The right is reserved to reject any or all bids.

Complete sets of plans and specifications may be obtained after May 7, 1951 upon receipt of five dollars ($5.00) for each set, which amount will not be refunded.

Make checks payable to the State Highway Department.

STATE HIGHWAY DEPARTMENT
By: J. Gordon Smith, Chairman
R. A. Haber, Acting Chief Engineer
Dover, Delaware
April 25, 1951

Bids: May 21, 1951

New Filter Equipment

Sealed bids will be received until 9:00 a.m., EST, May 21, A.D., 1951, in the office of City Auditor and Clerk for New Filter Equipment at Water Treatment Plant, Fort Lauderdale, Fla.

Bidding blanks may be obtained from the office of the Engineers. Plans and specifications are on file in the office of the Engineer.

A deposit of $25.00 for plans and specifications and of $15.00 each for additional copies of plans or specifications will be required. All additional plans and specifications will be refunded upon their return in good condition within ten (10) days of the opening of bids.

A certified check for 5% of the total amount of the bid, made payable to: City of Fort Lauderdale, Florida, shall accompany each proposal as evidence of good faith and responsibility of the bidder. This check shall be retained by the payee as liquidated damages should the bidder refuse or fail to enter into a contract with the payee for the execution of the work embraced in the proposal, in the event the proposal of the bidder is accepted.

The Owner reserves the right to reject any or all bids.

F. D. RANKINS
City Manager

(Continued on page 105)

OFFICIAL PROPOSALS
(Continued from page 104)

Bids: May 17, 1951

New Jersey Turnpike Authority

Sealed proposals will be received by the New Jersey Turnpike Authority for:

CONTRACTS NOS. 7S, 7SA and 7SB

The work to be done under these Contracts involves the erection and painting of corrugated Steel guard rail and the furnishing, erection and painting of either or both steel and wood posts and other incidental work, all in connection with the construction of the New Jersey Turnpike. This work extends from the southern terminus of the Turnpike at Deepwater to the Mercer-Middlesex County line at the Millstone River. The division of work between Contracts 7SA and 7SB is at the Camden-Burlington County line. Contracts 7SA including all work in Salem, Gloucester and Camden Counties and Contract 7SB including all work in Burlington and Mercer Counties.

The principal items of work for Contracts Nos. 7SA and 7SB include:

Contract No. 7SA: Guard Rail, Erection and Painting, 100,000 lin. ft.; Steel and/or Wood Posts, Furnishing Erection and Painting, 8,200 each.

Contract No. 7SB: Guard Rail, Erection and Painting, 50,000 lin. ft.; Steel and/or Wood Posts, Furnishing Erection and Painting, 7,300 each.

The principal items of work for Contract No. 7S equal the sum of the quantities listed for Contracts Nos. 7SA and 7SB.

Bidders are hereby advised that the Authority has placed orders with various manufacturers for supplying the guard rail, including terminal pieces and bolts for splicing guard rail and for connecting rail to posts, and further, the Authority may, at its own option and convenience, furnish additional steel posts and brackets to the contractor.

Proposals will be received at the office of the New Jersey Turnpike Authority, 65 Prospect Street, Trenton 8, New Jersey until 10:30 o'clock Eastern Daylight Saving Time on the morning of May 17, 1951, and thereafter in the Veteran's Room of the War Memorial Building, Memorial Drive at Willow Street, Trenton, New Jersey, until 11:00 a.m., Eastern Daylight Saving Time, on the same date, at which latter time and place said proposals will be publicly opened and read.

The receipt and opening of proposals is subject to proper prequalification of the bidder in accordance with the regulations adopted by the New Jersey Turnpike Authority. Bidders must also submit with their Proposal a revised financial statement and a statement of plant and equipment.

Contract documents may be seen, and may be inspected by prospective bidders during office hours, after May 2, 1951, at the office of the New Jersey Turnpike Authority, 65 Prospect Street, Trenton 8, New Jersey and at the office of the Consulting Engineers, Howard, Needles, Tammen & Bergendoff, 55 Liberty Street, New York, New York.

Contract documents will be furnished for $5.00 for each set, upon application to the Authority. The payment will not be refunded and contract documents are not required to be returned.

Proposals must be made upon the standard proposal forms in the manner designated in the Standard Specifications, for Construction of the New Jersey Turnpike, and must be enclosed in sealed special addressed envelopes bearing the name and address of the bidder and the number of the contract on the outside, and must be accompanied by a certified check drawn to the order of the New Jersey Turnpike Authority and a proposal bond, each for not less than five (5) per cent of the amount of the proposal, but not less than $500.00 nor more than $200,000.00 and must be delivered at the place designated above on or before the hour named. Where proposals are submitted for more than one contract, one check and one bond based on the largest amount of work included in a single proposal will be sufficient. Copies of the proposal form to be used for submitting proposals, of the form for the proposal bond, of the form to be used for the financial statement and for the plan and equipment statement to be submitted with the proposal and special addressed envelope are furnished in detached form with the contract documents. Bidders submitting proposals on more than one of the above contracts are required to submit only one financial statement and only one statement of plant and equipment.

The Contract will be awarded or the proposals rejected within fifteen (15) days from the date of opening proposals. The right is reserved to reject any or all proposals.

THE NEW JERSEY TURNPIKE AUTHORITY
Paul L. Troast
Chairman

April 27, 1951

Bids: May 16, 1951

Nurses Home

ONONDAGA COUNTY HOME
Onondaga Hill, New York

SEALED PROPOSALS will be received until 2:00 P.M., E.D.T., May 16, 1951, by Robert W. Sollinger, County Purchasing Agent, in Room 107, at the Onondaga County Court House, Syracuse, New York, at which time and place they will be publicly opened and read aloud, for the construction of the above project.

Sealed Proposals shall be received for the following divisions of the work:

Contract No. 1—General Construction
Contract No. 2—Plumbing and Sanitary System
Contract No. 3—Heating and Ventilating
Contract No. 4—Electric Wiring System
Contract No. 5—Elevators, and Elevator Fronts and Doors

The Instructions to Bidders, Forms of Proposal, Form of Contract, Drawings and Specifications may be examined in the office of the County Purchasing Agent and at the Office of the Architects, Vedder and Curtin, A.I.A., 527 South Warren Street, Syracuse, New York. The above Documents shall also be on file for examination by prospective Bidders, Sub-Contractors and Materialmen, as follows:

Syracuse Builders' Exchange, Durston Bldg., Syracuse, N. Y.
Rochester Builders' Exchange, Rochester, N. Y.
Albany Builders' Exchange, Albany, N. Y.
Buffalo Builders' Exchange, Buffalo, N. Y.
Brown's Letters, 101 Park Avenue, New York City
Dodge Reports, 119 West 40th St., New York City.
Dodge Reports, 361 Delaware Avenue, Buffalo, N. Y.

Sets of the above Documents are obtainable from the County Purchasing Agent by depositing $50.00 for each set. Those who submit a Sealed Proposal for Prime Contracts to the County of Onondaga for this Project will be refunded their deposits in full if the Documents are returned in good condition on or before May 14, 1951. Others who receive the above Documents will be refunded one half of their deposits if the Documents are returned in good condition on or before May 14, 1951.

The right is reserved to reject any and all bids.

Robert W. Sollinger
Onondaga County
Purchasing Agent

April 4, 1951
Syracuse, New York

Bids: May 18, 1951

State Road Work

NOTICE TO CONTRACTORS: STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y.—Pursuant to the provisions of Highway Law, sealed proposals will be received until two o'clock p.m., advanced standard time, which is one o'clock p.m., eastern standard time, on May 18, 1951 by Henry A. Cohen, Director, Bureau of Contracts and Accounts, 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y., for

SOIL EXPLORATIONS AND FOUNDATION INVESTIGATIONS AT VARIOUR SITES ON THE NEW ENGLAND THRUWAY, PELHAM MANOR TO LARCHMONT, WESTCHESTER COUNTY, which constitutes CONTRACT NO. SPEC. SM-19.

Maps, plans, and specifications may be examined and obtained at the Bureau of Contracts and Accounts on the 14th Floor, The Governor Alfred E. Smith State Office Building, Albany, N. Y. and also in the office of J. S. Bixby, District Engineer, Pleasant Valley Road, Poughkeepsie, N. Y. and at the office of the consulting engineer, Robert W. Briggs, 271 North Avenue, New Rochelle, N. Y.

The deposit for a set of plans, specifications and proposal forms is $5.00. A refund in full will be made to bidders for return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

The Engineer's estimate of cost for this work is $16,825.00.

Proposal for this contract must be submitted in a separate sealed envelope with the name of the contract plainly endorsed on the outside of the envelope. Proposal must be accompanied by draft or certified check, payable to the order of the "State of New York, Commissioner of Taxation and Finance" for the sum of $850.00. The retention and disposal of the bidding check, the execution of the contract and bonds shall conform to the provisions of the Highway Law, as set forth in "Instruction to Bidders".

The right is reserved to reject any or all bids.

B. D. TALLAMY
Superintendent of Public Roads

Bids: May 29, 1951

Raising the Top of Dike and Rehabilitation of Runways

THE PORT OF NEW YORK AUTHORITY
LA GUARDIA AIRPORT
CONTRACT LGA-220.002

Sealed proposals for the raising of the top of dike and the rehabilitation of runways at La Guardia Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111-8th Ave., New York 11, until 2:00 P.M., Tuesday, May 29, 1951, and thereafter in the Auditorium of the Authority at the same address until 2:30 P.M., on the same date, at which latter time and place said proposals will be publicly opened and read.

Contract documents may be seen at the office of the Chief Engineer and copies will be furnished upon deposit of $25 per set. The deposit will be remitted if the documents are returned in good condition, not later than 30 days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman

New York, May 10, 1951

Bids: May 21, 1951

High Lift Pumps

Sealed bids will be received until 9:00 a.m., EST, May 21, A.D., 1951, in the office of City Auditor and Clerk for: High lift pumps at Water Treatment Plant, Fort Lauderdale, Florida.

Bidding blanks may be obtained from the office of the Engineers. Plans and specifications are on file in the office of the Engineer.

A deposit of $25.00 for plans and specifications and of $15.00 each for additional copies of plans or specifications will be required. All deposits for plans and specifications will be refunded upon their return in good condition within ten (10) days of the opening of bids.

A certified check for 5% of the total amount of the bid, made payable to City of Fort Lauderdale, Florida, shall accompany each proposal as evidence of good faith and responsibility of the bidder. This check shall be retained by the payee as liquidated damages should the bidder refuse or fail to enter into a contract with the payee for the execution of the work embraced in the proposal, in the event the proposal of the bidder is accepted.

The Owner reserves the right to reject any or all bids. F. D. RANKINS
City Manager

Bids: May 21, 1951

Wooden and Chain Link Fence Adjacent to Hangars No. 1 and 2

THE PORT OF NEW YORK AUTHORITY
NEW YORK INTERNATIONAL AIRPORT
CONTRACT NYA-140.002

Sealed proposals for the construction of a wooden blast fence and the furnishing and installation of chain link fence and obstruction lights adjacent to Hangars No. 1 and 2 at New York International Airport will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111-8th Ave., New York 11, until 11:30 A.M., Monday, May 21, 1951, at which time and place said proposals will be opened and read.

Contract documents may be seen at the office of the Chief Engineer and copies will be furnished upon deposit of $10 per set. The deposit will be remitted if the documents are returned in good condition, not later than 30 days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman

New York, May 10, 1951

(Continued on page 106)

OFFICIAL PROPOSALS
(Continued from page 105)

Bids: May. 21, 1951

500,000 Gallon Elevated Water Tank

Sealed bids will be received until 2:00 A. M., May 21, 1951 A. D. in the office of the City Auditor and Clerk of Fort Lauderdale, Florida for an Elevated Water Tank for the Waterworks System.

This work involves the installation of one (1) 500,000 gallon elevated steel water tank of tubular tower construction. Alternate bids will be considered for one (1) 500,000 gallon reinforced concrete elevated water tank.

Bidding blanks may be obtained from the office of the City Engineer. Plans and Specifications for the work are on file in the office of the City Engineer, and copies thereof may be obtained at the office of the City Clerk upon payment of $25.00 for each set. Any bidder, upon returning such set promptly and in good condition, will be refunded his payment; and any non-bidder, upon so returning his set, will be refunded $15.00.

A certified check for 5% of the bid, made payable to the City of Fort Lauderdale, Florida, shall accompany each proposal as evidence of good faith and responsibility of the bidder. This check shall be retained by the City of Fort Lauderdale as liquidated damages, should the bidder fail or refuse to enter into a contract with the city of Fort Lauderdale for the execution of the work embraced in the proposal, in the event the proposal of the bidder be accepted.

The City of Fort Lauderdale reserves the right to reject any or all bids.

F. D. RANKINS,
CITY MANAGER.

Bids: May 23, 1951

Lincoln Tunnel

THE PORT OF NEW YORK AUTHORITY
CONNECTIONS TO PORT AUTHORITY BUS TERMINAL
NINTH AVENUE STORES, EXCLUSIVE OF FOUNDATIONS
CONTRACT LT-120.006

Sealed proposals for the Ninth Avenue Stores, exclusive of foundations at the connections to the Port Authority Bus Terminal, New York City, will be received at the office of the Chief Engineer of The Port of New York Authority, Room 1100, 111 8th Ave., New York 11, until 2:00 P.M., Wednesday, May 23, 1951, and thereafter in the Auditorium of the Authority at the same address until 2:30 P.M., on the same date, at which time and place said proposals will be publicly opened and read.

Contract documents may be seen at the office of the Chief Engineer and copies will be furnished upon deposit of $25 per set. The deposit will be remitted if the documents are returned in good condition, not later than 30 days after the opening of proposals.

THE PORT OF NEW YORK AUTHORITY
Howard S. Cullman, Chairman.

New York May 10, 1951

Bids: June 14, 1951

Additional Water Supply

FOR
LATHAM WATER DISTRICT, COLONIE, NEW YORK

Sealed bids will be received by the Town Board of the Town of Colonie, New York, on the 14th day of June, 1951, for furnishing all labor, materials and equipment and constructing complete, a filter plant, aerator, pumping station and filtered water reservoir together with furnishing cast iron pipe, cast iron specials, valves and miscellaneous equipment for water supply mains and the unloading, hauling and distributing of cast iron pipe, cast iron specials, valves and miscellaneous equipment for the Project for Additional Water Supply from Stony Creek.

The Information for Bidders, Form of Bid, Form of Contract, Plans, Specifications and Performance Bond may be examined at the office of the Town Clerk, Town Hall, Newtonville, New York, and at the office of Keis & Holroyd, 257 Broadway, Troy, New York. Copies thereof may be obtained at the office of Keis & Holroyd or from the Town Clerk, upon payment of $25.00 for each set. Any bidder upon returning such set promptly and in good condition, will be refunded his payment, and any non-bidder upon so returning such set will be refunded $20.00.

The Town Board of the Town of Colonie, New York, reserves the right to waive any informalities in or to reject any or all bids.

A certified check made payable to the order of the Town of Colonie, in the amount of Five Per Centum (5%) of the bid must be deposited by each bidder with his bid as a guarantee that in case the contract is awarded to him, that he will, within five (5) days thereafter, execute such contract and furnish a satisfactory performance bond. On failure to do so, he shall forfeit the deposit as liquidated damages and acceptance of the bid will be contingent upon the fulfillment of this requirement by the bidder.

The successful bidder will be required to furnish a performance bond satisfactory to the Town of Colonie, New York, in the amount of the contract, and having as surety thereon, such surety company or companies as are acceptable to the Town of Colonie, New York.

The work will be let in separate contracts as follows:

Section No. 4A—Furnishing Cast Iron Pipe and Cast Iron Specials.
Section No. 4B—Furnishing Valves.
Section No. 4C—Furnishing Miscellaneous Equipment.
Section No. 5—General Construction on Filter Plant, Aerator and Filtered Water Reservoir.
Section No. 6—Filter Plant Equipment, Furnishing and Installing.
Section No. 7—Plumbing at Proposed Filter Plant.
Section No. 8—Heating at proposed filter plant.
Section No. 9—Electrical at Proposed Filter Plant.

No bidder may withdraw his bid within 30 days after the date set for the opening thereof. Any bid may be withdrawn prior to the above noted time for the opening of bids or authorized postponement thereof.

WILLIAM K. SANFORD, Supervisor

Keis & Holroyd
Consulting Engineers
Troy, New York
May 3, 1951

Bids: May 28, 1951

Sanitary Sewers and Appurtenances

RIVERSIDE MUNICIPAL AUTHORITY
RIVERSIDE NORTHUMBERLAND COUNTY, PENNSYLVANIA

Sealed bids or proposals, in duplicate, addressed to the Riverside Municipal Authority, 104 Mill Street, Danville, Pennsylvania, and marked "Bid for Constructing and Completing Sanitary Sewers and Appurtenances in Riverside Northumberland County, Pennsylvania," will be received at 104 Mill Street, Danville, Pennsylvania, until, but not after, May 28th, 1951 at four o'clock P.M., D.S.T., and at that hour Noon, on said date they will be publicly opened and read at 8:30 A.M., D.S.T., same day, by the Riverside Municipal Authority at the above address.

The approximate quantities involved are as follows:

30,138	Lin. Ft. Excavation and Refill for 8" Vitrified Pipe Sewer
6,789	Lin. Ft. Excavation and Refill for 8" Transite Pipe Sewer
6,163	Lin. Ft. Excavation and Refill for 6" Vitrified Pipe House Connections
1,000	Lin. Ft. Excavation and Refill for 4" Force Main Transite Pipe
30,138	Lin. Ft. Furnishing and Laying 8" Vitrified Pipe Sewer
6,789	Lin. Ft. Furnishing and Laying 8" Transite Pipe Sewer
6,163	Lin. Ft. Furnishing and Laying 6" Vitrified Pipe House Connections
1,000	Lin. Ft. Furnishing and Laying 4" Transite Pipe Force Main
144	Lin. Ft. Furnishing and Laying 8" Cast Iron Pipe at Railroad Crossings
718	Vertical Feet Standard Manholes
9	Manhole Drop Connections
103	Manhole Frames and Covers
2	Railroad Right-of-Way Crossings for 8" ½-wer Pipe including 36" Casing Pipes
1	Sewage Pumping Station Assembly Complete less electrical wiring
250	6" Y Branch, 8" Y.C. Sewers
32	6" Y Branch, 8" Transite Sewers
1,100	Sq. Yds. of pavement replacement
100	Sq. Yds. of sidewalk replacement
10,000	MFBM sheeting and shoring left in place by order of the Engineer
200	Cu. Yds. of Concrete
10	Cu. Yds. Miscellaneous Excavation and Test Pits
100	Cu. Yds. Excavating below Sub-Grade
50	Cu. Yds. Cinders
50	Cu. Yds. Gravel
200	Lin. Ft. Underdrain
500	Lin. Ft. Clearing trees and stumps between property lines on Avenue D and F
2,000	Cu. Yds. Rock Excavation

Any subsequent items that develop and are not otherwise covered.

OFFICIAL PROPOSALS

Plans, specifications and other contract documents may be obtained at the Office of the Riverside Municipal Authority, 104 Mill Street, Danville, Pennsylvania, upon payment of Twenty Dollars ($20.00) for each copy, which amount will not be refunded.

A certified check of the bidder drawn on a solvent clearing house bank made payable to Riverside Municipal Authority for an amount of Five Percent (5%) of the bid will be required for each bid. The Authority reserves the right to hold all certified checks and bids for a period of thirty (30) days before awarding contract.

A performance bond in the amount of the contract price and a labor and material payment bond in the amount of one-half the contract price, in the forms provided in the contract documents, will be required of the successful bidder.

The Riverside Municipal Authority reserves the right to reject any and all bids and/or to waive technical defects, as it may deem best for the interest of the Authority.

Bids when filed shall be irrevocable for a period of thirty (30) days.

RIVERSIDE MUNICIPAL AUTHORITY
104 Mill Street
Danville, Penna.

Sheppard T. Powell
Engineers
330 N. Charles St.
Baltimore 1, Md.

Bids: May 22, 1951

Demolition of Storage Tank

Sealed bids or proposals for the demolition of the 250,000 gallon Elevated Storage Tank of the Hartsdale Water District on Paret Lane will be received by the Town Board of the Town of Greenburgh at the Board Rooms of said Board in the Lyceum Building, Broadway and Central Avenue, Tarrytown, N. Y., until 10:30 A.M., Tuesday, May 22, 1951.

Specifications may be obtained at the office of the Town Engineer, Lyceum Building, Tarrytown, N. Y.

Each bid must be accompanied by cash or certified check made payable to the Supervisor of the Town of Greenburgh in the amount of Five Hundred ($500.00) Dollars. Said deposit will be considered as a guarantee that the Bidder will enter into a contract for the proposed work if awarded to him and furnish the necessary bonds, and will be forfeited to the Town of Greenburgh if he fails to do so within the time specified. Deposit of the successful bidder will be returned as soon as the contract is signed and the necessary bonds delivered and approved by the Town Board. Deposits of unsuccessful bidders will be returned as soon as the contract is awarded.

The successful bidder will be required to furnish a Surety Company bond satisfactory to the Town Board in the amount of the contract, guaranteeing the successful completion of the work in accordance with the Plans and Specifications and the payment of all obligations arising thereunder. He will also be required to show to the satisfaction of the Town Board that he is carrying Workmen's Compensation Insurance as required by law, Public Liability Insurance with limits of not less than One Hundred Thousand and Two Hundred Thousand Dollars ($100,000-$200,000) and Property damage insurance in the amount of One Hundred Thousand Dollars ($100,000).

The Town Board reserves the right to reject any or all bids or to accept any bid they deem to be in the best interests of the Town of Greenburgh.

By Order of the Town Board of the Town of Greenburgh
WILLIAM H. VAN DORN,
Town Clerk

Dated, Tarrytown, N. Y., May 1, 1951.

U. S. Government

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. DC-3400) will be received by Bureau of Reclamation, Sacramento, California, until May 29, 1951, and then publicly opened for furnishing labor and materials and performing all work for the construction of earthwork for Folsom Powerhouse, warehouse, and penstock fabricating areas. The work is situated north of Folsom City, California. Principal items are approximately: excavation, 837,000 cu. yds.; gravel surfacing, 3,900 cu. yds.; guardrail and bulkhead timber, 3.0 M.b.m.; barbed-wire fence, 1.71 mi.; corrugated-metal pipe, 600 lin. ft.; and other work. Time allowed for completion will be 450 days. For particulars, address Bureau of Reclamation, Sacramento, California; or Building 1-A, Denver Federal Center, Denver, Colorado.

(Continued on page 108)

SEARCHLIGHT SECTION

(Classified Advertising)

EMPLOYMENT: BUSINESS: **"OPPORTUNITIES"** EQUIPMENT: USED OR RESALE

STRUCTURAL ENGINEERS

Designers with at least 5 years experience on concrete and steel structures for commercial, school, university, municipal and government buildings with office in Chicago, permanent and advancement opportunities. Please submit entire background of education and experience with date available.

CHILDS & SMITH
Architects & Engineers
20 N. Wacker Drive Chicago 6, Ill.

REPLIES (Box No.): Address to office nearest you
NEW YORK: 330 W. 42nd St. (18)
CHICAGO: 520 N. Michigan Ave. (11)
SAN FRANCISCO: 68 Post St. (4)

CIVIL SERVICE

STRUCTURAL DESIGNER, Graduate Civil Engineer with at least five years experience in structural steel and reinforced concrete design. Experience on locks, dams and drainage structures desirable but not essential. Pleasant working and living conditions in city of 124,000 population. Salary open. Give full particulars, photo and references. Byron P. Lyons, Chief Engineer, Louisiana Department of Public Works, 11th Floor Capitol Building, Baton Rouge, Louisiana.

WANTED CIVIL Engineer and Transitman experienced in highway drainage and property surveys preferred. Give full details including experience, references and salary expected. Town of Fairfield, Engineering Dept., Town Hall, Fairfield, Conn.

POSITIONS VACANT

DRAFTSMEN—STRUCTURAL Steel Detailers experienced only. Alliance Engineering Co., 82 W. Washington St., Chicago, CE-6-2819.

CIVIL ENGINEER one to two years field layout experience desired. Must be able to read plans and take off quantities. This is an opportunity to connect with a progressive and growing concern. Give full details concerning age, education and experience in letter. Location usually in Eastern States. P-9657, Engineering News-Record.

BRIDGE DESIGNERS and Draftsmen, good pay for qualified men. Opportunities for advancement. Pleasant working conditions. Interesting projects. Write stating education and experience or apply in person. D. B. Steinman, Consulting Engineer, 117 Liberty St., New York 6, N. Y.

CIVIL ENGINEERING Technicians: Laboratory and field men experienced in soils, concrete and asphalt. Drillers; soil borings and diamond drilling; locations, East, Midwest and South. Furnish complete information including age, education, experience. Toledo Testing Laboratory, Toledo, Ohio.

CONSTRUCTION MAN for office to do quantity estimating, purchasing, and detailing. Nature of work is Heavy Construction, Industrial Building Construction, and Miscellaneous Government Work. Jobs under $500,000.00. Position permanent with well-established firm in Westchester County, New York. Submit data including training, experience, occupation during past three years, age, military status, wage requirement. P-9708, Engineering News-Record.

DETAILER AND Checker—Experienced in making and checking shop details for steel fabrication plant. All types of steel construction. State experience, references, and rate expected. Savannah Machine and Foundry Company, P. O. Box 590, Savannah, Ga.

WANTED MECHANICAL Engineer, age 35-50, should have had at least ten years experience in material handling, preferably in hoist equipment field. Also should have supervisory ability. Write full qualifications and salary requirements. P-9761, Engineering News-Record.

OFFICE MANAGER capable of handling all problems of large field office on force account type of construction projects. P-9676, Engineering News-Record.

SALARIED POSITIONS $3,500—$35,000

We offer the original personal employment service (established 41 years.) Procedure of highest ethical standards is individualized to your personal requirements. Identity covered; present position protected. Ask for particulars.
R. W. BIXBY, Inc., 272 Dun Bldg., Buffalo 2, N.Y.

POSITION VACANT

SUPERINTENDENT WANTED, experienced in deep hole marble quarrying with channelers. State age, experience, references, salary expected, etc. Replies confidential. P-9715, Engineering News-Record.

SELLING OPPORTUNITIES OFFERED

SALES ENGINEER with proven record selling engineering-construction services to industrial and process industries. Headquarters Atlanta, Ga., territory unlimited. Write fully SW-9646, Engineering News-Record.

SALES ENGINEER to work out of Atlanta covering Southeast selling architect-engineer services for schools, hospitals, office buildings, water & sewer projects. Sales experience not absolutely necessary. Must show in record responsible charge of architect-engineer work. Write fully SW-9645, Engineering News-Record.

POSITIONS WANTED

DIVER-FRANK Hefling, formerly Chicago, San Francisco US or foreign work. Passport. Capable of deep water, 17 yrs. const., salvage, surveys, special jobs outfitted. Record underwater torch. Improved telephone equipped gear, safety power compressor, single unit lifeline. Experienced designer air lift dredging, dewatering. Miami, Florida, 268 S.W. 8th St., Phone 3-8089.

MAINTENANCE AND Construction of Streets and Sewers. Superintendent with 20 years experience, half of which with Municipal and public works. Streets—Sewers—Equipment—Shop. Have succeeded in reducing Maintenance Costs more than 50 percent. Will be available on permanent or consulting basis June 1st. Reply PW-9460, Engineering News-Record.

BUILDING CONSTRUCTION Superintendent or General Superintendent 45 years experience. Thoroughly familiar with all types of Building Construction. References. E. Harold Bowen, 3450 NW 79th Street, Miami 38, Florida.

CONSTRUCTION EXECUTIVE, 50. Capable of managing an entire business. Thoroughly experienced with buildings, machinery installation, process piping and heavy construction projects. Actual superintendent and project manager background on large jobs. PW-9580, Engineering News-Record.

REGISTERED ENGINEER, experienced, Master's Degree, desires position in hydraulic-hydrologic field. Eastern states or foreign. PW-9575, Engineering News-Record.

ENGINEER GRADUATE C.E., 15 years experience, and registered. Desires position on the design of reinforced concrete, foundations, and structural steel. Prefer New Jersey or New York City location. PW-9667, Engineering News-Record.

PROFESSIONAL ENGINEER New York license. Past eight years in charge of office for consultants. Designing parkways, expressways and misc. municipal projects studies and reports. Drainage design, estimate specifications prior twelve years similar to above, and seven years construction surveys. Desires connection with present responsibilities, available soon. N. Y. C. preferred. PW-9710, Engineering News-Record.

SUPERINTENDENT: EXPERIENCE includes 30 years on housing, schools, industrial plants of all kinds, Cantonments and sewage. Salary $10,000. PW-9706, Engineering News-Record.

(Continued on page 108)

CONSTRUCTION ESTIMATOR
Available Immediately

16 Years Experience:
General Building Construction
Specification Writing
Architectural Engineering

E. D. GREENAWALT, JR.
1215 South Westmoreland
Dallas, Texas Phone - Edgemont 2-2247

CONSTRUCTION SUPERINTENDENT

Experienced in construction of Blast Furnaces. Must be a good organizer, able to handle labor and qualified to exercise executive ability. Compensation commensurate with ability of individual.

Write and furnish full information regarding education, training, chronological details of experience, age, salary expected, etc. All replies will be considered strictly confidential.

P-9382, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

CORROSION ENGINEERS

Wanted by large consulting firm—Corrosion Engineers with minimum of four years experience in corrosion investigations and design of cathodic protection on pipe lines and lead cables in country and city networks. Must be graduate electrical engineer (or equivalent). Work involves extensive travel. Only applicants with above qualifications will be considered. Give full details of education and experience, and references in application.

P-9617, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

STRUCTURAL DRAFTSMEN WANTED

For detailing and checking. Prefer men with 3 to 5 years experience with companies which fabricate structural steel. Write or apply in person.

DRESSER EQUIPMENT CO.
Ideco Division
875 Michigan Avenue, Columbus, Ohio

GOOD POSITIONS FOR
ENGINEERS, DETAILERS AND DRAFTSMEN
ON SEWAGE PROJECTS
Apply to
GANNETT FLEMING CORDDRY & CARPENTER, INC.
Harrisburg, Pa.

CONSTRUCTION SUPERINTENDENT

Superintendent experienced in office building or hospital type construction as well as factory type wanted for large project in Detroit area starting in August.

P-9673, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

PLANT & MAINTENANCE ENGINEER

A graduate engineer with broad experience in maintenance & plant engineering (work in chemical industry helpful but not essential). Willing to travel in U. S. To insure attention full details of age, experience, salary expected and when available for work must be given. Write Box ENR 1169, 221 W. 41 St., N. Y. 18, N. Y.

Additional Position Vacant Advertising on Page 109

A COURSE OF INSTRUCTION BY MAIL IN

STRUCTURAL ENGINEERING

Fortieth Year

OUR COURSES HAVE HELPED THOUSANDS
to better positions and to pass State Board Examinations

- Complete Structural Engineering Course.
- Public Works Structures.
- Architectural Engineering.
- Special Course C (State Board Exams).
- Reinforced Concrete Engineering.
- Structural Steel Designing.

Monthly payments permissible. Information sent without obligation. WRITE TODAY

WILSON ENGINEERING CORPORATION

College House Offices • Harvard Square • Cambridge, Mass., U. S. A.

POSITIONS WANTED
(Continued from page 107)

CONSTRUCTION EXECUTIVE: Engineer; 15 years const. experience large industrial plants, gas compressor stations, hydro-electric projects, industrial water supply systems. Excellent administrator and contact man. Salary $10,000. PW-9699, Engineering News-Record.

REGISTERED ARCHITECT, Civil Engineer, 30 years varied experience, excellent references. Interested Top Job only. PW-9690, Engineering News-Record.

POWER ENGINEER U. S. Consulting Engineer of international standing could head hydro-electric department of engineering or utility group. Comprehensive professional record will be supplied to interested parties. Presently available. PW-9725, Engineering News-Record.

SELLING OPPORTUNITIES WANTED

ESTIMATOR, 36, concrete, masonry, etc., 6 years, salesman, college, driving to California June 1. Will execute commissions for contractor or represent equipment firm anywhere. SA-9698, Engineering News-Record.

SALES ENGINEER: Construction and Railroad Engineer, BSCE, age 26, desires job as Sales Engineer for heavy equipment distributor or manufacturer. SA-9688, Engineering News-Record.

BUSINESS OPPORTUNITIES

Contractors:
I am interested in financial and active participation in a small construction company. My background: construction, engineering, degree Mass. Inst. of Technology, and business. Reply BO-9489, Engineering News-Record.

Wanted Aggressive Contractor
with practical know-how desires partner or working capital. Over twenty years experience all phases of contracting—estimating, purchasing, maintenance. Good organizer. Will consider young engineer as partner, or partner with capital. Will bear strictest investigation as to character, financial status, etc. Location: central New York. BO-9678, Engineering News-Record.

For Sale:
Civil Engineering & Surveying Business in growing industrial community in central New York. Write John D. White, broker, Paul Bldg., Utica 2, N. Y.

SPECIAL SERVICE

Right of Way
Clearing Wanted. By Contract. Will furnish men and equipment. Joe Rallick, Box 186, James City, Pa.

MISCELLANEOUS

Architectural Firm,
Broad Street office, has private office with drafting board with 160 square feet available for Mechanical Engineer. Telephone answering service. $100.00 per month. M-9718, Engineering News-Record.

PATENT ATTORNEYS

Patent Practice
before U. S. Patent Office • Validity and infringement investigations and opinions. Booklet and form "Evidence of Conception" forwarded upon request. Lancaster, Allwine & Rommel, Registered Patent Attorneys, Suite 454, 815 15th Street, N. W., Washington 5, D. C.

LEARN TO ESTIMATE

Today, more than ever before, you must know how to analyze building costs. If you want to become a successful builder, learn how to prepare a correct estimate in a hurry. Get in on the profitable work now available wherever you turn. Your success is assured if your estimates are right; otherwise you are licked before you start.

The Tamblyn System of Estimating will make a real estimator out of you in a few weeks of your spare time. We are so sure that you will want to learn it, that we will send you our complete home study course for ten days examination absolutely free. If you don't think it is the finest thing you ever saw, just return it and it won't cost you a cent. If you like it and want it, send us $8.75 when 10 days are up and $10.00 per month until $48.75 is paid.

This estimating system is based on forty years of actual construction experience. It has been sold all over the world for more than twenty years. Thousands of estimators and contractors swear by it. Our offer isn't hot air and big talk. We don't give you a diploma or a lapel button, but we do teach you down to earth estimating which will bring you profitable business.

Just send your name and address today, and we will mail you the complete course at once for your approval.

TAMBLYN SYSTEM

11-15 So. Pearl St., E-531

Denver, Colo.

ESTIMATING SERVICE

Any Trade and Type of Project

Literature and Sample on request

Construction Survey Cooperative

101 Park Ave., New York 17, N. Y.

MUrray Hill 5-7317 Founded 1922

STRUCTURAL STEEL ERECTION

Buildings, Bridges, and Power Houses 40 derricks and hoists—24 cranes available

Large quantities of erection equipment

KARL KOCH ERECTING CO., INC.

362 CASANOVA ST. *Kilpatrick 2-3800* BRONX 59, N. Y.

U. S. Government

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids Specifications No. DC-3398) will be received by Bureau of Reclamation, Lindsay, California, until May 24, 1951, and then publicly opened for furnishing labor and materials and performing all work for the construction of earthwork, pipe lines, and structures, laterals 66.9W, 68.8W, and 69.8W and sublaterals, Ivanhoe Irrigation District, Friant-Kern Canal Distribution System, Central Valley Project, California. The work is situated in the vicinity of Ivanhoe, California. Principal items are approximately: 167,000 cu. yds. of excavation; 159,000 cu. yds. backfill; 940 cu. yds. of concrete; furnishing and installing 6 pumping units; laying approximately 4.9 mi. of concrete pipe from 12-in. to 54-in. diameters; and other work. Time allowed for completion will be 365 days. For particulars, address Bureau of Reclamation, Lindsay, California; or Building 1-A, Denver Federal Center, Denver, Colorado.

SEARCHLIGHT SECTION

Albert Pipe Supply Co., Inc.	116
Albro Steel Co.	115
American Air Compressor Corp.	110
Amerlux Steel Products Corp.	112
Barkey, Frank A.	116
Bendix Machinery Co., Inc.	112
Bixby, R. W.	107
Boyer, R. H.	113
Brandeis Machinery & Supply Co.	115
Brunson Instrument Co., Inc.	114
Buff	112
Campanella & Cardi Construction Co.	116
Childs & Smith	107
Clemens Construction Co.	116
Coast Equipment Co.	110
Construction Survey Coop.	108
Contractors Machinery Co.	110
Dann Associates	116
Darien Corp.	110, 112
Davidson Pipe Co., Inc.	116
Day & Maddock Co.	115
Dickerson Inc.	117
Drachman Steel Corp., Hy.	110
Dresser Equipment Co.	107
Duffy Construction Corp.	109
Earthmoving Machinery Corp.	115
Electric Generator & Motor Co.	112
Equipment Corp. of America	113
Euclid-Memphis Sales, Inc.	113
Ferguson Co., H. K.	109
Fleming Mfg. Co.	114
Flynn Manufacturing Co.	112
Forsythe Equipment Co., Inc.	116
Foster Co., L. B.	112, 117
Frank, M. K.	114
Frantz Equipment Co.	117
Fraser & Sons Inc., J. B.	107
Gannett, Fleming, Corddry & Carpenter, Inc.	107
General Equipment Co.	115
Greenawalt, Jr., E. D.	107
Greenpoint Iron & Pipe Co., Inc.	116
Greensburg Machine Co.	113
Groves & Sons & Co., S. J.	112
Guion, H. P.	115
Heath, Irving L.	114
Hickerson, Roy D.	114
Hodge & Hammond, Inc.	110
Ingersoll Co., Charles M.	112
Johnson, M. L.	117
Keystone Construction Co.	117
Koch Erecting Co., Karl	108
Kofman's	114, 116
Larsen Piling Corp.	112
Learned, Harold N.	114
Long Island Structural Steel Co.	115
Luria Brothers & Co.	115
MacNeal, Donald B.	114
MacQuinn, Harold	116
Martin, Inc., Ivan M.	116
Mashek, V. F.	117
McCarrick Brothers	116
McKee & Co., Arthur G.	109
Mississippi Valley Equipment Co.	112, 113
Morrison Railway Supply Co.	117
Murphy, R. W.	117
National Blue Print Co.	114
Nesbitt Equipment Co.	110, 114
O'Neill, A. J.	112
Pandolfo Co., S. F.	117
Reynolds, J. R.	114
Saw Mill Supply Inc.	114
Schoonmaker Co., Inc., A. G.	110
Schultz Contracting Co., Inc., John B.	112
Sherwood Materials & Equipment Co.	112
Smith Inc., L. B.	111
Stanley, Tipton	114
Stone the Crane Man	110
Susquehanna Paving Materials Co.	117
Tamblyn System	108
Tractor & Equipment Co.	112
Tri-State Equipment Co., Inc.	112
Tuller Construction Co., The	112, 116
Vulcan Iron Works	113
Walsh Co., Richard P.	110
Warren-Knight Co.	114
Weiss Co., B. M.	110
Wellworth Trading Co.	112
Wilson Engineering Corp.	108

CONSTRUCTION SUPERINTENDENT

Experienced in construction of Open Hearth Plants. Must be a good organizer, able to handle labor and qualified to exercise executive ability. Compensation commensurate with ability of individual.

Write and furnish full information regarding education, training, chronological details of experience, age, salary expected, etc. All replies will be considered strictly confidential.

P-9381, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

Materials Engineer and Soils Engineer

For construction work in eastern section of the United States. Duration of work 6 to 8 months. Requirements: Materials Engineer—Field testing and control of materials of construction and concrete mix design. Soils Engineer—Soil surveys, identification testing (field and laboratory) compaction control and stabilization. In reply give brief resume of experience.

P-9537, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

ASSISTANT PROJECT MANAGER

for large construction operation

Thorough knowledge of construction business including estimating, purchasing, cost distribution, negotiating with owners and subcontractors.

Good personality and appearance required. Opportunity for right man for permanent position with large construction corporation.

Reply to Mr. Carl H. Walker
Duffy Construction Corporation
P. O. Box 111, Lockland 15, Ohio

CONSTRUCTION SUPERINTENDENT & ENGINEER

Preferably a technical college graduate experienced in building construction and equipment installation. Experience in chemical plants beneficial. Willing to travel in Continental U. S., usually near a large industrial center. To obtain more than casual consideration your letter must give full details of experience, age, salary expected and when available. No contacts will be made with present employer without applicant's consent.
Write Box ENR 1178, 221 W. 41 St., N.Y. 18, N.Y.

SANITARY ENGINEERS DESIGNERS DRAFTSMEN

Experienced men wanted by Consulting Engineers Office—State qualifications age experience salary and date available in first letter. Replies held strictly confidential.

P-9485, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

WANTED
BRIDGE DESIGNERS
DESIGNER DRAFTSMEN
RESIDENT HIGHWAY ENGINEERS

Experienced men wanted. State qualifications, age, salary and date available in first letter. Location, Western Pennsylvania.

P-9592, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

DESIGNERS

We pay among the highest rates in the industry
Our employees share annually in company profits

Must be willing to relocate in Cleveland
Permanent employment
Our continuous expansion and growth offers many fine future opportunities.
We need Designers experienced in Blast Furnace, Steel Mill or Oil Refinery Design.
Men with specific experience; training and background in the following classifications:

STRUCTURAL DESIGNERS
CONCRETE DESIGNERS
ELECTRICAL DESIGNERS
ENGINEERING DESIGNERS
CHECKERS

Our working conditions are the best; our offices are air-conditioned and well-lighted.
We want men who have a genuine desire to develop and advance.

Write to

ARTHUR G. McKEE & COMPANY

2300 Chester Avenue — **Cleveland 1, Ohio**

ENGINEERS

ELECTRICAL - MECHANICAL - STRUCTURAL

Openings in Ohio and New York offices offering long term employment with good salary for qualified Group Leaders, Designers and Draftsmen experienced in one or more of the following phases of industrial plant design:

Electrical	Power, lighting layouts and electrical controls.
Mechanical	Plant layout, process piping, conveyors, heating and ventilation, boiler houses, process equipment layout, refrigeration, plumbing, tanks and vessels, packaging equipment, special machinery and equipment.
Structural	Structural steel and reinforced concrete.

Please submit complete resume stating experience, education, salary required and availability date.

THE H. K. FERGUSON COMPANY
Engineers and Builders

The Ferguson Bldg. 1783 E. 11th St.
Cleveland 14, Ohio

19 Rector Street
New York 6, N. Y.

WANTED

ENGINEERS

. . . to train as . . .

Industrial Consultants in Fire Protection Engineering

full pay to start—complete training field engineering with top U. S. and Canadian industry—usual pension and other benefits. Permanent.

Write complete qualifications to

P-9609, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

ELECTRICAL ENGINEER

Graduate, with five to ten years experience in design of steam and hydro-electric power plants and high voltage substations. Excellent opportunity with large consulting firm in New York for Engineer with satisfactory qualifications. Please send resume of experience and summary of personal data to

P-9633, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

DIESEL POWER

FOR

IMMEDIATE SHIPMENT

UNIT CAPACITIES—10 TO 1875 KVA

A.C.—50 AND 60 CYCLES

VARIOUS VOLTAGE



A PARTIAL LISTING OF OUR INVENTORY

KVA	Make	Model	HP	RPM	KVA	Make	Model	HP	RPM
1875	Fairbanks Morse	33F16	2000	300	375	Enterprise	DSG-6	450	450
1420	Fairbanks Morse	38D8⅛	1600	720	330	Superior	KNA	396	514
1250	General Motors	16-278A	1600	720	312	General Motors	8-268A	450	1200
937.5	General Motors	12-567	1080	720	312	Clark	MD-4	375	327
625	Alco	6-12¼x13T	750	600	125	General Motors	3-268A	150	1200
425	Baldwin	VO-6	510	450	75	General Motors	6043C	90	1200
400	Buckeye	80	480	600	62.5	Int'l Harvester	UD-18	76	1200

D.C. UNITS ALSO AVAILABLE

A. G. SCHOONMAKER COMPANY, INC.

DIESEL DIVISION, 50 CHURCH ST., NEW YORK 7, N. Y.

PORTABLE COMPRESSORS

Sales—Rental
Rental Purchase

15 CFM LINDSAY (Gas) 2 Pneu
25 CFM LINDSAY (Gas) 2 Pneu
60 CFM INGERSOLL (Gas) 2 Pneu
60 CFM CHICAGO (Gas) Skids—2 Pneu
105 CFM WORTHINGTON (Gas & Diesel)
105 CFM INGERSOLL (Gas) 2 & 4 Pneu
160 CFM WORTHINGTON (Gas) Skids—1 Pneu
210 CFM WORTHINGTON (Gas & Diesel) 3 Pneu
210 CFM GARDNER DENVER (Gas) Skids 4 Pneu
315 CFM INGERSOLL (Diesel) 4 Pneu
315 CFM WORTHINGTON (Gas) 4 Pneu
315 CFM LeROI (Gas) 4 Pneu
500 CFM WORTHINGTON (Diesel) 4 Pneu

RENT—SELL—BUY

Stationary—Portable
Electric—Steam—Gas—Diesel
All sizes—All makes

SELECT REBUILTS—AMERICAN

American Air Compressor Corp.

Dell Ave. & 48th St., North Bergen, N. J.
SINCE 1902



• STRUCTURAL STEEL SHAPES •

New and Used—Immediate Delivery

At present our inventory of steel shapes and forms includes a full line of both new and used steel especially for heavy construction work. 4" I beam to 36" Girder Beam. 14" Columns 287#/398#

BEARING PILE SECTION

Stock list on request. Write, wire or phone.

HY DRACHMAN STEEL CORPORATION

Warehouse
14-23 34th Ave., Astoria L. I., N. Y.
Astoria 8-8023; 8-4484-5

Sales Office
563 E. Tremont Ave., New York City, N. Y.
Cypress 9-5440-1

SHOVELS—CRANES—DRAGLINES
NEW Lima 1201 Diesel Shovel 3½ yd.
Koehring 605 Crane-Dragline 1½ yd. Diesel.
Manitowoc 2000B, 1½ yd. Diesel Crane. Excellent.
Link-Belt K-595 Dragline, 2½ yds. Diesel.
P&H 955 Dragline Diesel 90 ft. boom.
P&H 1055 Shovel, 3½ yd. Diesel. New '50.
Lima 34, Paymaster, ⅜ yd. Diesel Shovel. Excellent
Lima Paymaster ½ yd. Truckcrane, rebuilt, 80' Bm.
Lima 1201 Hi-Lift Shov-Drag, 1950.
Lorain Model 80 Diesel Shovel 1¼ yd. cap.
Buc-Erie 44-B 2 yd. Diesel Shovel.
Lima 602, 1½ yd. Shovel-Crane-Drag. Diesel.
Lima 802, Shovel-Crane-Drag, 2 yd. Diesel.
Northwest Mod 60, 2½ yd. Shovel. Diesel.

CONCRETE PLANTS—BINS & SILOS
Butler 250 bbl. cement, 50 yds. 3 compt. aggre.
B-K 300 ton 3 compt. aggre. 250 bbl. cement 2 yd. weighbatcher. Complete.
New Steel 105 ton 3 compt. aggre. bin. Scales.
B-K 110 bbl. bulk cement bin Richardson scales.
Johnson 4-compt. agg. 2 Cement, 4 yd. batcher with 858 bbl. bulk cement silo.
Ready-Mix new 1951 4 comot. 3 for 200 tons aggregate 1-300 bbl. cement with 56-S Mixer.

ASPHALT PLANTS
Cedar Rapids Travel Mix Plant 100-150 tons.
B-G Model 848 "Travel Plant".
B-G 842 Port. Utility Plant. Complete.
Littleford 1000 gal. Distributor on Int. Truck.

STIFF LEG AND GUY DERRICKS
Steel 35' stiff leg derrick 100' boom.
American 20 ton stiff leg derrick 90' boom.
Stiff leg derrick 15 ton 100 ft. boom.
American 20 ton Guy derrick 100 ft. boom.
Stiff Leg derrick 15 ton 65 ft. boom.

CONCRETE MIXERS AND PAVERS
Koehring 34-E Twin Batcher Paver.
2 Ransome 34-E Dual Drum Pavers Diesel.
2 yd. 56-S Smith Model T Tilting Mixer.
Rex 28-S Builders Mixer, Elec. New 1947.
Complete "Mixmobile" plant, all equipment.
28-S Ransome Builders Mixer. Elec.
Koehring 56-S stationary Mixer. New '50.

RICHARD P. WALSH CO.

30 Church St. New York 7, N. Y.
Cable RICHWALSH COrtlandt 7-0723-4

Pile Driving Equipment

Vulcan and McKiernan-Terry
Steam Pile Hammers and Extractors
Pile Driving Accessories
Drop Pile Hammers and Caps
Steel Sheet Piling

CONTRACTORS MACHINERY Co.

2637 Southwest Blvd. Kansas City 8, Mo.
Phone Valentine 4740

45 TON GANTRY CRANE
Clyde Electric, 85 ft. Boom, 24 ft. Track Ga., 27 ft. Gantry

1302 FT. AIR COMPRESSOR
1302 ft. Ingersoll Rand Pre-2, 220 hp, 3 ph., 60 cy., 2200 volt

15 STEEL STORAGE TANKS
10,000, 15,000 & 20,000 Gal. Cap.

DARIEN
60 E. 42nd St. N. Y. 17, N. Y.

SALE OR RENT

1—Owen Grapple size 86 Type RA.
1—16B Bucyrus Shovel & Bhoe.
1—¾ Northwest 25 Gas as Bhoe.
1—MC 3 Lorain Truck Crane.
1—8 to 12 Ton Huber Tandem Roller.
1—6 Ton Huber 3W Diesel Roller.
1—41B Bucyrus Steam Crawler Crane 65' Boom.
1—45' Crane Boom for Link Belt LS90.
1—35 Ton Plymouth Gas Loco. 1943.
1—40 Ton Industrial Oil Fired Loco Crane 1943.
1—65 Ton 0-6-0 Saddle Tank Loco 1943.

B. M. WEISS CO.

Girard Trust Co. Bldg. Phila. 2, Pa.
Rittenhouse 6-2311

Scoopmobiles & Buggymobiles

NEW & USED
For Sale or Rent

HODGE & HAMMOND, INC.

720 Garrison Ave. New York 59, N. Y.
Phone: Kilpatrick 2-2400

SHOVEL FRONT

BUCYRUS-ERIE 54B. Excellent 2½ yd Esco dipper. Complete attach. for less than price of new dipper alone.

COAST EQUIPMENT CO.

948 Bryant St. San Francisco

FOR SALE

1¼ Yd. Lorain
2 Yd. Northwest #8
3½ Yd. Lima 1201
3 Yd. Monogahan
35 Ton Whirley Electric
10 Ton Krane Kar
35 Ton Stiff Leg Derrick
1¼ Yard Bucyrus-Erie Model 42-B. Steamer

3 Drum Steam Hoist 10½ x 14 Chests
10 to 50 ton Gantry Cranes
10 to 60 ton Locomotive Cranes
15 ton Truck Crane #3 Northwest
20 Ton Truck Crane General
Locomotives & Cars
25 Yd. LeTourneau Scrapers

5 to 32 Yd. Wagons
Hammers Vulcan #2-3-3000 — McK.T. #4-5-6-7-9B2—E2 Extractor Pumpcrete Machine
Bins — 10 to 450 ton — 200 barrel to 750 Brl.
10" Hydraulic Dredge

STONE THE CRANE MAN 1132 Prudential Bldg., Buffalo 2, N. Y.

PUMPCRETE For Sale

160 Double—1200 Ft. Pipe—Large Stock Fittings & Spare Parts

NESBITT EQUIPMENT COMPANY

451 Calvert St. Alexandria, Virginia

L. B. SMITH INC. OFFERS

AIR COMPRESSORS

Schramm 105 cubic foot gas powered compressor on 4 steel wheels.
Ingersoll-Rand 105 cubic foot, Waukesha gasoline power, on two rubber tires.
Gardner-Denver 160 cubic foot gas powered compressor on 4 steel wheels.
Worthington 210 cubic foot, two-stage, air-cooled, on steel wheels with Hercules diesel.
Pennsylvania 12" x 10" class 3A single cylinder, 355 cubic foot P.D., flat belt driven 50 HP slip ring motor.
Worthington two-stage, water-cooled, vertical 250#, 60 CFM, new condition.

QUARRY EQUIPMENT & BINS

1524 Cedarapids roller bearing jaw.
3018 Cedarapids roll.
10x7 Allis-Chalmers Blake type jaw crusher.
#1 Cedarapids Kubit impact breaker.
4' x 12' Tyler F600 double deck screen.
4' x 12' Cedarapids double deck, rebuilt.
42" x 24' revolving screen.
16" x 90' bucket elevator.
80-ton, 2-compartment, 8'x18' storage bin with clamshell gates.
Conveyors—18"—24"—30"—36". Also belt.

TRUCKS—TRAILERS

1½-ton Ford with any body.
2½-ton GMC, rebuilt.
1949 White Model WC26 dump trucks, new condition.
2000-gallon tanks on semi-trailer mounting.
New and rebuilt dump bodies.
2,000 gallon tanks on semi-trailer mounting.
New and rebuilt dump bodies.

GENERATORS & LIGHT PLANTS

1½ KW to 125 KW, alternating and direct current, gasoline and diesel powered.

GASOLINE AND DIESEL ENGINES

Buda, Hercules, Hill diesels, rebuilt.
New and rebuilt Murphy diesels.
GM 6 and 12 cylinder diesels, practically new.

SHOVELS—CRANES

Lorain 75B, 1¼ yd. shovel, diesel power.
Lorain 55B gas powered crane.
Brownhoist 1-yd. gas shovel and crane.
Lorain 30 combination ½ yd. shovel, hoe & clam.

SHOVEL & CRANE ATTACHMENTS

Lorain 41 shovel attachment new condition.
Lorain 40A shovel attachment complete.
Lorain 75B-77 1½-yd shovel attachment rebuilt.
P&H 203 shovel attachment.
Chain crowd Lorain 30A shovel attachment.
Lorain 40 Hi-Lift shovel attachment.
Bucyrus-Erie 1½-yd. rock bucket.
Koehring 301 dragline fairlead.
Lorain 75 fairlead.

Backhoe Buckets & Attachments

¾-yd Lorain, 40, LBS #6105. 44" cutting width, teeth, sheave.
28" outside width solid bottom type LBS #4377, good condition.
¾-yd Amsco 40" cutting width, LBS #8101.

CLAM—DRAG—SCRAPER BUCKETS

NEW TAGLINES

McCaffrey Model 648 for 1¼ to 2-yd crane.
McCaffrey Model 636 for ¾-yd to 1-yd crane.

SHOVEL DIPPERS

Lorain 41, ¾-yd. LnS #7433, rebuilt.
New Lima 1-yd, Amsco, LBS #2295.
Bucyrus-Erie 1¼-yd gas air, LBS #3782, fair.
Lorain 75 manganese 1¼-yd, LBS #7233, teeth and bail.
Lorain 75B, 1¼-yd extended lip, 1¾-yd LBS #2260.
Pettibone-Mulliken 2-yd Lorain 82 or 820, manganese, LBS #5361.
Pettibone-Mulliken 2-yd for 3500 Manitowac LBS #5763.
Esco 2½ yd cast weld dipper with bail & teeth

CONCRETE ROAD BUILDING & MISCELLANEOUS CONCRETE HANDLING EQUIPMENT

Concrete Finishers

Jaeger type "L" double screed, 10½'-12½', rebuilt.
Heltzel 10'-12' finisher, rebuilt.
Blaw-Knox gas-electric 10½'-12½', rebuilt.
2 Koehring 10'-12', rebuilt.

Concrete Road Forms

830'—Truscon 7"x8" forms, with stakes.
1380'—Heltzel 7"x8" forms, with stakes.
1220'—Heltzel 9"x8" forms with stakes.
1430'—Heltzel 10"x8" forms, with stakes.

Fine Grade Machines

Flynn surgrader 10'-12', rebuilt.
B.B. Fine Grader for 21' width, rebuilt.

Form Graders—2 of each

Cleveland formgrader, new condition.
Carr formgrader, new 1944, rebuilt.

WELL DRILLS & TOOLS

Sanderson-Cyclone #42 well drill, new.
Sanderson-Cyclone #44 well drill, new.
Bucyrus-Erie 21W on C30 International chassis.
Bits—Stems—Bailers—Sockets—Etc.

DITCHERS

Barber-Greene 44C Trenching Machine 18" to 24" cutting width, 7' depth.

GRADERS

New Warco D76 tandem driven grader, 12' blade, V-type scarifier, 13.00x24 tires all around, 24,500 lbs., International UD14A diesel engine.
Austin Western 77 tandem drive, scarifier, 12' blade, gas power, hydraulic controls.

Phone **HARRISBURG, PA. 7-3431**

LASTING • BONAFIDE • SERVICE — L.B. SMITH, INC.

L. B. SMITH INC. CAMP HILL, PA. SUBURB OF HARRISBURG

WE OWN THE EQUIPMENT WE ADVERTISE

BIT DRESSER: Bucyrus Erie model 12, complete.

LOG GRAPPLE: 1—Blaw Knox, jaws 42" wide, opening 8'9"

LOCOMOTIVES: 2—50 ton, 4 wheel, saddle tank, Switching Locomotives, with National Board boilers. Excellent condition for immediate service and delivery.

BOILERS: 1—Erie City, 150 H.P., ASME, return tubular, 4" tubes, 150 lbs. working pressure, pin hole grates and all fittings. 2—220 H.P., 150 lbs. pressure, National Board, 3 drum, low head, complete.

BUCKETS: 6—Steubner 32 cu. ft. capacity, drop bottom, self clearing. 1—Blaw Knox, 2 yd. capacity, Clam Shell, NEW condition.

DIESEL MOTOR: 122 H.P. Caterpillar D13000 complete with clutch, V-belt pulley.

CRUSHERS, GYRATORY: Various makes, size 12" x 44" up to 42" x 134".

CRUSHERS, JAW: Various makes, 10 x 15" to 48" x 60".

CRUSHERS, REDUCTION: Symons 2 ft. standard head. Telsmith 2 ft. and 3 ft. Gyrasphere Traylor 4 ft., type TYC.

CRUSHER SPECIALS: 1—Allis Chalmers Superior 30" and one 7½ ft. Gyratory. 1—Farrel 18" x 36" and one 24" x 36" Jaw.

DERRICKS & HOISTS: 150 ton capacity, 180 ft. mast, 160 ft. boom, 65 tons @ 140 ft., with or without 125 H.P. American, electric, 3 drum Hoist and 30 H.P. swinger. 1—15 ton Gas Derrick, 100 ft. mast, 90 ft. boom, with or without gas or electric hoist, double drum, with swinger. 2—15 ton Terry Stiff Leg 75' boom, complete with bullwheel, legs, sills, blocks, etc.

COMPRESSOR: Worthington 2 stage, 29—23 x 21, 600 H.P. synchronous motor, 3 phase, 60 cycle, 2200 or 440 volt, 180 RPM, 100 lbs. pressure, complete with all auxiliary equipment. In operation now, available immediately.

DRYERS & KILNS: 5 ft. x 40 ft. up to 10 ft. x 80 ft., single and double shell.

CLASSIFIER: WEMCO Simplex size 78" x 28-½ ft. complete.

DRAG SCRAPERS, CRESCENT BUCKETS: 1—Sauerman 2 yd. Drag Scraper outfit complete, without 75 H.P. motor. 1—Sauerman ¾ yd. capacity, complete with motor. 1—Sauerman 1 yd. capacity, complete with diesel motor.

MINE HOISTS: Single and double drum, 150 H.P. to 2500 H.P.

PUMP MOTORS: 2—1000 H.P., 1800 RPM, 2300 volt, complete with automatic control equipment. NEW, UNUSED.

SHOVELS & DRAGLINES: 1—P & H model 7030, electric, 6 yd. capacity, NEW condition. 1—Marion 151-M electric, 6 yd. cap., combination Shovel and Dragline. 1—Bucyrus Erie 120-B, 4 yd. electric Shovel; also, one Bucyrus Erie 170-B, 6-½ yd. electric, 3 phase, 60 cycle, 2200 or 4600 volts. 1—Lima 850 combination Shovel and Dragline, 2 yd., diesel. 1—Lima 1002 Dragline only 2-½ yd. cap., 80 ft. boom, diesel, 6 Crawler tread, diesel powered Cranes, late type, current models P & H, Northwest, Lorain, Osgood, 2 yd. and 2-½ yd. capacity, with 60 to 80 ft. booms, wide treads and long cats.

TRUCKS: Euclid 15 yd., model T, end dump, 22 ton capacity, 275 H.P. Cummins motors.

A. J. O'NEILL
Lansdowne, Pa.
Phila. Phones: Madison 3-8300—3-8301

FOR SALE

Bucyrus-Erie 43B, 1-¾ cu. yd. Shovel-Crane-Dragline combination, S/N 15112, 80' drag. boom. Buda 6DC844 diesel engine.
Three LeTour. C-11 Tournapulls, S/N B6T2430, 2431, 2439 w/Buda 6DC844 diesel engines.
Located: Swedesboro, N. J.

Northwest Model 3 Shovel & Dragline combination, ¾ cu. yd. with Cummins diesel engine. S/N 5421.
Marion 111-M, 3½ cu. yd. Shovel & Dragline combination, S/N 8608, w/80' drag. boom, 30' shovel boom, 23/8" sticks. Kohler light plant, Twin G-M-C 671 diesel engines.
Lima "1201" Hi-lift stripping shovel, S/N 3131, w/Cummins "L" diesel engine. Kohler light plant. Three D8 Cat. Tractors, 1H and 8R series, w/P.C. Units.
Located: Johnstown, Pa.

Northwest Model 5, 1-¼ cu. yd. Shovel-Drag-Backhoe combination, S/N 4182, w/60' drag. boom, 23' shovel boom. Cummins diesel HBI 600 engine.
Located: Woodbridge, N. J.

Lima "1201" Std. Shovel, S/N 3656, 3½ cu. yd. w/Kohler light plant, Cummins "L" diesel engine.
Located: Conshohocken, Pa.

Three D8 Cat. Tractors, 1H and 8R series, w/P.C. Units located: Syracuse, N. Y., One D8 Cat. Tractor, 1H series w/P.C.
Unit located: Meadville, Pa.

S. J. GROVES & SONS COMPANY
460 Hoover St. N. E. Mpls. 13, Minn.
Ph.: Gladstone 1841

LIGHT PLANTS

Brand New! War Surplus
Signal Corps
Power Unit PE 197



115v 60 cy. A.C. single ph. 5 K.W. Hobart, water cooled, 14 h.p. 4 cyl. Hercules engine. **Remote Control,** complete panel board with instruments. 150 ft. auto. remote control cable with reel; 150 ft. #6 hvy. duty wire with reel; housed in metal case with replacement parts & tools. Cable with reels alone worth $400. Reg. price of unit $1900. Shipping wt. 1250 lbs. Our price, complete..... f.o.b. Chicago **$895.00**

WISCONSIN GAS ENGINES at a big saving!

Built With Special Heavy Duty Fly Wheel

Model A.B., 1.7 to 3 H.P. Wt. 60 lbs. List Price, $90.00. **Special Price... $76.00**

Model A.K., 3 to 4.1 H.P. Wt. 70 lbs. List Price, $106.50. Special Price... **$86.50**
F.O.B. Chicago.

WRITE FOR ILLUSTRATED FOLDER

WELLWORTH TRADING CO.
1831 S. State St. Dept. ENR Chicago 16, Ill.

FOR SALE
3 Model 5FD 10-yard DUMP BEDS @ $500.00 each.
SHERWOOD EQUIPMENT CO.
Independence, Kansas

FOR SALE
ONE—FLYNN SOIL-CEMENT STABILIZER
Excellent Condition
Contact
Flynn Manufacturing Company
P. O. Box 1668 Alexandria, Louisiana

We do a "Nation-Wide" Business in
STEEL SHEET PILING
IMMEDIATE SHIPMENT

139 pcs. 60 ft Carn M115-Illinois
425 pcs. 60-30 ft Inland I27-Chicago
400 pcs. 50&45 ft "Z" sections-Florida
346 pcs. 45&40 ft Beth DP2-New York
103 pcs. 20-19 ft Inland I22-Tennessee

Other lengths & sections used & new at other locations in United States for rent.

We have Nation-wide reputation for effecting QUICKEST SHIPMENTS

All sizes Vulcan & McKiernan Pile Hammers & Extractors for rent—Shop Rebuilt

Regardless of location of job, Wire, Write or Phone

MISSISSIPPI VALLEY EQUIPMENT CO.
511 Locust St. St. Louis, Mo.
Chestnut 4474

PILING

STEEL SHEET **PILING**
LARGEST *RENTAL STOCKS* IN U.S.

The exact lengths and sections of Steel Sheet Piling to meet all needs—shipped *FASTER From FOSTER.* RENT Corrugated Steel Piling, Pile Hammers & Extractors.

• RAILS • PIPE • WIRE ROPE

L.B. FOSTER CO.
Pittsburgh 30, Pa. New York 7, N. Y.
Chicago 4, Illinois Houston 2, Texas

LORAIN 820 Diesel 2 cy Shovel, built 1948
NORTHWEST 4 cus 1 cy Backhoe and 50' Crane
CAT'R D-7 bulldozer 1T series, also w/scraper
INT'L. TD-18 cable & hydraulic bulldozers
INT'L. TD-14 hydraulic bulldozer
ALLIS-CHLS. HD-5 shovel dozer
New AMSCO 1-½ cy Dipper for Lorain 80
Critical CAT'L. & INT'L. tractor parts

BENDIX MACHINERY CO., INC.
401 Broadway, New York 13 Canal 6-5693

FOR SALE
LIDGERWOOD HOISTS

1—Single drum automatic tension hoist, originally used as a mooring winch. Serial 5819. 16,000 Pounds at 80 ft. min. Gear ratio, 60.46 to 1. Motor: G.E. CO-1829, 50 HP, 750 RPM, 230 Volts D.C., Series Wound. With solenoid brake, hand release lever, automatic control. Drum grooved to coil 1500 feet of 9/16" rope.

2—Single drum winches. Serial Nos. 5820 and 5821. 5000 pounds at 200 ft./min. Gear ratio, 18.74 to 1. Motor: G.E. CO-1828, 35 HP, 750 RPM, 230 Volts D.C., Series Wound. With solenoid brake and automatic control. Drum grooved to coil 1500 feet of 7/16" rope.

ELECTRIC GENERATOR & MOTOR CO.
4533 Hamilton Avenue, Cleveland 14, Ohio

STEEL
SHEET PILING
will roll to size and specifications
AMERLUX
STEEL PRODUCTS CORP.
100 PARK AVENUE
NEW YORK 17, N. Y.
DIRECT MILL OFFICE OF THE
ARBED
STEEL MILLS IN LUXEMBOURG

STEEL SHEET PILING
700 pcs Beth DP2—45, 40, 30 & 25 ft.
200 Tons Beth ZP38—26 to 30 ft.
2200 Ton Z-27 and 32-40 ft.
43B & MARION 32 STEAM CRANES
DARIEN, 60 E. 42nd St., N. Y., N. Y.

STEEL SHEET PILING
Available from N. Y. stock
Will also roll to size and specifications

LARSSEN PILING CORP.
21 West St., New York 6, N. Y.
***Phone:* HA 2-2280**

FOR SALE

5—Bottom Dump Euclids G-M Powered

13 Cubic Yard Capacity Rebuilt

$13,000.00 EACH
F. O. B. MEMPHIS, TENN.

EUCLID MEMPHIS SALES
P. O. Box 2493 185 E. Butler
Memphis, Tenn.
Phone 8-0491

These are Alvin Hall's Units

FOR SALE

NW 80D Shovel Drag #12890
NW 104 Backhoe Attachment used
6—43FDT Euclid bottom Dumps
9—18LDT Euclid Bottom Dumps
4—500 CFM Ingersoll Rand Compressors
9—27 FD Euclid end dumps
5—49 FD Euclid end dumps
3—28 FD Euclid end dumps
1—Bucyrus Erie 22B with four fronts. Like new.
1—Osgood 200 backhoe & drag
1—804 Lima backhoe & shovel
1—4500 Manitowoc Dragline 1950
Lorain M. C. 414 Truck Cranes No. 17520
Osgood Model Victor 1½ Yd. Drag
2—Model T. D. Euclid End Dump

The Charles M. Ingersoll Co.
19930 Detroit Road Rocky River, Ohio

FOR RENT OR SALE:

D-8 Tractors 1-H Series, with or without bulldozers.
Browning Truck Crane 15T—1947.
604 Lima Shovel, late 1948.
4 DW 10s—Scrapers and Tractors 1949.
22 Cement containers.

JOHN B. SCHULTZ CONTR. CO., INC.
316 Crestwood Ave., Buffalo 16, N. Y.
'Phone Delaware 8011.

In real life the heroine in the buckboard doesn't outdistance the villain on horseback. Neither does the poorly equipped contractor outdistance the one who has plenty of MODERN Equipment from E. C. A.

CRAWLER CRANE

1—¾ yd. Model LS-75 Link Belt crawler crane, Ser. No. 1592. Equipped with 55' boom and 15' jib, powered by Waukesha gas engine size 4¼x4¾", Mdl. 6MZR37E, 1250 RPM. EXCELLENT CONDITION.

Prices of these Compressors have been reduced to clear room for inventory stock in our Rental Department.

PORTABLE—TWO STAGE

2—315' Chicago Pneumatic #28946 and 40086, 6 cylinder Hercules gasoline engines, solid rubber and pneumatic tires. Price $3,000.00 each

1—315' LeRoi Mdl. 315G #209350, RXI gasoline engine #209325, 4 pneumatic tires. Price $3,000.00

1—210' Chicago Pneumatic #34298, 6 cyl. Hercules gasoline engine. Price $2,400.00

1—210' Gardner Denver #87582, Buda FRH gasoline engine, 4 pneumatic tires. Price $3,500.00

1—160' Chicago Pneumatic #32689, 6 cyl. Hercules gasoline engine. Price $1,800.00

CONVEYOR

1—24"x104' Barber Green trough type conveyor, 10 HP 220-440 V, 3-ph, 60-C motor, without belt. Price $1800.00

MIXERS—CONCRETE

1—10S Koehring Dandie Mixer, 4 cyl. air cooled engine, 4 steel wheels, side loader and water tank, 4000#. Price $1000.00

1—7S Jaeger Mixer Model 7EL, 2 cyl. Hercules engine, 2 pneu. tires, side loader and water tank, 3800# Price $850.00

TRENCHERS

1—Mdl. 200 Parsons Trenching Machine, Ser. No. 1774, powered by 6 cyl. Waukesha gas engine, mtd. on crawlers, with buckets to cut trench 21" wide up to 5'6" deep. Wheel type. New in 1947.

1—Mdl. 12 Buckeye Trencher, Ser. No. 12, crawler mounted, powered by 6 cyl. Buda gas engine, will dig 24" wide up to 5'6" deep. Wheel type. New in 1946.

1—Mdl. 203 Badger trencher, ladder type, Ser. No. M-39, mounted on crawlers. Has 6", 8", 12" and 24" buckets. Equipped with two booms, one for a maximum of 6'6" deep, other 9'6". New in 1947.

ALL VERY GOOD CONDITION.

Partial List Only—Send for Stock List—We Buy, Sell and Rent

CLIFTON HEIGHTS, PA.
MA dison 6-2200

30-J Church St.
Phone Worth 2-0036
NEW YORK 7, N. Y.

1155 So. Washtenaw Ave.
CHICAGO 12, ILL.
Phone NE vada 8-2400

P. O. Box 933-J
PITTSBURGH 30, PA.
Phone Federal 1-2000

EQUIPMENT CORPORATION of AMERICA

BRIDGE
FOR SALE

Railroad Plate Girder Bridge now in use as Highway Bridge with temporary timber foot bridge for pedestrians on outside of one girder. Overall length 106'. Roadway width 11'. Clear width between girders at top 15'. Loading E40 at 18,000 pounds. Located Sault. Ste. Marie, Michigan. Available for shipment. Fall of 1951.

THE TULLER CONSTRUCTION CO.
RED BANK, NEW JERSEY

FOR SALE

45 ton G. E. diesel elec. locomotive
15 ton Davenport diesel locomotive
25 ton Browning loco crane new 1942
Two Colby 50 ton gantry cranes
110 HP American 3 drum gasoline hoist
1½ Blaw Knox clamshell buckets new
8¼ x 10 Clyde 3 drum steam hoists new
¾ yd Bucyrus 20-B diesel crane
5 new International T-D-24 tractors

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis 1, Mo.

LOCOMOTIVES

1—Porter 14 Ton 36" Ga Gas.
1—Davenport 35 Ton Diesel-Elec. Std. Ga.
2—Whitcomb Gas 24" Ga.—6 Ton.
Brookville—10 Ton Diesel—30" Ga.—Used 900 Hrs.
4—Plymouth 20 Ton Gas.—36" Ga.

LOCOMOTIVE CRANES

1—Ohio—30 Ton Coal Fired.
1—Ohio—35 Ton—#4189—NEW 1942—Oil Fired.
1—Type G Industrial 25 Ton—Steam.

MISCELLANEOUS

26—Hopper Cars—15 Ton—36" Ga.

A.C. 600KW-2300/3/60 Generator direct connected Superior 800 HP Diesel. Rare Bargain

1—Flory D. D. Slope Hoist 150 HP—3/60/220.
1—Mundy D. D. Hoist—300 H. P.—230 D.C.

R. H. BOYER
2005-13 W. Bellevue St. Phila. 40, Pa.
Phone Sagamore 2-7132

USED 1946 FEDERAL TRACTOR, tandem axle, 10.00 x 20 12-ply tires, Cummins HH600 Diesel engine, recently overhauled, with 60-ton Rogers lowboy, tandem axle, 16 tires, 7.50 x 18, 14-ply. FOB present location $11,000.00

K-12 INSLEY BACKHOE ATTACHMENT, excellent condition. FOB present location ... $2,250.00

33M MARION DRAGLINE, GM 3-71 engine, swamp crawlers, 40 ft. boom, 1-yd. L8 Hendrix bucket, 2½ years old. In excellent condition. FOB present location $14,000.00

33M MARION DRAGLINE, GM-4-71 engine, swamp crawlers, 40 ft. boom, 1-yd. L8 Hendrix bucket, 2½ years old. In excellent condition. FOB present location $15,000.00

TRI-STATE EQUIPMENT CO. INC.
520 So. Mulberry
Memphis, Tennessee

NEW and REBUILT
STORAGE BATTERY
LOCOMOTIVES
1½ to 10 Ton — 18" to 56" Track Gauge
GREENSBURG MACHINE CO.
Greensburg, Penna.

VULCAN
PILE HAMMERS AND EXTRACTORS
NEW OR FACTORY REBUILT
FOR SALE • • • FOR RENT
327 N. BELL AVE., CHICAGO, ILL.

DEPENDABLE USED MACHINES

Special.—International I-4 with Hough front end loader, used only 3 months

Universal truck crane	Lorain 40 shovel and dragline	Diamond 24x36 crusher
Lorain ¾ yd. backhoe	Browning 20 ton erector's crane	Morris 10" gravel pump
Badger ditcher	All steel stiff leg derrick	Erie 8" sand pump
Eagle bucket loader	Gallon Junior patrol grader	Pioneer 3x10 screen
Speeder LS-60 dragline	30', 36" gauge switches	Eagle coal crusher

For rent,—cranes, draglines, backhoes and all accessories.

10002 Southwest Highway **TRACTOR & EQUIPMENT CO.** Oak Lawn, Ill.

1—Wayne-Crane-Dragline—8 tires—35 Ft. Boom, New 1946

1—Austin-Western-Crushing portable plant 30x18 Roll 3x8x2 Deck Screens—Conveyors, Etc. Buda Gas-Power

1—Badger Trencher—Model 203—Full Tracks—Gas Power—Hydraulic—All Attachments—New 1947—Had 30 days service

1—A.C. Patrol Tandem Grader—Model 42 Gas Power

DONALD B. MacNEAL

12100st and Loomis St. CHICAGO 43, ILL.

Telephone: PUllman 4-3411—TRiangle 4-1236

SURVEYING INSTRUMENTS

USED • REBUILT • SALE

RENT • REPAIRING

FROM STOCK

Brand New & Rebuilt

TRANSITS & LEVELS

Fully equipped modern shop—all makes and models repaired — all work guaranteed — instruments rented

Midwest Representative: W. & L. E. Gurley

NATIONAL BLUE PRINT CO.

Established 1914.

210 S. Canal St. Chicago (6), Ill.

1—Ransome 27E Paver with 32' boom—new.
1—Barnes 40M pump mounted on steel wheels, powered by Le Roi engine, guaranteed.
1—DeWalt Model GRR radial arm saw with 5 h.p., 3 phase motor, guaranteed.
1—Fay and Egan #950 ball bearing 30" high speed band saw with 7½ h. p., three phase, 220 volt motor. Guaranteed.
1—Worthington 105 cu. ft. Diesel-driven compressor with electric starting, mounted on pneumatic tired wheels. Guaranteed.
1—Rex 160 double pumpcrete with 1000' pipe, elbows, bends, all other accessories. Also included is approximately $2,000.00 in spare parts. Excellent condition.
1—Sassen 18' derrick complete—new.
1—Williams ⅜ yd. clamshell bucket. Used.
1—Wellman 1½ yd. clamshell bucket. Used.
1—Vaun ¾ yd. dragline bucket. Used.
1—Page 1 yd. dragline bucket. Used.
1—Archer heavy-duty double steel tower, 165', with 1¼ yd. concrete bucket, tower hopper, three-wheelbarrow platform, bolts, and nuts, near new, well painted.
1—O. K. portable tower and hoist outfit—four 10' sections tower, powered by Wisconsin 25 h. p. engine. Guaranteed.
1—1950 Chevrolet heavy-duty two-ton truck, 12' stake body. Equipped with Daybrook tailgate lift. New guarantee.

Nesbitt Equipment Company

451 Calvert Avenue Alexandria, Virginia

P. O. Box 11 Tele: OVerlook 3886

FOR SALE

Unused 60 ft. Northwest 80D Boom, Fair Lead, Swivel Hook Block $1400.

Unused D-6-N Hyster Winch $1500.

Heil Scraper, 12 yd. Hydraulic $500.

MixerMobile, 2 yd. $3800.

Lorain 40A Chain Crowd Shovel or with Hoe attach. $5800.

Cletrac B with Sargent Overhead Loader ⅝ Yd. $3800.

Hanson Model 31 Hoe and Crane used 400 hrs. one-half new price.

IRVING HEATH

Kirkwood, N. Y. Phone Binghamton 2-8648

REPAIRS

All Makes

TRANSITS • LEVELS

Repaired, Rebuilt, Rented, Bought, Sold.

All Work Guaranteed

Precision Circular Graduating

BRUNSON INSTRUMENT CO., Inc.

1405 Walnut St., Kansas City 6, Mo.

Manufacturers of survey instruments with the famous patented Brunson Ball Bearing Base.

LASTING **BRUNSON** ACCURACY

FOR SALE—REASONABLY PRICED

5 25-TON LOW BOY TRAILERS
1 "I" BEAM 75 TON TRAILER
3 6-WHEEL TANDEM CHAIN DRIVE STERLING TRACTORS
Condition Good To Excellent

SAW MILL SUPPLY INC.

937 Saw Mill River Road Yonkers, N. Y.
YONKERS 5-0440

DIESEL GENERATOR SET

120 KW AC 3 phase

60 cycle 120/208, 240, 480 volt

Complete new unit available for immediate delivery.

FRANTZ EQUIPMENT COMPANY

50TH & WYNNEFIELD AVENUE
PHILADELPHIA 31, PENNA.
GReenwood 7-7200

CONCRETE PLANT

AVAILABLE IMMEDIATELY

Complete 300-ton capacity Ready-Mix plant in excellent condition. Plant includes bulk cement handling equipment, 2 yard aggregate weigh-batcher, separate 25 cu.ft. cement weigh-batcher, 180 ft.-24" belt conveyor, etc. Complete details upon request.

Our price $18,500 f.o.b. Cars
Estimated re-erection cost $1750

FLEMING MANUFACTURING COMPANY

4985 Fyler Avenue St. Louis 9, Mo.
Phone FLanders 7800

TRANSITS AND LEVELS

New or Rebuilt Sale or Rent

Headquarters for REPAIRS — any make — Factory Service. We will also *buy* your old instruments or take them in *trade*. A complete line of Engineering Instruments and Equipment for field or office. Write for catalog N.R. 1-5.

WARREN-KNIGHT CO.

Manufacturers of Sterling Transits and Levels

136 No. 12th St., Philadelphia 7, Penna.

FOR SALE

Cat. D-8 2U Series, Cable Angledozer, $5,000.00 spent in re-building. Guaranteed.

C. P. 315 Air Compressor and Wagon Drill Cat. 8800 Engine. 1400 hours. Mounted Dodge 4 x 4 Hose, steel, bits (new & used) included. Machine like new.

Jeep Mounted Schram 105 Air Compressor: Perfect Condition.

KOFMAN'S

130 Dunlap Street Bellefonte, Pa.

FOR SALE

1 Barber Greene Finishing Machine.
1 Galion 10 ton 3 wheel Roller, 24" Rear Roll.
1 Galion 303 Motor Grader.
1 800 Gal. Water Tank & Pump, Truck Mounted, Graybar.
1 Littlefort Traction Driven Road Broom.

All of above equipment practically new. No piece used over 60 working days. Perfect condition. Write

J. R. REYNOLDS ASPHALT PAVING CO.

Canadensis, Pa. Tel.—Cresco, Pa. 5251

ALL MAKES

RE-BUILT REPAIR RENT REAL EXPERTS

BUFF

69 Day St., New York

SPECIALIZED REBUILDING

of surveying and engineering instruments

All makes and models expertly repaired in modern shop. All work guaranteed.

USED REBUILT INSTRUMENTS

for sale or rent

ROY D. HICKERSON

8 N EDMONDSON AVE INDIANAPOLIS 19, IND

FOR SALE

1—LeTourneau Dozer, Model C, Serial #LD 2195 C2 B.
1—2¼ yd. Esco coal bucket—never used.
2—2yd. drag buckets.

TIPTON STANLEY

Phone 77 L, Bridgeport, R 3, W. Va.

BARGE CRANE

30-ton revolver on 112' steel barge. 120' boom. Buda diesel power. Unused Surplus.

FS-9683, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

TRANSITS AND LEVELS

PRICED APPROX. ⅓ THEIR VALUE

• *NEW, FULLY GUARANTEED* •

AVAILABLE FOR IMMEDIATE DELIVERY

• *WRITE FOR DETAILS* •

HAROLD N. LEARNED

34-55 Upton Ave. N. Minneapolis, Minn.

FOR SALE 75 TON RAILWAY CRANE

INDUSTRIAL — BROWNHOIST — STEAM

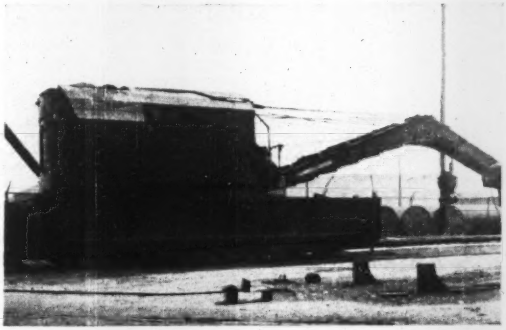

railway crane, 75 ton rating with wrecking type curved boom 25 feet long, 2 hoist, 16 inch diameter drums, manual control. Crane is equipped with vertical firetube boiler, turbo-generator lighting and Westinghouse air brake equipment. Crane is mounted on (2) 6 wheel trucks with 5 inch x 9 inch journals and 33 inch diameter wheels, 56½ inch gauge. Serial no. 11529.

LURIA BROTHERS & COMPANY INC.
Industrial Equipment Division
Lincoln-Liberty Bldg. Rittenhouse 6-7455 Philadelphia 7, Pa.

FOR SALE

S-1668 (A) IHC TD-18 74" Wide Tread Crawler Tractor w/Bucyrus Erie 18WG Hydraulic Bull-trader. Completely reconditioned.
SALE PRICE FOB LOUISVILLE, KY. .$9850.00

S-1525 (B) IHC TD-18 Crawler Tractor 74" Wide Gauge w/Bucyrus-Erie 18CWD Cable Bulldozer and Heil S-2 Power Control Unit.
SALE PRICE FOB LOUISVILLE, KY. $8000.00

S-1709 (B) IHC TD-18 Tractor equipped w/Heil Angle Blade and S-2 Power Control Unit. Tractor repairs include new rings, in engine, new valves, checked, serviced and painted.
SALE PRICE FOB LOUISVILLE, KY. .$9500.00

S-1648 (A) IHC TD-18 74" Wide Gauge Crawler Tractor w/Isaacson Cable Bulldozer and Heil S-2 rear mounted Double Drum Power Control Unit. Reconditioned.
SALE PRICE FOB LOUISVILLE, KY. .$9980.00

BRANDEIS MACHINERY & SUPPLY CO.
Brooks & Warnock Sts. Louisville 8, Ky.
CAlhoun 4741

FOR SALE

DREDGES

H. P. GUION
303 W. 42nd St., N. Y. 18, N. Y.

! ! ! NOTICE ! ! !

For good used construction machinery, save time. Use our experience.

Mail your inquiry now, large or small. NO OBLIGATION.

GENERAL EQUIPMENT CO.
133-18 227 St. Laurelton, L. I., N. Y.

LONG ISLAND STRUCTURAL STEEL CO. INC.
400-410 TIFFANY STREET, BRONX 59, N. Y.
KIpatrick 2-5300
New and Used
BEAMS—ANGLES
CHANNELS—PLATES
Bought and Sold

FOR SALE

I BEAMS

8" I	18.4#	40'
10" I	35#	40'
12" I	31.8#	40'/48'
15" I	42.9#	40'/48'

BEARING PILES

8" x 36#	to	48#	30'/40'
10" x 42#	to	72#	30'/40'
12" x 53#	to	106#	30'/40'

ALBRO STEEL COMPANY
47-29 Van Dam Street
Long Island City, N. Y.
Stillwell 4-2720—6-5448

FOR SALE

1 28 Cu. Ft. Knickerbocker Building Mixer with Continental Gas Engine & Power Type Skip—$3800.00

1 27-E Multi-Foote Paver with Continental Gas Engine, Boom & Bucket—$3500.00

Both in excellent condition. May be inspected at our warehouse.

THE DAY & MADDOCK CO.
8201 Almira Ave. Cleveland, Ohio

STOCK LIST

D-6 9U1400 series, less than 800 hrs.—CAT. bulldozer & CAT. DDPCU
D-6 9U900 series, less than 1000 hrs.—CAT. bulldozer & CAT. DDPCU
D-6 9U1676 series, less than 1718 hrs.—BROS hydraulic angledozer. Being rebuilt—can supply either hyd. or cable dozer
D-7 7M7600 series 594 hours—CAT 25 DDPCU
D-7 3T12200 series 616 hours—CAT 25 DDPCU
D-7 3T12100 series. With R75 rebuilt LA-PLANT CHOATE blade
D-8 8R1104 series. Being rebuilt—new CAT 8A dozer & new 25 DDPCU
D-8 8R3111 series. Being rebuilt — can supply any type blade
D-8 2U1900 series. Rebuilt — CAT. 8S blade & 25 DDPCU
D-8 2U5000 series. Rebuilt — CAT 8A blade & 25 DDPCU
D-8 2U5700 series. Rebuilt—CAT 8S blade & 25 DDPCU
D-8 2U7500 series. Perfect, 1400 hours —CAT 8A blade & 25 DDPCU
D-8 2U9700 series. Like new, 604 hours —CAT. 25 DDPCU
D-8 2U10000 series. Like new, 363 hours—CAT. 8A blade & 25 DDPCU
D-8 2U10400 series. Available bare or with bull or angledozer
D-8 2U10700 series. Available bare or with bull or angledozer
TD-18A 1950 Machines, equipped with Bucyrus Erie Hydraulic Bullgraders, used less than 1200 hours, condition like new, an exceptional buy! (4 Units available)

All the above equipment has been thoroughly reconditioned and is in condition equal to new. We also have other offered equipment in stock such as graders, scrapers, etc. List on request.

Above Machines Offered Subject to Prior Sale
We will take off blades or switch around to suit

EARTHMOVING MACHINERY CORPORATION
S. Third St. & Bosler Ave.
Lemoyne, Pa.
(suburb of Harrisburg)
Mail Address:
P. O. Box 1100

WANTED

WANTED

HYSTER WINCHES
D7N and D8N

•

TOW GRADERS
Caterpillar 44

•

SHOVELOADERS
Allis Chalmers HD-5G

•

MOTOR GRADERS
All Types

•

HERBERT DANN ASSOCIATES
INCORPORATED
Empire State Building - 70th Floor
350 Fifth Ave., New York 1, N. Y.

WANTED
40 Ton Low-boy Trailer

For single axle Tractor, equipped with out riggers. State age, make, condition, and price. Must be of legal width for licensing in State of Pennsylvania.

KOFMAN'S
Bellefonte, Pa.—4739

WANTED
1 Electric Motor, 400 HP, 450 RPM, 3 Phase, 60 Cycle, 440 Volts, Slip Ring.

IVAN M. MARTIN, INC.
Blue Ball, Pa.

WANTED
Page Automatic Type RH or RHD
DRAGLINE BUCKET
1½ or 2 cubic yard capacity for delivery in Michigan.

TULLER CONSTRUCTION CO.
P. O. Box 431 Red Bank, New Jersey

WANTED
3 Gardner Denver 500 CFM Portable Compressors; late model, diesel driven. Would consider Ingersoll Rand.
1 Model 6 Northwest for parts, also a complete Northwest Model 6 base.

FRANK A. BARKEY
851 Coxwell Ave. Toronto 6, Ont.

FOR SALE
TD-18 Tractor with Bucyrus-Erie hydraulic blade, new 1949 condition excellent.
TD-9 Tractor with Bucyrus-Erie hydraulic blade, new 1948 condition excellent.
Bay City 30 chain crowd shovel, condition excellent.
CHE Triton roller as good as new.

WANTED
45 foot Boom with 1—20 ft. or 2—10 ft. inserts for Lima Model 34 Paymaster.

HAROLD MacQUINN
Bar Harbor, Maine Phone 769

FOR RENT

For Rent
SPEEDCRANES
LATE MODELS

Manitowoc Diesel Powered Speedcranes for rent. 25, 40 and 60 ton capacities with booms 100' or more, 20' and 30' jibs. Special price on long rentals.

FORSYTHE EQUIPMENT CO., INC.
37-11 Vernon Blvd. Long Island City, New York
Tel. STillwell 4-1030

FOR RENT
MANITOWOC SPEEDCRANES

Late model combination shovels, cranes & draglines. 1¼ to 2½ cu. yd. capacities, 25 to 60 ton lifting capacities, 60 to 80 ft. booms, Diesel powered, complete with light plants.

Special rates on long-term rentals

McCARRICK BROS.
1700 E. Ridge Pike Norristown, Pa.
Box 291 *Tel. Norristown 4231*

FOR RENT
NEW AND ALMOST NEW
MANITOWOC SPEEDCRANES
2½ Cu. Yd.—60 TON CAPACITY
Clemens Construction Company
P. O. Box 266 West New York, N. J.

FOR RENT
One ten ton Moto Crane, Four winch trucks with Tulsa 34 winches, One ten ton 28½' trailer, One 1950 Ford pickup. Equipment in Excellent condition. Special rate if all taken on same job.

FR-9612, Engineering News-Record
68 Post St., San Francisco 4, Calif.

For rent on long time lease
80D Northwest Dragline and Crane combination
New machine available in approximately 30 days.
Telephone 8-0194, at
447 Ins. Exch. Bldg., Des Moines, Iowa

FOR SALE
3—CATERPILLAR D-7 Bulldozers, Cable Blades
1—LeTourneau Model LP Scraper, Never used
1—¾ Yd. Buckeye Shovel G.M.C. Diesel, Crane Boom and Fairleads 85% New
1—Caterpillar Model #12 Grader, Cab and Scarifier 9K Series, Excellent Condition
1—Barber Green Loader

CALL FREEPORT N. Y. 8-1667
or
FS-9140, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

FOR SALE
1—Model S112 Bucyrus Scraper Ser. #26444 Excellent Condition—$4,500.

Campanella & Cardi Const. Co.
780 Jefferson Blvd. Hillsgrove, R. I.

FOR SALE
Used Dragline Buckets
1—Page — 4½ cubic yard
1—Red Arch — 5 cubic yard
3—Red Arch — 6 cubic yard
1—Red Arch — 7 cubic yard
Need repairs — will sell as is.

FS-9634, Engineering News-Record
330 W. 42 St., New York 18, N. Y.

PIPE

EST. 1904
DAVIDSON
PIPE COMPANY INC.
FORMERLY
ALBERT & DAVIDSON PIPE CORP.
ONE OF THE LARGEST STOCKS IN THE EAST
Seamless and Welded ⅛" to 26" O.D.
All wall thickness Manufactured.
Specialty large sizes.
Cutting — Threading — Flanging — Fittings — Valves.
Call GEdney 9-6300
50th St. & 2nd Ave., B'klyn 32, N. Y.

Albert — Rings the Bell

PIPE AND ACCESSORIES
IF IT'S MADE, WE HAVE IT!
Seamless and Welded—Every Size and Wall Thickness—Cast and Wrought Iron, Steel, Alloys
POWER PIPE FABRICATING
Bending, Coiling, Flanging, Threading, Beveling, Lining, etc.
Valves & Fittings
Piling & Fittings
Culverts
SPEED-LAY PIPE SYSTEMS
Write for brochure

ALBERT
PIPE SUPPLY CO., INC.
Berry at North 13th St.
Brooklyn 11, N. Y.
Phone EVergreen 7-8100

PIPE
VALVES and FITTINGS
All Sizes in Stock
NEW-USED
GREENPOINT IRON & PIPE CO. INC.
Bogart and Stagg Streets Brooklyn, N.Y.

FOR SALE

1—Caterpillar D8 Tractor S/N 8R9007. Equipped W/LeTourneau P.C.U. Tractor over-hauled and painted.
1—LeTourneau LP Scraper S/N S-26328 LPF.
1—Caterpillar D8 Tractor S/N 1H8782. Equipped w/LeTourneau P.C.U. Tractor over-hauled and painted.
1—LeTourneau LP Scraper S/N S-8201 LPD.

Write or Call

M. L. JOHNSON
112-32nd St. Dr. S.E.
Cedar Rapids, Iowa

Marion 5-yard electric shovel Model 151-M. New 1947, excellent condition, high-lift front. Price loaded on cars, f.o.b. Western Pennsylvania $160,000.00

Also all size shovels, draglines and bulldozers available for immediate delivery.

Phone evenings Somerset, Pa., 6436
R. W. Murphy, or
Write Box 561, Somerset, Pa.

For Sale:

INTERNATIONAL TD-9 HI-LIFT

New Moy, 1947. Reconditioned.

KEYSTONE CONSTRUCTION CO.
Meadville, Pa.

MONIGHAN WALKING DRAGLINE

MODEL 3T

Capacity—Three cubic yard—Page Bucket. For dragline work or conversion as revolving Crane on Barge—immediate inspection, demonstration and delivery. Seeing is believing.

J. B. FRASER & SONS, INC.
Fort Lauderdale, Florida Phone 2-0691

CONTRACTORS' EQUIPMENT

2—Complete Concrete Paving and Grading Outfits. Ready for use.
(Above located in Cincinnati, Ohio)
Cranes — Pavers — Cats — Euclids, Etc.
Located in Lansing, Michigan.

V. F. MASHEK
208 So. La Salle St. Chicago, Ill.
CEntral 6-4533

EXCESS EQUIPMENT

FOR SALE

2 Model HF Hough Payloaders, ¾ c.y.
1 Model T6K Michigan Truck mtd. ½ c.y. Backhoe.
1 Leroi Tractair 105 cfm Compressor, equipped with Leroi wagon drill.
1 Worthington 105 cfm Compressor, 4 pneu. tires.
1 Worthington 315 cfm Compressor, 4 pneu. tires.
1 300 amp. electric Hobart shop welder.
1 Rex. 1½" Water Pump
1 Gardner Denver 2" air powered water suction pump.
1 Gorman Rupp 2" water pump.
1 Giant Pipe Pusher.
1 Mueller Pipe Tapping Machine.

All equipment practically new and in excellent condition.

Susquehanna Paving Materials Co.
137 So. Second St. Sunbury, Penna.

FOR SALE

5—15 CY St. Paul Dump Bodies
5—3 CY Dump Bodies
1—1500 Gal. Etynre Distributor
1—5 Ton Tandem Roller
1—Apsco Widening Machine
1—Haiss Bucket Loader
1—T.D. 18 International Tractor and Dozer
1—60 Ton Rogers Semi-Trailer
1—Mack Tandem Drive Truck Tractor

DICKERSON, INC. Monroe, N. C.

FOR SALE or RENT

1—Northwest mdl. 95 Northwest dragline
1—Northwest mdl. 25 Northwest dragline
1—Huber Motor Patrol

All in good, clean condition

FS-9477, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

FOR SALE
VERY REASONABLE

1 Lorain model 36—half-yard shovel; 1 Northwest model 105 1-yd. comb. shovel & crane; 1 International bulldozer model TD-14; 2 model 35 Caterpillar bulldozers; 1 Austin-Western gas roller, 12 tons.

S. F. PANDOLFO CO.
444 Asylum St. Hartford, Conn.
Tel. 6-9614

RAILS-TIES

TRACK ACCESSORIES

NEW AND RELAYING **RAILS**
"FASTER From FOSTER"

Largest stocks in U.S.—New and Relaying Rails, Track Tools and Accessories. All your trackage needs — new installations or replacements filled *"FASTER from FOSTER." All material backed by Foster Guarantee.* Write for Catalog.

• STEEL SHEET PILING • PIPE

L.B. FOSTER CO.
Pittsburgh 30, Pa. New York 7, N. Y.
Chicago 4, Illinois Houston 2, Texas

EVERYTHING FOR THE TRACK FROM
SWITCH TO BUMPER

NEW & RELAY RAILS
IN STOCK
12# THRU 130# SECTIONS
ACCESSORIES & SWITCH MATERIALS
Inquiries Serviced Promptly

MORRISON RAILWAY SUPPLY CORP.

RAND BLDG. BUFFALO 3, N. Y. EMPIRE BLDG. BIRMINGHAM 3, ALA.

NEW—RAILS—Relayers

All sizes and weights. Also frogs, switches, spikes, bolts, tie plates, contractors' and mine equipment carried in stock.

M. K. FRANK
480 Lexington Ave. New York, N. Y.
Reno, Nevada
Pork Bldg. Pittsburgh, Pa.
Carnegie, Pa.

PROFESSIONAL SERVICES

Duval Engineering & Contracting Co.

General Contractors

FOUNDATION BORINGS
For Engineers and Architects.
Jacksonville, Florida

Consoer, Townsend & Associates

Water Supply, Sewerage, Flood Control & Drainage, Bridges, Express Highways, Paving, Power Plants, Appraisals, Reports, Traffic Studies, Airports, Gas & Electric Transmission Lines.
351 East Ohio St., Chicago 11, Illinois

Soil Testing Services, Inc.

Theo. W. Van Zelst Carl A. Metz
John P. Gnaedinger

Soil Borings Rock Coring
Engineering Testing of Soils
Soil & Foundation Reports
4520 W. North Ave. Chicago 39

Metcalf & Eddy

ENGINEERS

Investigations Reports Design
Supervision of Construction
and Operation
Management Valuation Laboratory
Statler Building 111 Sutter St.
Boston 16 San Francisco 4

Long Island Dredging Co.

Consulting Engineers

Investigations — Reports — Plans — Specifications — Estimates — Supervision

DREDGING OPERATIONS
171-18 Liberty Ave. Jamaica 5, N. Y.

Severud-Elstad-Krueger

Consulting Engineers

Structural Design - Supervision
Reports Buildings - Airports
Special Structures
415 Lexington Avenue
New York 17, N. Y.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Water Works, Sewage, Industrial Wastes & Garbage Disposal — Roads, Airports, Bridges & Flood Control, City Planning, Traffic & Parking, Appraisals, Investigations & Reports.

Harrisburg, Pa.

Branch Offices
Scranton, Pa. Pittsburgh, Pa.
Medellin, Colombia, S. A.
Daytona Beach, Fla.
Havana, Cuba

Albright & Friel, Inc.

Consulting Engineers

Water, Sewage and Industrial Waste Problems, Airfields, Refuse Incinerators, Power Plants, Industrial Buildings, City Planning, Reports, Valuations, Laboratory.
121 So. Broad St., Philadelphia 7, Pa.

Frederick H. Dechant

Consulting Engineer

Chairman of the Board,
Frederic R. Harris Inc.
Water Works, Industrial Wastes, Sewerage, Recovery Processes, Hydraulic Works, Gas Plants
Phila.: Fidelity Phila. Trust Bldg.
New York: 27 William St.

Lawrence A. Leary & Co.

Consulting Engineers

Brickwork & Masonary Constr. Problems
Surveys • Quantity • Safety & Inspection
Mortar Specifications
Box 269, Wayne, Penna.

Inspecting and Testing

Johnson Soils Laboratory

Engineering design and construction tests run for MOBILE LABORATORY UNITS at construction site. Field load bearing tests.

4595 Palisades Ave., New York 63, N. Y.
Kingsbridge 3-5727

REMEMBER ! !

You can depend on these consultants for a fast, accurate solution to your problems.
Consult them when necessary.

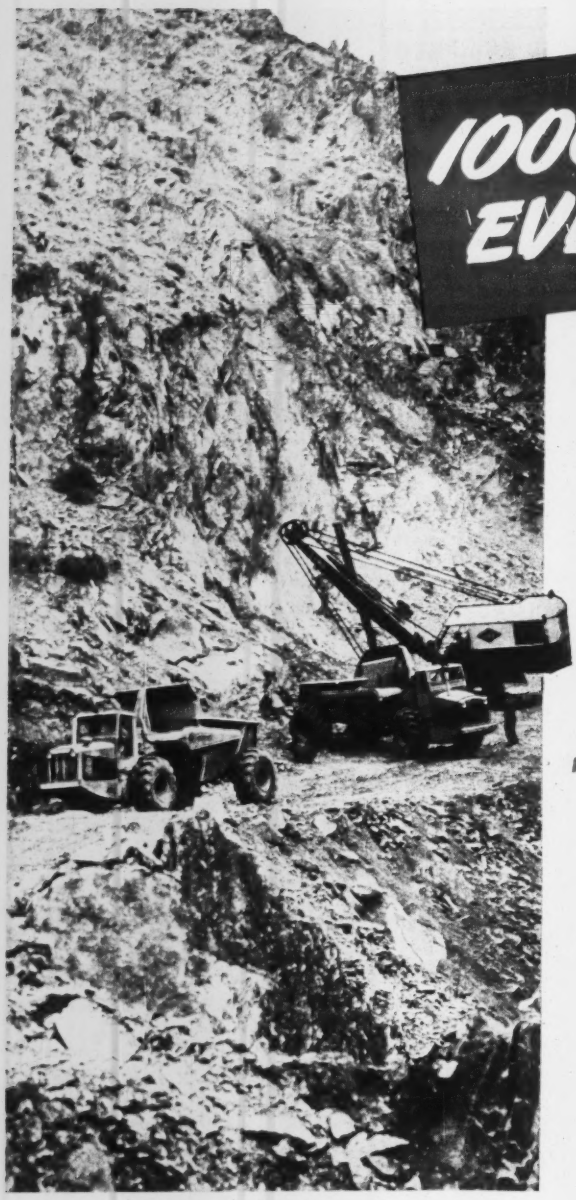

1000 YARDS EVERY SHIFT

ON one of the northwest's toughest highway jobs—relocating 4.4 miles of U. S 2 along the steep sidewalls of rocky Pine Canyon, near Wenatchee, Washington—Goodfellow Brothers, Inc., assigned the most difficult hauling to 3 GM Diesel-powered 16-ton Tournarockers.

"They are working out *very* satisfactorily," said James B. Goodfellow. Powered by 186 H.P. 6-cylinder "71" engines, the rear-dump Tournarockers hauled 9 to 11 bank yards each trip. On one 2800-foot, one-way haul, job records show that the three GM Diesel-powered units easily handled shovel production of 1000 yds. every 8-hour shift—helping to keep the job on schedule despite steep grades, rough haul roads and confined hauling conditions at altitudes of 2000 feet.

Power at Every Downstroke

There are good reasons for this performance—rugged design and precision manufacture, two-cycle operation, a smooth flow of plenty of power, quick acceleration and the always-ready-to-go qualities of General Motors Diesels.

These engines are offered as standard or optional equipment in over 500 kinds of power machinery by 120 different manufacturers. They are backed by the experience gained in building more than 315,000 Series 71 units totaling over 48,000,000 horsepower.

For any equipment you buy or re-power, it will pay to specify GM Diesel power.

DETROIT DIESEL ENGINE DIVISION

SINGLE ENGINES . . . *Up to 275 H. P.* **DETROIT 28, MICHIGAN** MULTIPLE UNITS . . . *Up to 800 H. P.*

GENERAL MOTORS

GM GENERAL MOTORS DIESEL POWER

DIESEL BRAWN WITHOUT THE BULK

NEW PRODUCTS

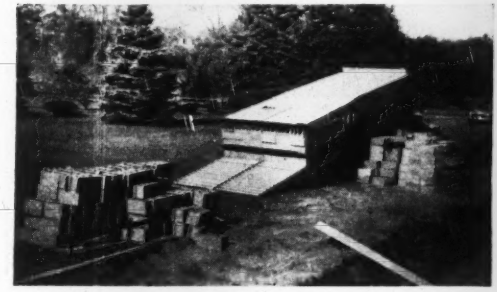

TRUCK UNLOADER speeds removal of concrete blocks

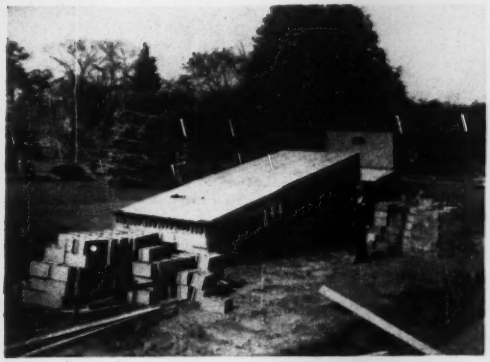

WINCH-and-brake assembly controls load till it reaches ground



TAILSKID acts as protection for load



WINCH LINE runs from forward sheave



BLOCKS are deposited quickly and neatly

Unloaders permit discharge of concrete blocks without spilling or breakage

TRUCK UNLOADERS for concrete and cinder blocks are built in models to fit all truck chassis and to carry from 6 to 10 cubes. Movement of the load during unloading is controlled by a winch and brake assembly mounted under the forward end of the platform frame. This winch and brake assembly is controlled by two brakes, either air or vacuum actuated, on the truck chassis. After the load comes in contact with the ground surface, the winch lines are removed and the vehicle is drawn forward, leaving the load in one complete pile.

Platform and tailskid are raised by hydraulic rams, power for which is transmitted through a power take-off and pump mounted on the transmission. The tailskid when raised to the vertical position acts as protection for the load, and shortens the over-all vehicle length.

A special binding device holds the two rear cubes of blocks so that they act as one, preventing spillage during unloading. It is removed after the load is deposited on the ground.

Special advantages claimed for the Rehberger Unloader include one-man operation, no helper is required on the truck or at the job site, unloading time of 5 to 10 minutes, no breakage or spillage, and less capital investment.—ARTHUR REHBERGER & SON, INC., 320 FERRY STREET, NEWARK 5, N. J.



Hoe-type mixer

Available with either gasoline or electric power, the 3-ft Hoe-Boy mixer is designed primarily for inside work right at the point of application. Features include: Triple hoe action; adjustable triple-blade mixing hoes; safety grating and bag splitter; self-aligning self-lubricating shaft bearings; heavy-duty electric-welded frame; machine-cut sprocket; and roller-chain drive. The Hoe-Boy is 29 in. wide, and has a 36¼-in. charging height and a 15-in. discharge.—CONSTRUCTION MACHINERY CO., GLENWOOD & VINTON, WATERLOO, IOWA.

Materials hoisting tower

Light-duty tower is composed of standard sectional scaffolding equipment. It comes complete with gasoline or electric power unit, guide rails, cable and pulley equipment, cage, and clutch. Available in heights to 120 ft.—WILSON-ALBRECHT CO., INC., 3568 WOODALE AVE., MINNEAPOLIS 16, MINN.



Block-making machine

Feature of the No-Pallet machine is that it automatically stacks 64 blocks on a rack, ready for removal and handling by a fork-lift truck. The machine is capable of producing 1,200

(Continued on next page)

RELIABILITY

R. D. Wood Gate Valves are especially designed for long underground service.

The well-known reliability of R. D. Wood Gate Valves is a direct result of their simplicity—the absence of parts that could give trouble. There are only three moving members—the spreader and two discs. In opening, the discs are lifted clear of the seats, leaving an unobstructed passage for the flow of water. In closing, they are wedged into place without distortion. No gadgets to go wrong, no pockets to collect scale and sediment.

A smoothly operating system is vital to every community. Let us show you how R. D. Wood Gate Valves make water systems more reliable, at the same time reducing maintenance to the minimum. Send for complete information today.

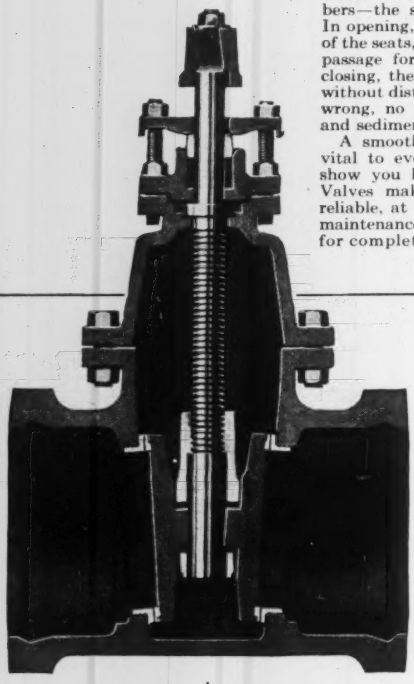

Seasoned castings. Rigidly inspected. Working pressure up to 175 lbs. Tested to 300 lbs. Conforming to AWWA specifications. Supplied with bell, flanged or mechanical joint pipe connections.

FOR PROPER FUNCTIONING OF YOUR SYSTEM
make sure that all valves are fully opened and closed at least once a year.

R. D. WOOD COMPANY
Public Ledger Building, Independence Square
Philadelphia 5, Pa.

Manufacturers of Mathews Hydrants and "Sand-Spun" Pipe (centrifugally cast in sand molds)

OHIO
LOCOMOTIVE CRANES
GASOLINE • DIESEL
ELECTRIC • STEAM

25 TO 40 TON CAPACITY
THE OHIO LOCOMOTIVE CRANE CO
BUCYRUS, OHIO

Diamond Core
Drilling
CORE BORINGS
for Foundations, Dams, Bridges and all Heavy Structures
GROUT HOLES
Tinney Drilling Co.
Grafton, W. Va.

blocks an hr. Under normal operation, the machine makes 3½ cycles per min, producing 6 blocks on each rack at each cycle.—GENERAL ENGINE CO., INC., GLOUCESTER, N. J.



Truck-mounted compressor

Model 125 compressor is now available for truck mounting and truck engine drive. The unit mounts on any of five popular makes of 1½ and 2-ton-rated trucks; adapts to special body designs; and derives power from the truck engine through a simple power take-off. Compressor is a Jaeger New Standard model, furnishing 125 cfm of 100-lb air. It is capable of driving two heavy duty or three medium-duty pavement breakers at full 90-pressure at the tools. Two levers in the truck cab control all functions. Compressing speed is 1,750 rpm (approximately 24 mph on the speedometer).—THE JAEGER MACHINE CO., 200 DUBLIN AVE., COLUMBUS 16, OHIO.

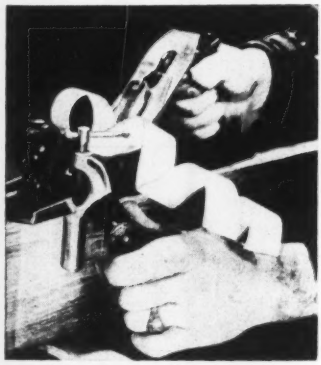

Plane cutting guide

Attachment for planes simplifies the cutting of square edges. The Square-Ezy consists of a clamp with a free-turning cylindrical sleeve that extends below the base of the plane. This sleeve acts as a fence and keeps the plane at a right angle to the side of

(Continued on page 123)

THE SPRING DOESN'T CARE!

When truck men talk shop, their opinions often vary as to how to make a tough haul easier. Yet, they *do* agree that when extra speed or power is needed, shifting must be *quick, easy* and *positive!* That's why so many prefer Timken-Detroit Two-Speed Double-Reduction Final Drives with Spring-Flex Power Shift!

The easy, instantly responsive control of the Timken-Detroit Two-Speed Double-Reduction Final Drive is not dependent upon the type of power unit used for actuation. It is controlled by the flexible, predetermined force of the spring *built into the shifting mechanism!* What's more, this rugged power shift is available with electric, vacuum or compressed air actuation —depending on your individual needs and preferences.

If you build or buy trucks, specify Timken-Detroit Two-Speed Double-Reduction Final Drives with Spring-Flex Power Shift! They're *proved* by years of trouble-free operation.

TIMKEN-DETROIT

SPRING-FLEX POWER SHIFT OPERATES EQUALLY FAST AND DEPENDABLY WITH ANY TYPE OF ACTUATION—ELECTRIC MOTOR, VACUUM OR COMPRESSED AIR! IT'S THE SPRING THAT DOES THE ACTUAL SHIFTING!

WRITE FOR FREE LITERATURE AND PERFORMANCE DATA!

TIMKEN Detroit AXLES

A PRODUCT OF THE TIMKEN-DETROIT AXLE COMPANY

DETROIT 32, MICHIGAN

The Accepted D A Standard

TRADE MARK REGISTERED

PLANTS AT: DETROIT AND JACKSON, MICH. • OSHKOSH, WIS. • UTICA, N. Y. • ASHTABULA, KENTON AND NEWARK, OHIO • NEW CASTLE, PA.

The tougher the job...

the greater the need for

"HERCULES"
REG. U.S. PAT. OFF.
RED-STRAND
WIRE ROPE

Its fitness for tough work has been proved by many years of actual on-the-job performance. Strength, toughness, flexibility and durability . . . *in correct balance* . . . provide safe, dependable, and economical wire rope service.

"HERCULES" (Red-Strand) Wire Rope was originated by Leschen in 1886 to meet the rope requirements of bigger, better material handling equipment—and tough jobs have been its proving grounds ever since.

Let the Red-Strand be *your* wire rope guide. You will find its reputation justly earned.

Round Strand or Flattened Strand — Preformed or Non-Preformed — Wire Rope Core or Fiber Core. Let us help you select the *right* rope for your job.

We Invite Your Inquiries

MADE ONLY BY

A. LESCHEN & SONS ROPE CO. 5909 KENNERLY AVE. • ST. LOUIS 12, MO.

ESTABLISHED 1857

New York 6 · Chicago 7 · Birmingham 6 · Houston 3 · Denver 2 · Los Angeles 21 · San Francisco 7 · Portland 9 · Seattle 4

the board being planed. Hardwood knob on the side provides a firm grip and permits putting sideward and downward pressure on the plane. Uniform bevel is obtained by adjusting angle of the plane's blade.—Bratton Co., Edwardsville, Kans.



Automatic welder

Line of automatic welding and positioning equipment is designed for rebuilding tractor idlers and rollers, shovel rollers and shafts, crusher cones, and similar equipment. It utilizes the submerged arc principle of automatic welding, and an ac transformer-type welding machine in conjunction with a work positioner that handles parts weighing up to 750 lb and whose diameter is not less than 4 in. or greater than 36 in.—Mir-O-Col Alloy Co., Inc., 312 North Ave. 21, Los Angeles 31, Calif.

Ignition moisture-proofer

Automotive sealing substance protects ignition systems against corrosion, oxidation, and moisture. Elek-Trik seal is a heavy liquid that creates a neutral zone between electric current and the outside atmosphere when applied to distributor, coil, spark plugs, and battery. The application is guaranteed for 1 yr.—Elek-Trik Seal Laboratories, 151 W. Elm St., Chicago 10, Ill.



Baseboard radiator

Convect-O-Base radiator can be installed on the rough framework and installation completed while all piping is accessible for testing. It con-

(Continued on next page)

Heltzel
BUILDS IT BETTER

GEARED TO YOUR PRODUCTION NEEDS



STATIONARY BATCHING PLANTS



PORTABLE BULK CEMENT PLANTS

PORTABLE AGGREGATE PLANTS

Engineered FOR THE JOB

● Heltzel-engineered equipment provides that element of efficiency so important when man hours count highly. Each product in the Heltzel line is backed by 40 years experience in the concrete industry. Contractors and concrete producers know that Heltzel builds quality, high performance equipment. It stands the test of time and rugged operating conditions. Some of the Heltzel line of products are pictured here.

Specific information on any Heltzel equipment may be had by writing to our Warren office or contacting your nearest Heltzel distributor.

STEEL FORMS

CURB & GUTTER AIRPORT-HIGHWAY

SPECIAL FORMS

CONCRETE BUCKETS



STORAGE BINS



BELT CONVEYORS

BUCKET ELEVATORS

HELTZEL

STEEL FORM & IRON CO.

WARREN, OHIO

THE JOB MUST GO ON!

MARLOW pumps help Bechtel Corporation cross difficult swamplands

This natural gas pipeline is being constructed between the Texas Gulf Coast and Joliet, Illinois, across all kinds of terrain. At one of the worst spots — this swampy stretch at Newport, Arkansas — the contractor had to put weights on the pipe to sink it below the mud. And under conditions as tough as they come, the Marlow pump shown, a Model 641 Self-Priming Centrifugal, stays on the job and helps construction move ahead smoothly.

This job furnishes another example of Marlow stamina and dependability. **REMEMBER!** Marlow pumps have been helping contractors solve difficult pumping problems for over a quarter of a century. Let Marlow pumps help you cut costs and safeguard your profits.

Write for information and name of nearest dealer

MARLOW PUMPS 510 GREENWOOD AVE. RIDGEWOOD, N. J.

Manufacturers of the World's Most Complete Line of Construction Pumps

MOTT Diamond Core Drilling Contractors

FOUNDATION TESTING
for
Bridges, Dams, Heavy Structures
PRESSURE GROUTING

MFR'S DIAMOND & SHOT CORE DRILLS, GROUT MIXING MACHINES, PACKERS AND GROUT PUMPS

MOTT CORE DRILLING CO.
HUNTINGTON W. VA.

WELDING CONNECTORS

Saxe System Welded Connection Units for welded assembly

Saxe Units place in position and securely hold together structural parts to be welded.

As used in many welded structures they *eliminate all hole punching*, producing an economical, rigid, safe and quickly erected structural frame.

Write for 58 pg. Manual containing full engineering design information for welded structures.

J. H. WILLIAMS & COMPANY
Buffalo-7 New York
Canadian Representatives
Air Reduction Canada, Ltd. Montreal 2, Canada

sists of three units—a back cover, heating section, and a front cover. The back cover nails directly to the studs or furring strips, and can be recessed or flush mounted on remodeling installations. It can be cut to any desired length, or mitered to fit any angle or corner. Heating sections mount on self-locking pipe supports and fit into holes provided in the back cover. Front cover slips into the upper slot of the back cover. It can be removed at any time without disturbing wall, quarter round, or back cover.—THE MINIMITE CO., 3700 W. ROOSEVELT ROAD, CHICAGO, ILL.



Conveyor return idler

Self-aligning idler is designed to prevent belt damage caused by roving at the edges on the return run where belt is closely confined between frame and supports. It also assures that the belt is centered when entering the tail pulley. The 33RA idler is mounted on a roller-bearing turntable, with the entire assembly tilted 45 deg in the direction of return belt travel. The idler can be used with horizontal or inclined conveyors.—CHAIN BELT CO., DEPT. PR, 1633 W. BRUCE ST., MILWAUKEE 4, WIS.

New Product Briefs

Faceshields feature interchangeable visors for specific types of hazards. Made by: Mine Safety Appliances Co., Pittsburgh 8, Pa.

Horizontal circulators for forced-circulation hot-water heating systems in large buildings is available in three sizes. Made by: Taco Heaters, Inc., Providence 3, R. I.

Plastic finish for Monowall predecorated panelboard (Armstrong Cork Co.) replaces paint-type finishes previously used. It produces a lustrous, durable surface.

Self-sticking safety signs are coated with silicone to protect them from dirt, grime, moisture and weather. Quik-Labels are made by: W. H. Brady Co., Chippewa Falls, Wis.

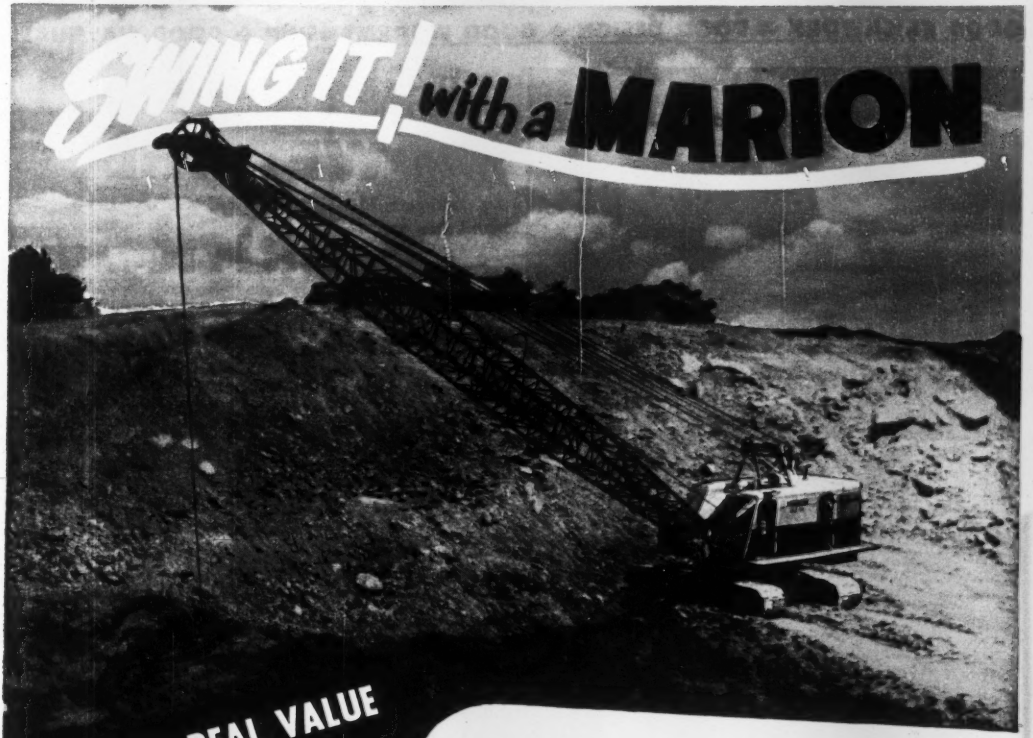

And Get REAL VALUE in DRAGLINES

Want to get more for your dragline dollars?

If so, consider what it takes to make a dragline great.

MARION, in more than 65 years of progress, knows there are no substitutes for experienced design, quality materials and careful workmanship if a dragline is to do its job well and faithfully over the years.

MARION builds draglines to **do a job**—not just to "get by" or to "meet a price." MARION builds a size and type to meet every need.

Let your nearest MARION Sales Representative or Distributor show you how easy it is to own today's outstanding Dragline Value.

MARION POWER SHOVEL CO.
MARION, OHIO, U. S. A.
OFFICES AND WAREHOUSES IN ALL PRINCIPAL CITIES

GOOD BRICKWORK = GOOD DESIGN + GOOD WORKMANSHIP + GOOD MATERIALS

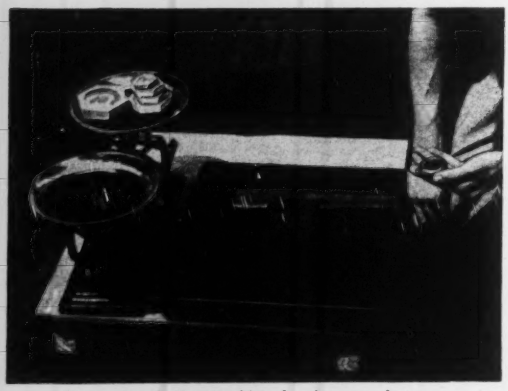

When placed flat in ¼-inch of water for one minute, a brick should gain not more than 20 grams (7/10 oz.)

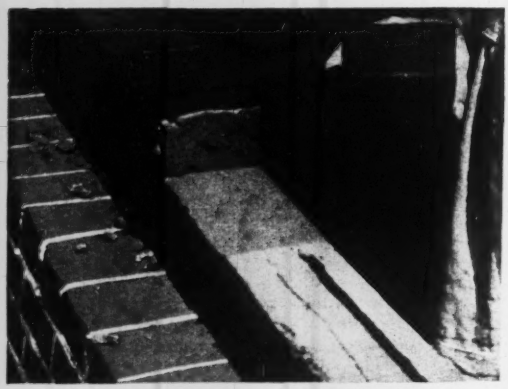

A good bond was not secured here because the brick on which the mortar was spread had sucked the mortar dry, before the brick was laid.

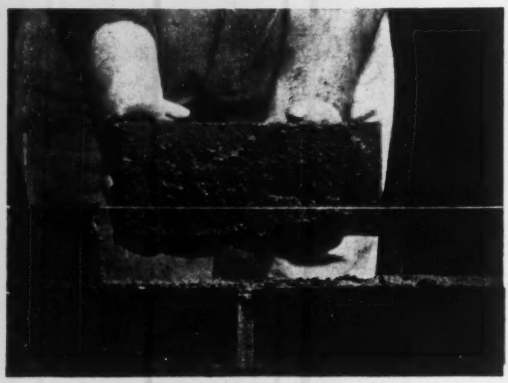

A good bond was secured here because the mortar was not sucked dry too fast.

WET THE BRICK TO SECURE A WATERTIGHT BOND

WE SUGGEST THAT—

Brick taken from the scaffold should be tested for rate of absorption, as illustrated at top left. If the tested brick gains more than 1 ounce in weight, all brick should be thoroughly wet just before they are used.

A good initial bond between brick and mortar depends (1) upon the suction rate of the brick, and (2) the water-retaining capacity of the mortar.

If the absorption rate of the brick is too high at the time they are laid, they will suck the water out of the mortar too fast, even though the mortar has high water-retaining capacity. A thorough wetting of the brick just before they are laid is the only way to be *sure* they will have a low enough rate of absorption.

BRIXMENT

Brixment mortar has higher water-retaining capacity and stays soft and plastic longer when spread on porous brick. This helps secure a good, watertight bond.

LOUISVILLE CEMENT COMPANY, Incorporated, LOUISVILLE, KENTUCKY

MANUFACTURERS' PUBLICATIONS

Fenestra building panels—Steel and aluminum building panels are described in this 38-p data book. It provides detailed panel-selection tables as a guide to choice of the most economical Fenestra panel for a given span and load. Detail section has been revised to represent current practice. The catalog contains numerous photos of new job installations. Complete descriptions are listed for various wall, deck, and floor panels. — DETROIT STEEL PRODUCTS CO., 3159 GRIFFIN ST., DETROIT 11, MICH.

Meter-repair manual – Informative handbook contains illustrated step-by-step instructions for repair and testing of Trident split case water meters. This 16-p booklet contains complete instructions for setting up a meter repair shop—including photographs and floor plans of typical shops, a list of required tools and equipment, and suggested meter record forms.—NEPTUNE METER CO., 50 W. 50TH ST., NEW YORK 20, N. Y.

Rubber conservation—Complete plan for obtaining maximum life from industrial rubber products has been evolved by Quaker. Details are contained in: A conservation manual listing suggestions on care and maintenance of rubber products; a wall chart that lists and explains vital necessary steps in conserving belting, hose, and packings; and maintenance memos to be distributed periodically.—QUAKER RUBBER CORP., DIV. H. K. PORTER CO., INC., TACONY & COMLY, PHILADELPHIA 24, PA.

Roof maintenance—Brochure entitled "Solving Roof Problems" thoroughly explores the subject, and discusses in detail: Types of roofs, how they are built, factors that enter into their deterioration, and how roof troubles can be diagnosed and treated. For easy reference, the booklet is divided into 15 sections and provides a table of contents.—THE TREMCO MFG. CO., 8701 KINSMAN ROAD, CLEVELAND 4, OHIO.

Lubricated plug valves—Manual is packed with piping, wiring, mounting, and installation data for power-operated lubricated plug valves. Manual V-214 is a complete compilation of technical data covering the use of pneumatic, hydraulic, and electric operators for this type of valve. Included are typical piping diagrams,

(Continued on page 131)

• Contractors & Engineers

FIELD OFFICE TRAILER

Modernize your field office with latest and up to date office trailer — designed to meet your requirements.

Model #10 29' overall, $2995 f.o.b. Balto. with toilet and lavatory $200 extra.



Model #20 35' overall, $3295 f.o.b. South Whitley, Ind. with toilet and lavatory $200 extra

Spec. each trailer—Natural beautiful birch finish—drafting table, 8'x3'-6"—8 letter files built in—8 drawers—cabinets—one closet—heated with oil stove—insulated—electric lights—wired for 2 telephones—2 rooms.

TRAILER VILLAGE, INC.
8645 Pulaski Highway
Balto, 21, Md.
Phone Essex 2233

Please send me office trailer plan Model No. .... and pictures of interior.

Name .....
Firm Name .....
Address .....

FLOORS CAN BE

FOR LONG LASTING, HEAVY DUTY
DRIVEWAYS
TRUCKING AISLES
INDUSTRIAL FLOORS
AND THE LIKE

Specify

"ARMOURING"
TRADE MARK

THE ORIGINAL STEEL MESH
FLOOR SURFACE REINFORCEMENT
SHOCK-PROOF
WEAR-PROOF
CRACK-PROOF

• Catalog on Request

IRVING SUBWAY GRATING CO., INC.
5063 27th St., Long Island City 1, N. Y.
1863 Tenth St., Oakland 20, Calif.

GRIFFIN has dried thousands of them! Our WELLPOINT SYSTEMS and know-how let you "work dry"—at lower cost!

FREE* HANDBOOK

BE SURE: Let us estimate dewatering costs for your next job.

GRIFFIN WELLPOINT CORPORATION
881 East 141st Street, New York 54, N. Y
Please send me free copy of "WELLPOINT SYSTEM in Principle and Practice."
Name .....
Title .....
Firm .....
Address .....

Clip this coupon to your letterhead. FREE to Engineers and Contractors, only. Regular price to all others, $1.50.

Le Roi gives you more for your MONEY!

more utility
more profits

TRACTAIR'S THE BUY-

Mobility

Tractair Gets Around thanks to good weight distribution, excellent traction, and a powerful 35 hp. engine. You have economical air-power when you need it despite rough ground, mud, and steep inclines.

Secondary Drilling on a mountain highway relocation and grading job is made easy with Le Roi-CLEVELAND sinkers and self-propelled air-power from Tractair.

Earth Boring

Drilling Anchor Holes with an auger air-powered by mobile Tractair saved a utility company $18,000.

Rock Drilling

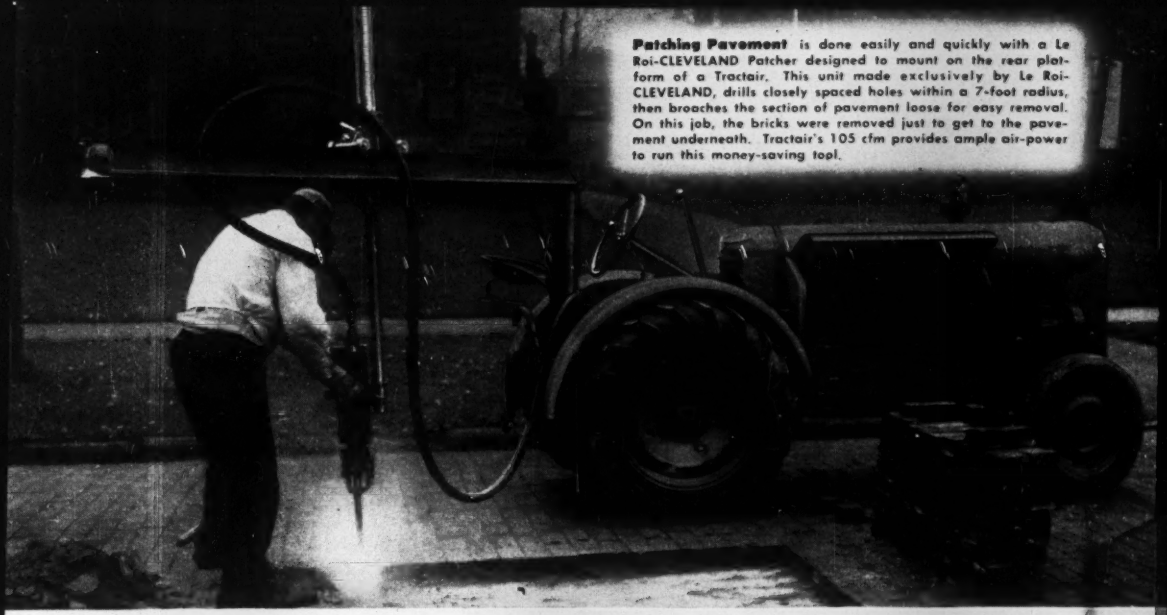

Patching Pavement is done easily and quickly with a Le Roi-CLEVELAND Patcher designed to mount on the rear platform of a Tractair. This unit made exclusively by Le Roi-CLEVELAND, drills closely spaced holes within a 7-foot radius, then broaches the section of pavement loose for easy removal. On this job, the bricks were removed just to get to the pavement underneath. Tractair's 105 cfm provides ample air-power to run this money-saving tool.

for Money-saving Usefulness

You get air power and tractor power in a single self-contained unit

Just think what you can do with air power to keep your costs down — break pavement, dig clay, drill rock, tamp fill, vibrate concrete, and many other jobs.

And Tractair gives you *self-propelled* air power for still greater utility — anywhere, anytime. There's no need to tie up trucks or men for transportation. Tractair does it all. Lets you put the money-saving usefulness of air to work where you need it.

Moreover, Tractair can be equipped with a sturdy front-end loader having eight quickly interchangeable accessories. When so-equipped Tractair handles loading, lifting, back-filling, and snow-plowing in addition to its other duties.

That's why Tractair's the buy for money-saving usefulness. And you cut costs further still when you team Tractair with Le Roi-CLEVELAND air tools. Job data-sheets and bulletins showing how Tractair saved money for others are available upon request. Write today.

LE ROI

LE ROI COMPANY

MILWAUKEE 14, WISCONSIN

PLANTS: MILWAUKEE • CLEVELAND • GREENWICH, OHIO

T-15

Distributors in all these principal cities

ALABAMA: Birmingham, Mobile — ARIZONA: Phoenix — ARKANSAS: Little Rock — CALIFORNIA: Bakersfield, Long Beach, Los Angeles, San Francisco—COLORADO: Denver, Grand Junction — CONNECTICUT: Hartford — FLORIDA: Jacksonville, Miami, Tampa — GEORGIA: Decatur—IDAHO: Boise, Idaho Falls, Twin Falls, Wallace—ILLINOIS: Chicago —INDIANA: Indianapolis—IOWA: Cedar Rapids, Waterloo—KANSAS: Great Bend, Kansas City, Pratt, Wichita — KENTUCKY: Lexington, Louisville — LOUISIANA: New Orleans, Shreveport — MAINE: Augusta — MARYLAND: Baltimore, Hyattsville — MASSACHUSETTS: Hyde Park, Newton Highlands — MICHIGAN: Detroit, Grand Rapids — MINNESOTA: Duluth, Minneapolis — MISSISSIPPI: Jackson — MISSOURI: Joplin, St. Louis — MONTANA: Billings, Great Falls — NEBRASKA: Omaha — NEW HAMPSHIRE: Manchester — NEW JERSEY: Cranford, Kingston — NEW MEXICO: Albuquerque — NEW YORK: Albany, Binghamton, Buffalo, Long Island City, Newburgh, Rochester, Saugerties, Syracuse, Woodside (L.I.) — NORTH CAROLINA: Charlotte — NORTH DAKOTA: Fargo — OHIO: Cincinnati, Cleveland, Columbus, Dayton, Toledo—OKLAHOMA: Oklahoma City, Tulsa—OREGON: Portland — PENNSYLVANIA: Bethlehem, Harrisburg, Philadelphia, Pittsburgh — RHODE ISLAND: Providence — SOUTH CAROLINA: Columbia — SOUTH DAKOTA: Sioux Falls — TENNESSEE: Chattanooga, Knoxville, Memphis, Nashville — TEXAS: Dallas, El Paso, Houston, Lubbock, San Antonio — UTAH: Salt Lake City — VIRGINIA: Richmond, Roanoke — WASHINGTON: Seattle, Spokane — WEST VIRGINIA: Clarksburg, South Charleston — WISCONSIN: Milwaukee — WYOMING: Casper

NEW YORK CITY

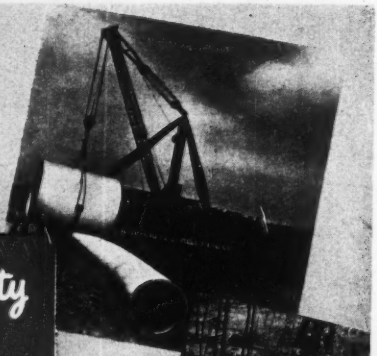

BOSTON MASS.

For Utmost Security

IMPORTANT AMERICAN CITIES INSTALL

LOCK JOINT

CONCRETE PRESSURE PIPE

HARTFORD CONN.

PORTLAND ME.

More than anyone else, those responsible for supplying water for domestic or industrial use appreciate the value of pipe lines which provide these four freedoms:

Freedom from:

- ★ Rupture or blow-out
- ★ Maintenance and repairs
- ★ Loss of carrying capacity
- ★ Corrosion or deterioration

The water works man who installs Lock Joint Concrete Pressure Pipe will have trouble-free pipe lines. The careful design of Lock Joint Pressure Pipe does not permit blow-out or rupture; its dense concrete walls are immune to tuberculation, corrosion or electrolytic attack; and its useful life has been estimated by competent hydraulic engineers at more than 100 years. Among Lock Joint's strongest supporters are the water works officials who have installed this type of pipe and who point to it as the most economical in their systems.

• • •

If you are quality minded yet cost conscious, specify Lock Joint Pressure Pipe, secure in the knowledge that you are receiving the best value the pipe industry can provide.

TULSA, OKLA.

NORFOLK, VA.

DENVER, COLO.



KANSAS CITY, MO.

LOCK JOINT PIPE COMPANY

Est. 1905

P. O. Box 269, East Orange, N. J.

Pressure Pipe Plants: Wharton, N. J., Turner, Kan., Detroit, Mich.

BRANCH OFFICES: Cheyenne, Wyo. Casper, Wyo. • Denver, Col. • Kansas City, Mo. Valley Park, Mo. • Wichita, Kan. • Chicago, Ill. Rock Island, Ill. • Kenilworth, N. J. • Hartford, Conn. • Tucumcari, N. Mex. • Tulsa, Okla. Oklahoma City, Okla. • Beloit, Wis. • Hato Rey, P. R.

SCOPE OF SERVICES—Lock Joint Pipe Company specializes in the manufacture and installation of Reinforced Concrete Pressure Pipe for Water Supply and Distribution Mains in a wide range of diameters as well as Concrete Pipes of all types for Sanitary Sewers, Storm Drains, Culverts and Subaqueous Lines.

arrangements for both side and top-mounted motor controls, closing speeds, wiring data, and an extensive group of photos of actual installations. —Rockwell Mfg. Co., 400 N. Lexington Ave., Pittsburgh 8, Pa.

Jaw crushers—Construction and operating data for jaw crushers are contained in this 8-pager. Data presented cover: Selection of the primary crusher; crusher capacity determines operating profit or less; pitman and jaws; jaw adjustment; bearings, and care and lubrication. A complete list of specifications and general data, and a table of capacities, complete the catalog.—Diamond Iron Works, Inc., 1766 N. 2nd St., Minneapolis 11, Minn.

Roller chains; sprockets—Catalog RS-50 covers a complete line of roller chains and sprockets carried as stock items. It provides complete specifications and engineering reference tables on American standard roller chains, sprockets, and attachments. Dimensional data, strengths, and weights are supplied for allied products, such as block chain, cable chain, and flexible couplings.—Whitney Chain Co., 222EN Hamilton St., Hartford 2, Conn.

Molded terminal blocks—Solderless-type Bepco molded terminal block is described in a 1-p bulletin. A special feature described is that this block eliminates wrapping wires around studs or applying terminal to wire ends. The data sheet lists typical combinations that can be accommodated by a single terminal, and describes other features.—Buchanan Electrical Products Corp., 1290 Central Ave., Hillside, N. J.

Diesel engines—Heavy-duty diesels for all types of haulage units are listed in 12-p Bulletin 1526. Outstanding features are listed with special emphasis on Dyna-Swirl, a mono-lobe low-pressure-rise combustion system. Specifications are listed for engines ranging from 185 to 350 hp. On-the-job photos coupled with short case histories illustrate typical applications of these diesels.—The Buda Co., Harvey, Ill.

Copper flashings—Two bulletins released by Chase describe a copper-base flashing expansion joint, and a one-piece thru-wall copper flashing and cap flashing receiver. Both catalogs describe these flashings in detail, listing their particular construction and installation advantages.—Chase Brass & Copper Co., Inc., Waterbury 20, Conn.

ADVERTISERS IN THIS ISSUE

Acker Drill Co. ... 62
American Cable Div., American Chain & Cable Co. ... 8
Aqua Survey & Instrument Co. ... 97
Arkwright Finishing Co. ... 14
Atlantic Steel Corp. ... 97
Austin-Western Co. ... 59

Belmont Iron Works ... 70
Berger & Sons, Inc., C. L. ... 2
Bethlehem Steel Co. ... 60
Butler Bin Co. ... 95
Byers Co., A. M. ... 2nd cover

Carlon Products Corp. ... 80
Cement Gun Company ... 91
Chapman Valve & Mfg. Co. ... 83
Chicago Pneumatic Tool Co. ... 84
Cities Service Companies ... 54
Cleaver Brooks Company ... 38
Complete Machinery & Equipment Co. ... 77
Continental Motors Corp. ... 55

Detroit Diesel Engine Div., General Motors Corp. ... 118
Douglas Fir Plywood Assn. ... 56, 57
Dow Chemical Company ... 12
Dravo Corp. ... 65
Dresser Mfg. Div., Dresser Ind. ... 42

Electric Tamper & Equipment Co. ... 20
Eppinger & Russell Co. ... 98

Fabricated Products Co. ... 98
Flexible Steel Lacing Co. ... 68
Four Wheel Drive Auto Co. ... 63
Fuller Mfg. Co. ... 99

Goodyear Tire & Rubber Company ... 1
Gordon Smith & Company, Inc. ... 68
Great Lakes Carbon Corp. ... 93
Griffin Wellpoint Corp. ... 127
Gunite Concrete & Construction Company ... 70
Gunite Construction Company ... 82

Heil Company ... 66, 67
Heltzel Steel Form & Iron Company ... 123
Hendrick Manufacturing Company ... 74

Imperial Pencil Tracing Cloth ... 58
International Harvester Co. ... 64
Irving Subway Grating Co. ... 127
Irvington Form & Tank Corp. ... 100

Joy Mfg. Co. ... 16

Koppers Co. ... 73

LaCrosse Trailer Corp. ... 61
Ladish Co. ... insert 49
Lamson & Sessions Co. ... 79
Lee & Son, W. W. ... 92
LeRoi Co. ... 128, 129
Leschen & Sons Rope Co., A. ... 122
LeTourneau Inc., R. G. ... 4
Lock Joint Pipe Co. ... 130
Louisville Cement Co. ... 126

MacArthur Concrete Pile Corp. ... 98
Mack Trucks, Inc. ... 7
Marion Metal Products Co. ... 70
Marion Power Shovel Co. ... 125
Marlow Pumps ... 124
Master Builders Company ... 3rd Cover
McGraw-Hill Book Company ... 47
McKiernan-Terry Corp. ... 51
Morris Machine Works ... 52
Mott Core Drilling Co. ... 124
Murphy Diesel Corp. ... 5

National Tube Co. ... 53
Naylor Pipe Co. ... 69
Northwest Engineering Co. ... 3

Ohio Locomotive Crane Co. ... 120
Owen Bucket Company ... 15
Owen-Illinois Glass Company ... 50

Pennsylvania Drilling Co. ... 103
Pittsburgh-Des Moines Steel Co. ... 100
Plasteel Products Co. ... 45
Portland Cement Assn. ... 18
Pressure Concrete Company ... 103

Raymond Concrete Pile Co. ... 71
Rogers Bros. Corp. ... 78
Ryerson & Sons, Inc., Jos. T. ... 92

Sauerman Bros., Inc. ... 74
Sherman Products Inc. ... 99
Silent Hoist & Crane Co. ... 91
Smith Co., S. Morgan ... 46
Spencer, White & Prentis, Inc. ... 100
Sprague & Henwood, Inc. ... 82
Standard Steel Works ... 82
Stang Corp., John W. ... 93

Termite Drills, Inc. ... 65
Texas Company ... 4th cover
Thew Shovel Co. ... 13
Timber Engineering Co. ... 77
Timken-Detroit Axle Co. ... 121
Timken Roller Bearing Co. ... 6
Tinney Drilling Company ... 120
Torrington Co., Bantam Bearings Div. ... 89
Trailer Village, Inc. ... 127
Tri-Lok Co. ... 65
Tubing Appliance Company ... 62

U. S. Pipe & Foundry Co. ... 75
Universal Atlas Cement Co. ... 22
Universal Form Clamp Co. ... 72
Universal Manufacturing Co. ... 9
Universal Sewer Pipe Corp. ... 76

Vulcan Iron Works ... 48

Warner & Swasey Co. ... 34
Westinghouse Electric Corp. ... 10, 11
Williams Co., J. H. ... 124
Wood & Co., R. D. ... 120

Professional Services ... 117

SEARCHLIGHT SECTION

(Classified Advertising)

Employment
Positions Vacant ... 107, 109
Selling Opportunities Offered ... 107
Positions Wanted ... 107, 108
Selling Opportunities Wanted ... 108
Employment Services ... 107

Special Services
Contract Work ... 108
Erection ... 108

Educational
Schools ... 108
Tutoring ... 108

Business Opportunities
Offered ... 108

Notices
Proposal ... 104, 105, 106

Equipment
(Used or Surplus New)
For Rent ... 116
For Sale ... 108-117
Piling ... 112
Pipe ... 116
Rail ... 117
Surveying Instruments ... 114

Wanted
Equipment ... 116

ADVERTISERS INDEX ... 108

ENGINEERING NEWS-RECORD

E. E. Weyeneth, *Manager* — Howard T. Olsen, *Assistant Manager*

I. G. Johnson, *Business Manager*

Sales Representatives: D. S. Robertson and E. A. Callahan, Jr., 330 W. 42nd St., *New York*; F. G. Hudson, L. H. Hunt, W. G. Payne, 520 N. Michigan Ave., *Chicago*; J. W. Otterson, R. E. Durland, 68 Post St., *San Francisco*; A. R. Cazeaux, 17th & Sansom Streets, *Philadelphia*; E. E. Duff, Jr., Hanna Bldg., *Cleveland*; B. F. Horn, Penobscot Bldg., *Detroit*; W. E. Donnell, Continental Bldg., *St. Louis*; H. L. Keeler, 1111 Wilshire Blvd., *Los Angeles*; R. C. Maultsby, Rhodes-Haverty Bldg., *Atlanta*; J. H. Allen, Jr., First National Bank Bldg., *Dallas*. *Other Sales Offices:* 738-39 Oliver Bldg., *Pittsburgh*; 1427 Statler Bldg., *Boston*; Aldwych House, *London*.

Letter from GUADALAJARA

Marking Guadalajara as probably the fastest growing city in today's Mexico are the newly inaugurated hydro-electric plant that will eventually furnish this old pottery center with 72,000 kilowatts for its expanding industries, and its new $1,400,000 airport, the "best" in all Mexico—high in importance to the mountain-locked area.

These two projects have come to completion under the energetic leadership of cocky young Governor Jesus Gonzallez Gallo.

Forty kilometers from Guadalajara is a 500-meter drop in the Rio Santiago where a reinforced concrete dam has been built to a height of 80 feet above the river. Water from the river is conducted under pressure through a tunnel of 4.35 meters in diameter to four steel penstocks, 2.22 meters in diameter, which deliver the water to four vertical turbines of 18,000-hp each under a head of 500 meters.

These connect with four generators of 12,800 kw each. Twelve transformers, in sets of three, transform current from 13,800 volts to 70,000 volts for transmission. These installations with others available in the area give Guadalajara some 100,000 kw. Plans now are to raise this eventually to 1,000,000 kw.

Cost of the plant is $10,000,000.

Guadalajara, "Pearl of the West", has leaped in population from 100,000 five decades ago to more than 300,000 today. Now it is only a nose behind Monterrey, long Mexico's second city, an industrial center of 329,000 residents.

• A sudden stir—In waking the 400-year-old city, Gonzallez has instituted a whirlwind of re-building, re-planning and general industrial expansion that has swept churches and buildings out of its path to widen streets, turning the historic town into a modern Main Street.

In addition to the new power plant and the airport, Guadalajara is building a water system to handle a population of one million (its present goal), a new rail terminal, and good highway and rail connections with the Pacific ports of Manzanillo and Puerto Vallarta.

At its own $5,000,000 Instituto Technologico of the University of Guadalajara the city is training the skilled workers and civil engineers needed for industrial expansion.

COLIMILLA, new $10,000,000 hydro-electric plant, is constructed on the Rio Santiago 40 kilometers outside of Guadalajara. The plant will provide power for new industry. When full equipment is installed it will eventually supply 72,000 kw for Cia. Electrica de Japala. President Miguel Aleman himself visited Guadalajara for its formal inauguration this year.

Already a big industrial impetus is felt in this city. Sixteen new industries began operations in 1949; 10 new plants opened in 1950. Now Gov. Gonzallez is looking to foreign firms to come into the city to start even larger operations.

Firms from the United States will have every cooperation, he says. They will find cheaper power, plus tax and land concessions. Labor costs for trained and skilled operators will also be lower than in some other places.

• Business moves in—A number of United States firms have opened shop in the city: U. S. Celanese Corp. through its Mexican subsidiary, Celanesa Mexicana; Corn Products of Chicago; Sears, Roebuck; Cocoa Cola; Pepsi Cola, and several agricultural implement firms from the U. S.

Modernization has also moved forward with the completion of a four lane super-highway to the new airport, a subterranean street crossing at the principal intersection of the city where street venders have been installed in newly built shops, a new "cut-off" highway to eliminate truck traffic from going through the business section, the rebuilding of a sewerage and drain system which is expected to serve the city for 50 years, complete paving of all streets in the city, construction of new parks in the center of the city and elsewhere, a new freight terminal as well as a new passenger terminal and now, on the drawing board, a new bus terminal.

Firms interested by the facilities of this progressive Mexican town can write to Dr. Ricardo Zaldumbide, head of the Division de Investigation y Promocion Industrial, Instituto Technologio, Guadalajara.

Visitors probably will come to the city via the new airport with its two runways, the largest 2,200 meters in length, the second 1,800 meters.

With the cooperation and, sine quid non, financial help of the Communications ministry of the federal government, Governor Gonzallez has built the finest airport in Mexico for his state.

The central terminal building is two stories high with a control tower extending three floors above that. It is linked with the city by the highway already mentioned, and the grounds are already completely landscaped.

Thus the active city is only one hour from Mexico City by DC-6, and on the main route to Lower California.

So strategically located, this modern Mexico of which Guadalajara is prototype seems destined to success. Pottery is in the background. The city has risen from its ancient siestas to sieze the standards of speed and efficiency, moving into the latter half of the 20th Century with energy equal to any task ahead.



EVEN A SEARS, ROEBUCK to grace the modern street. This is a subsidiary of the Chicago firm. In keeping with the layout of the new city, the major portions of Guadalajara are modern in design, with old Spanish sidewalks.

Good Performance of Floors and Grout Assured In Crucible Steel's New Midland Plant because—

Three-stand — 4-high tandem mill by United for cold rolling stainless and alloy steel in new $18,000,000 plant of Crucible Steel Co. of America, Midland, Pa. Plant comprises three-quarters of a mile of connected buildings. Engr. — private plans; Gen'l Contr. — Rust Engineering Co., Pittsburgh, Pa. Non-colored and black Masterplate Floors in mill, tile red in motor room. Embeco grout for equipment.

All Concrete Floors Are MASTERPLATE . . . All Equipment Is Grouted with EMBECO

Many leading steel plants, like Crucible Steel Company's new hot and cold rolled stainless sheet and strip mill, have assured themselves of good performance and long-term economy in *floors* — by installing Masterplate Iron-Clad Concrete Floors; also in *equipment* grout — by using Non-Shrink Embeco.

Masterplate Floor . . . is a concrete floor with an iron-armored surface about one-eighth inch thick produced with Masterplate at time floor is installed. Wears at least 4-6 times longer than a plain concrete floor. Other features — spark-safe, static disseminating, non-dusting, corrosion resistant, easy-to-clean, non-slip, economical. Eleven colors.

Non-Shrink Embeco . . . when added to grouting mortar overcomes shrinkage, the principal cause of failure in machinery grouts. Embeco also produces easy placeability, early strength to avoid long costly shut-downs, 7 day normal strength in 24 hours with increased ultimate strength, and maximum bearing for bedplate.

Full information on Masterplate and Embeco on request.



Section of Masterplate Floor. Note Thickness of Armored Surface.



EMBECO Grout Is Non-Shrink

Plain Grout Shrinks

the MASTER BUILDERS Co

CLEVELAND 3, OHIO

TORONTO, ONTARIO

Removing a bottle-neck from New York-Boston highway

New 24-foot Texaco Asphaltic Concrete pavement for one-way traffic on Massachusetts State Highway 15. Note traffic using old road at left.

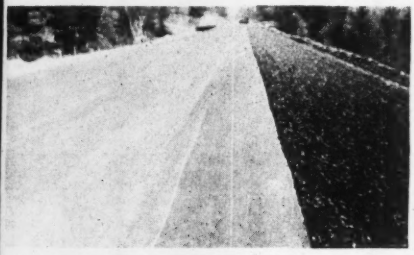

At right of Texaco Asphaltic Concrete pavement, a 10-foot parking strip is being constructed with Texaco Asphalt Penetration Macadam.

The highway linking New York City with Boston is one of the most heavily traveled in the country. To cut down travel time and provide greater safety for motorists using this highway, Massachusetts is converting 10 miles of Route 15, beginning at the Connecticut line, from a narrow, winding two-way road into a modern, divided superhighway.

Massachusetts specified a combination of asphalt types of construction for its important Route 15 project. Traffic moving in each direction will be served by a 24-foot wearing surface of hot-mix, hot-laid Asphaltic Concrete, laid in two 1½ inch courses. The foundation consists of 4½ inches of Asphalt Penetration Macadam, over a 12-inch gravel sub-base. On one side of the Asphaltic Concrete surface is a 10-foot Asphalt Macadam parking lane, with a 3-foot Asphalt Macadam shoulder on the other side.

From the construction of a superhighway down to the application of a dust-layer to a secondary gravel road, Texaco Asphalt Cements, Cutback Asphalts and Slow-curing Asphaltic Oils provide the road builder with a material exactly suited to his needs. Every Texaco Asphaltic product comes from selected crudes. Into its refining goes the broad experience acquired in meeting the varied asphalt requirements of America's road builders during the past 45 years.

Helpful information on all types of asphalt construction has been incorporated in two Texaco booklets, copies of which can be obtained free by writing our nearest office.

General contractors on the Massachusetts Route 15 projects are Kelleher Brothers, Inc. and White Oaks Company. Texaco Asphaltic Concrete paving is being laid by Bayer-Mingolia Company, with asphalt supplied by Wachusett Asphalt and Tar Company. Texaco Asphalt for Asphalt Macadam was applied by Lake Asphalt & Petroleum Company.

THE TEXAS COMPANY, Asphalt Sales Dept., 135 E. 42nd Street, New York City 17

Boston 16 Chicago 4 Denver 1 Houston 1 Jacksonville 2 Philadelphia 2 Richmond 19

TEXACO

REG. T M.

TEXACO ASPHALT